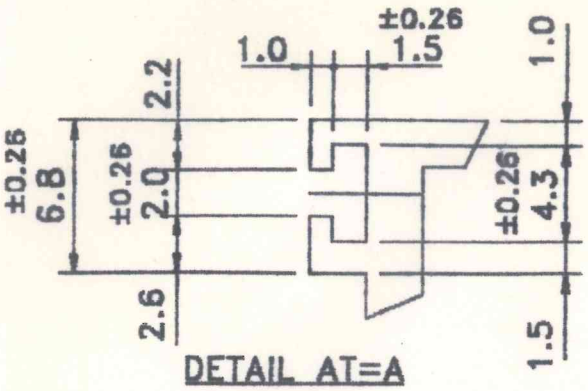

Note:-
R = 2.5R
* = 0.5R

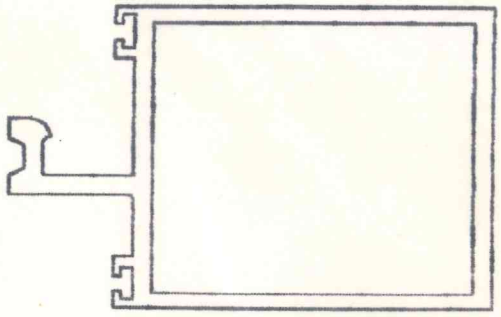

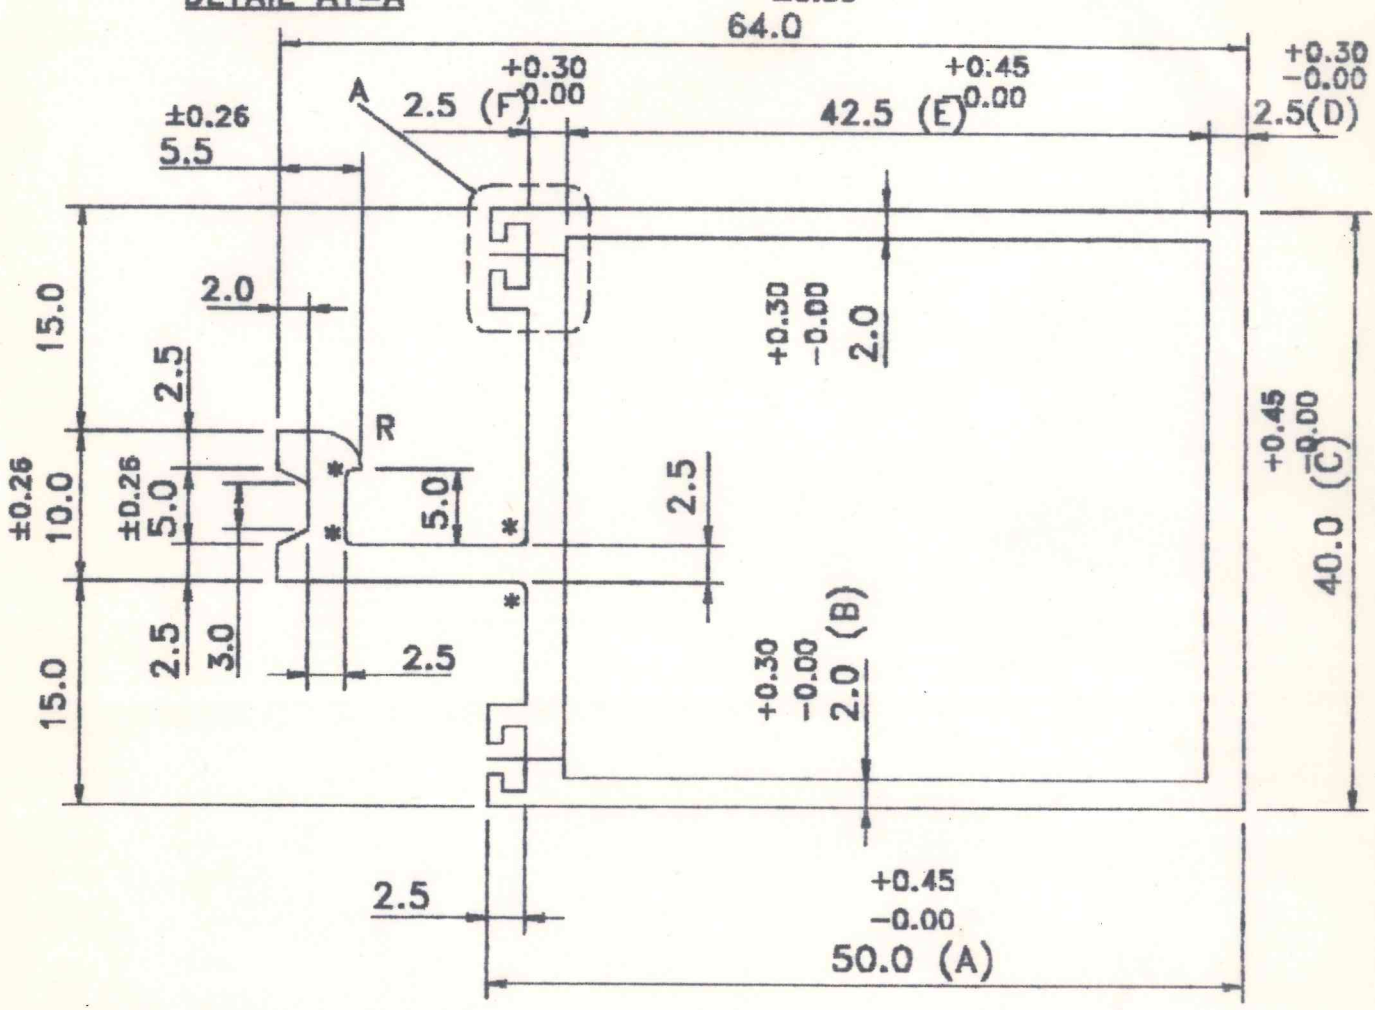

(2) TRANSOME

LOCATION:- P1=1Hole
ALL DIMENSION ARE IN M.M.
UNSPECIFIED CORNER RADIUS:0.40

TOL. AS PER B.S.1474:1987
UNLESS SPECIFIED

TWIST =1/4°/300 M.M.
STRAIGHTNESS= 1.5 M.M./MTR.
ANGULARITY = 2°

MAHAVIR ALUMINIUM LIMITED BHIWADI-301019

PARTY SAMPLE & DRG.	7/DIE/02	PARTY NAME	M/S. STAR ALUBUILD		REF.No. AS PER DRG. Date: 25.12.2003		
				DRAWN S.K.SHARMA	29.12.03	AREA: 458.0	MM²
				CHECKED	31.12.03	WEIGHT: 1.236	KG/M.
				APPROVED	31.12.03	WT. RANGE: —	Kg/12'
	(1)	TOL.ON REVISED A,B,C,D,E,F	10.1.04	SCALE 1:1&3:1	DATE	ALLOY: 6063 T6	
001	REF.	MKT-22/S-47/2003/04/1795 Date:3/2/04		CRITICAL DIM. *		MAL.No. 8474	
REV. STATUS	REV. NO.	DESCRIPTION	SIGN DATE	PERIMETER	INT. 157.0	SEC.NO.	D-3521
REVISION					EXT. 254.5		