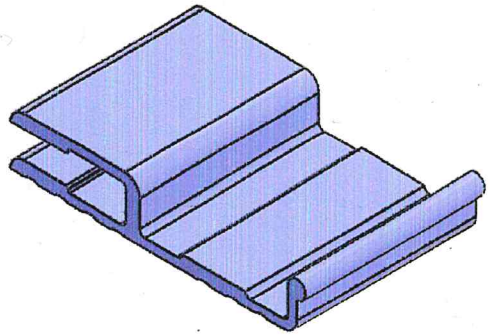

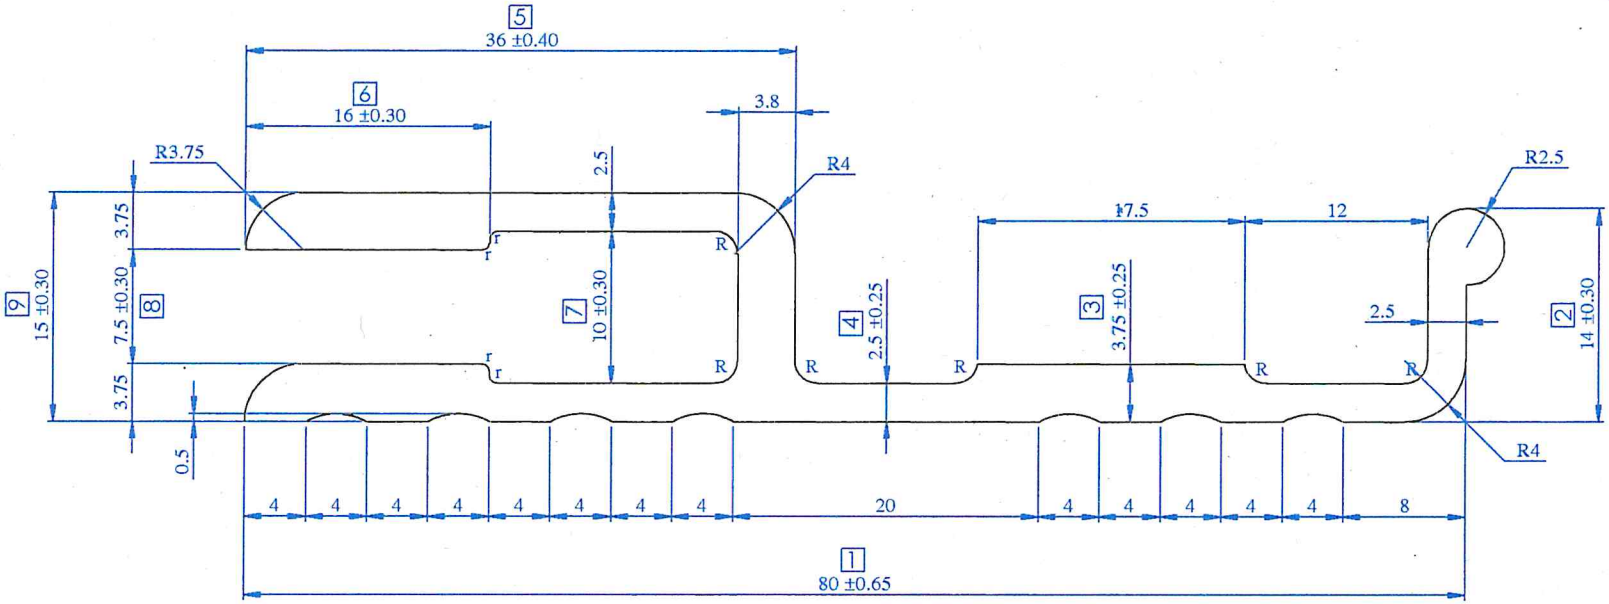

LOCATION:-P1 - 1HOLE
ALL DIMENSION ARE IN mm.
UNSPECIFIED CORNER RADIUS: 0.40

PLEASE SPECIFY THE EXPOSED SURFACE

TOL. AS PER BS EN 755-9:2008
UNLESS SPECIFIED

TWIST=±1/4°/300 M.M./M.
FLATNESS= WIDTH X 0.005mm.
STRAIGHTNESS= 1.50 M.M./MTR.
ANGULARITY=±1.5°

NOTE:-
r= 0.50R
R= 1.50R

INDO ALUSYS INDUSTRIES LIMITED BHIWADI RAJASTHAN - 301019

PARTY SAMPLE & DRG.	EXT315335453	PARTY NAME	M/S SARRK INTERNATIONAL				REF:- AS PER EMAIL ON Dt.-02.09.15		
				DRAWN	DHARMVIR	03.09.15	AREA	407.10	MM²
				CHECKED			WEIGHT	1.099	KG/M.
				APPROVED			WT. RANGE	-------	Kg/12
				SCALE	1:1 & 3:1	DATE	ALLOY	6063-T6	
00	(REF.)			CRITICAL DIM.	*		MAL NO	15128	
REV. STATUS	REV. NO.	DESCRIPTION	SIGN DATE	PERIMETER	INT.		SEC.NO.	D-6499	
A3		REVISION			EXT.	276.60			