



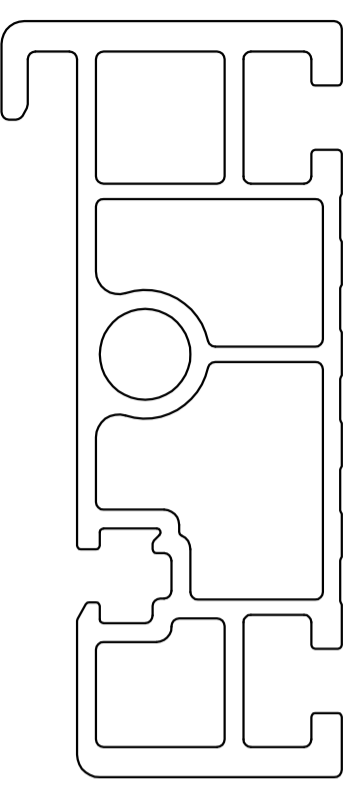
P-12795  
S3774  
E0116

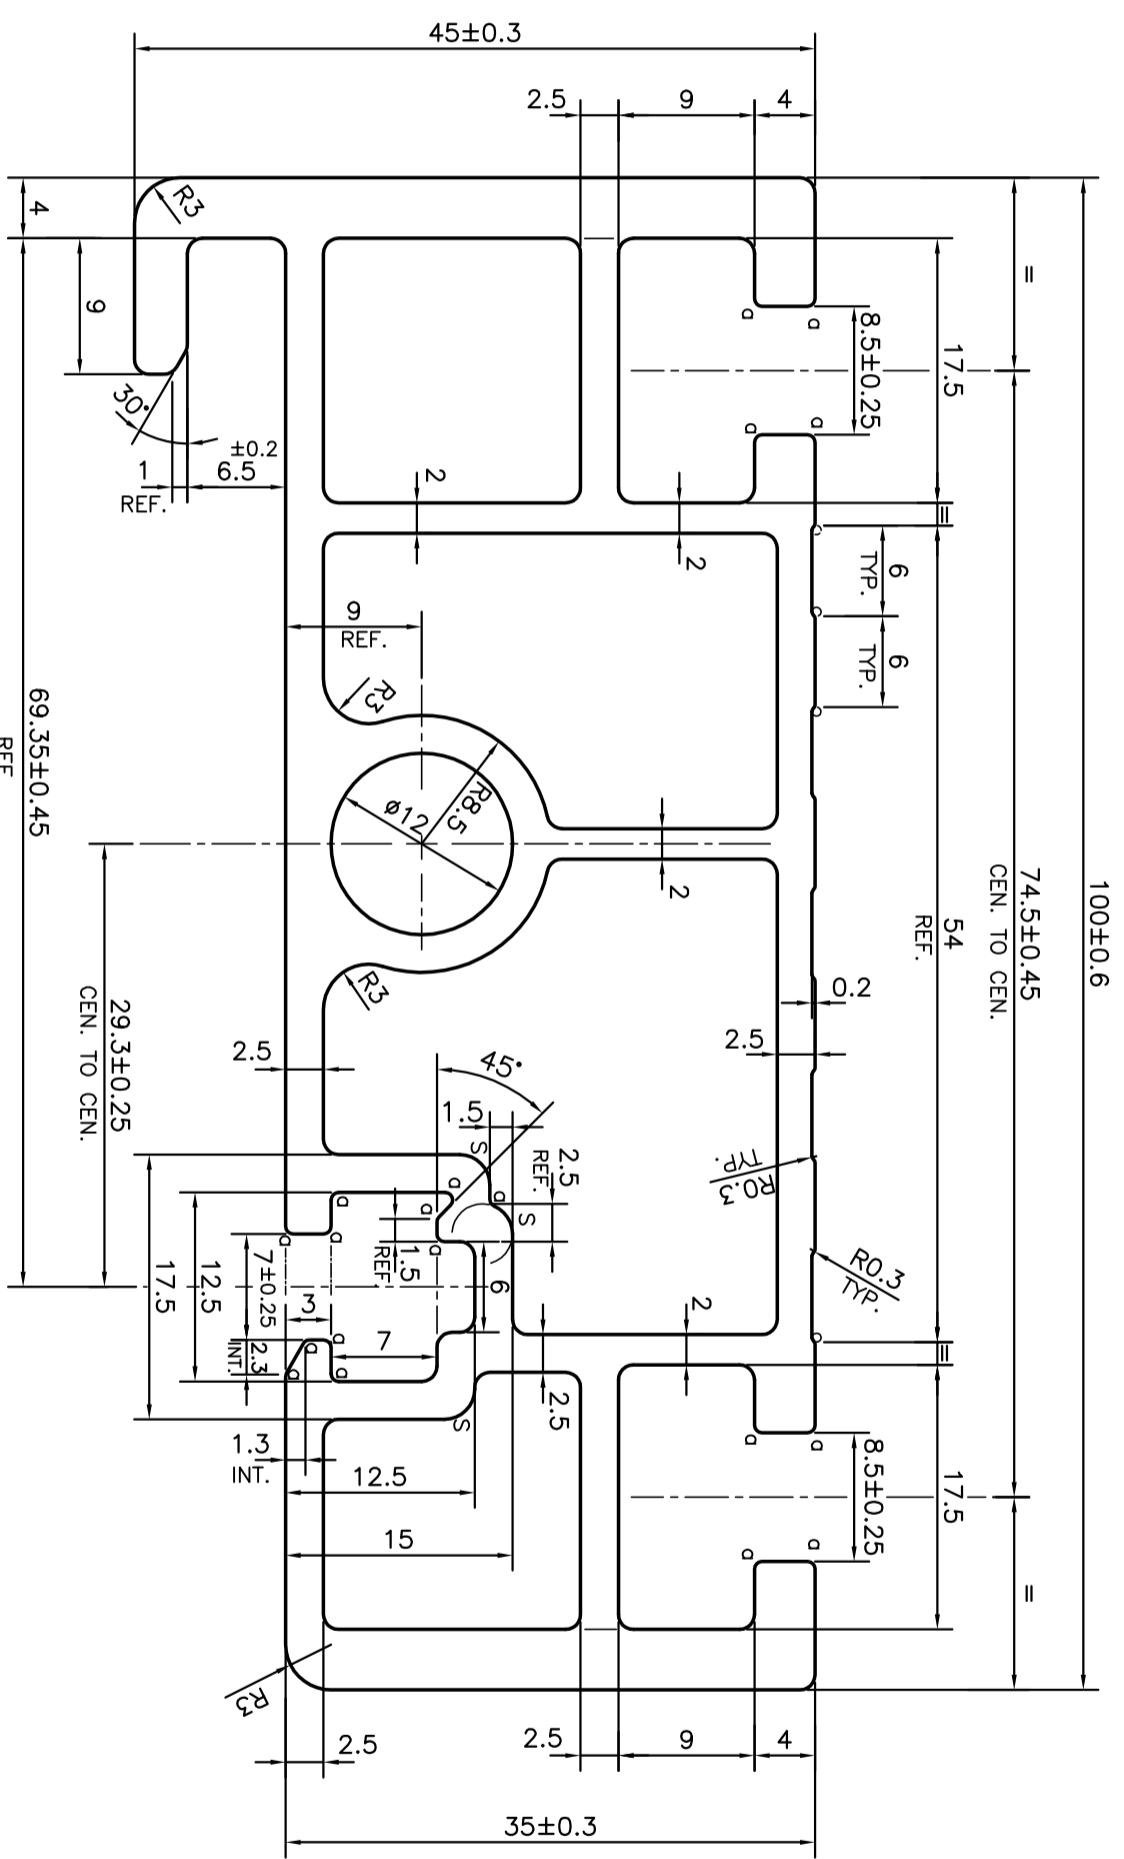

d = RADIUS 0.5 mm. (19 PLACES)  
S = RADIUS 2 mm. (3 PLACES)  
TWIST & BEND - 1 mm/METRE

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS		UPTO 320.00mm - ±1.70	
UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 1.0 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983, UNLESS OTHERWISE SPECIFIED		DRAWN <b>PARVESH</b> 18-05-2013 CHECKED APPROVED <b>S.S.GARG</b> 28-05-2013 SCALE 2:1 AREA mm <sup>2</sup> 1192.486 PERIMETER mm. 419.044 WEIGHT kg/m 3.220	
PARTY'S NAME	SIEGER SPINTECH EQUIPMENT (P) LTD., COIMBATORE	DRAWING No.	SECTION No.
PARTY'S DRAWING No.	14 LA 202/01	P-12795	-
ALLOY & TEMPER	6063 T6	S3774	S3774
DESCRIPTION	TEXTILE SECTION	E0116	E0116



SCALE: - 1:1