
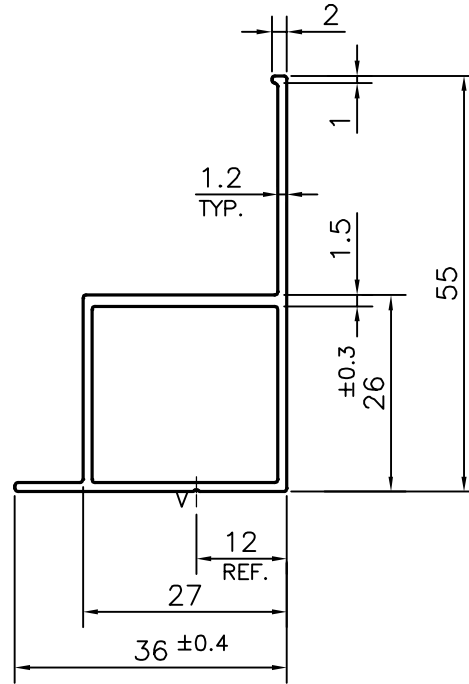


P-16545

E0550

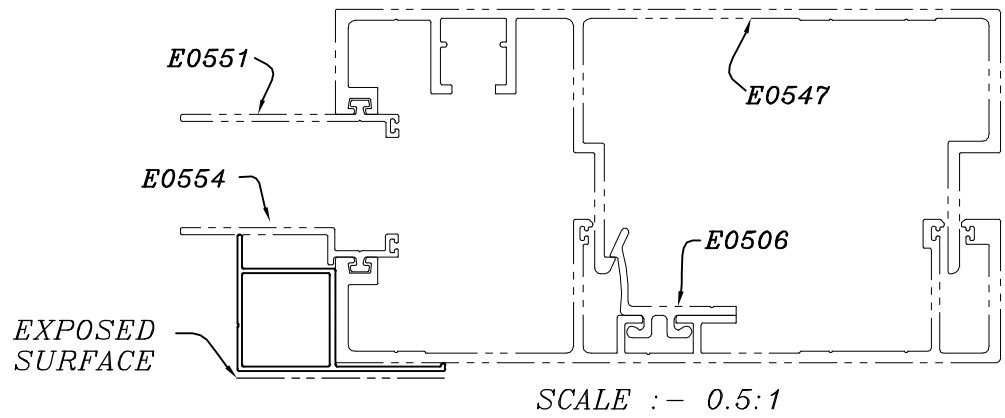

V = VEE GROOVE 0.3x90° (1 PLACE)

1. STRAIGHTNESS=1.0mm/M
2. TWIST=1.0mm/M
3. ANGULARITY= $\pm 1^\circ$
4. FLATNESS =0.007xWIDTH

UNSPECIFIED CORNERS RADIUS WILL BE 0.40 mm.



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	PARVESH	29-11-2016
CHECKED		
APPROVED	B. NATARAJA	03-11-2016
SCALE		1:1
AREA	mm ²	175.059
PERIMETER	mm.	182.106
WEIGHT	kg/m	0.473
DRAWING No.	SECTION No.	
P-16545	-	
E0550	E0550	

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm.
3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	ALUFIT (INDIA) PRIVATE LIMITED, BANGALORE
PARTY'S DRAWING No.	AS PER AUTOCAD DRAWING-AF-110(G2H)
ALLOY & TEMPER	6063 T6
DESCRIPTION	CURTAIN WALL SECTION-SPANDREL ADAPTOR