
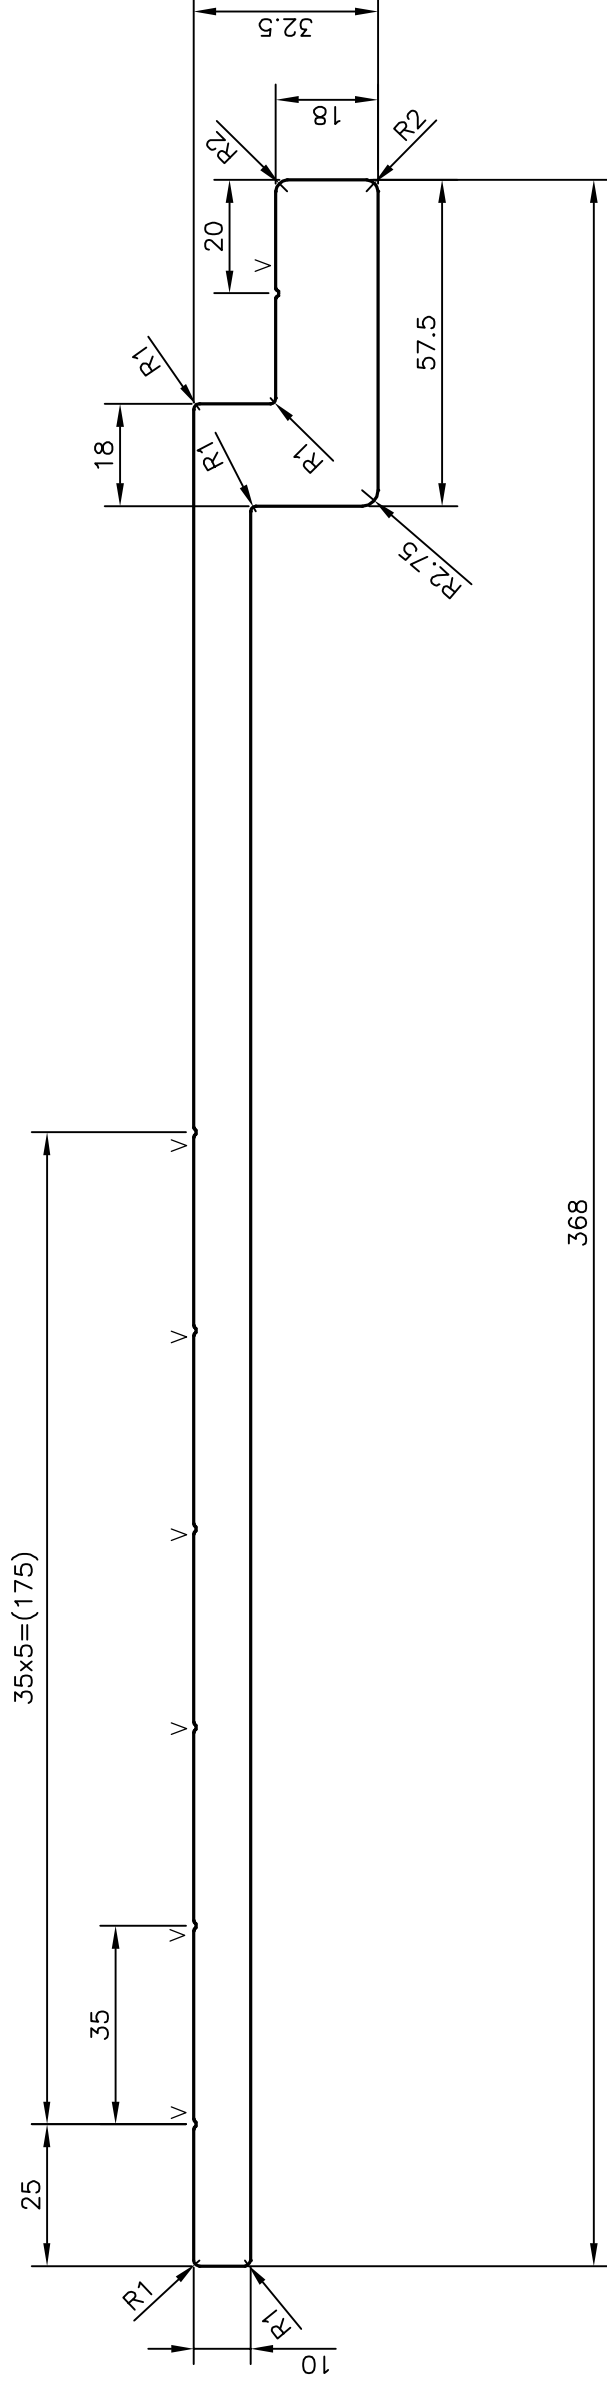



P-17658-1

E0777



V = V GROOVE 0.5x90° (7 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	1. STRAIGHTNESS=1.0mm/M
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	2. TWIST=1.0mm/M
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	3. ANGULARITY= ±1°
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	4. FLATNESS =0.007xWIDTH
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME

ALUFIT (INDIA) PRIVATE LIMITED, BANGALORE

PARTY'S DRAWING No.

AS PER AUTOCAD DRAWING-ALU-SKY-01

ALLOY & TEMPER

6005 T5

DESCRIPTION

CATWALK BRACKET-1

DRAWN J.P.KAUSHIK 29-11-2017

CHECKED

APPROVED B.NATARAJA 02-12-2017

SCALE 0.75:1

AREA mm² 4394.273

PERIMETER mm. 798.314

WEIGHT kg/m 11.865

DRAWING No. SECTION No.

P-17658-1 -

E0777 E0777