
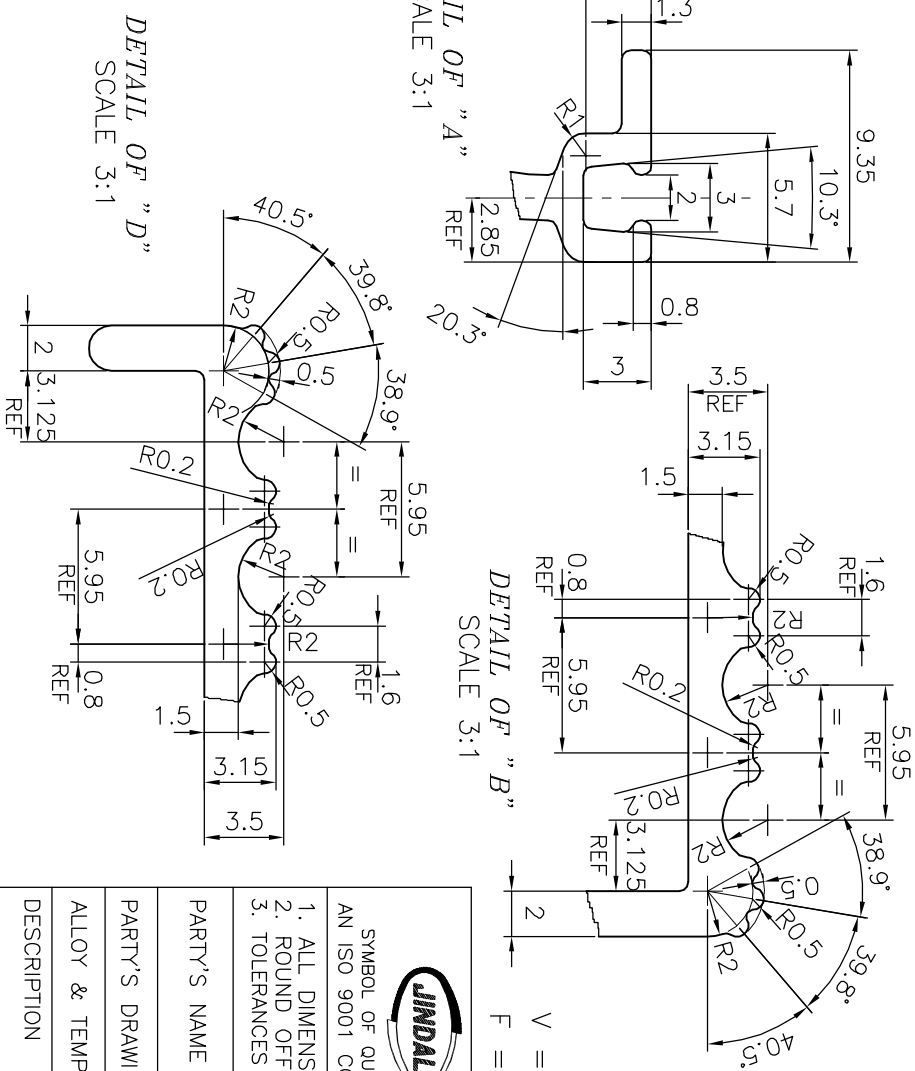
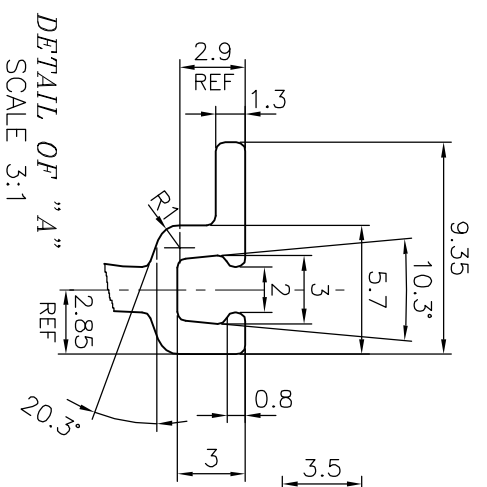
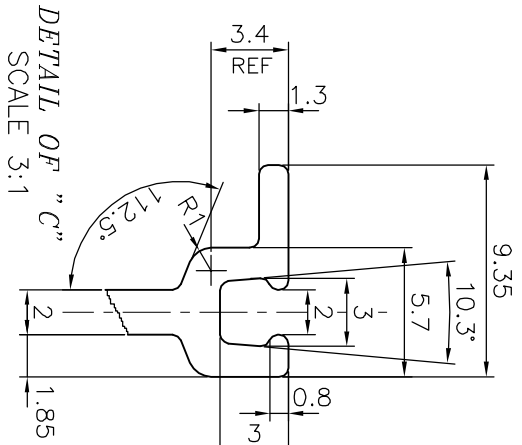
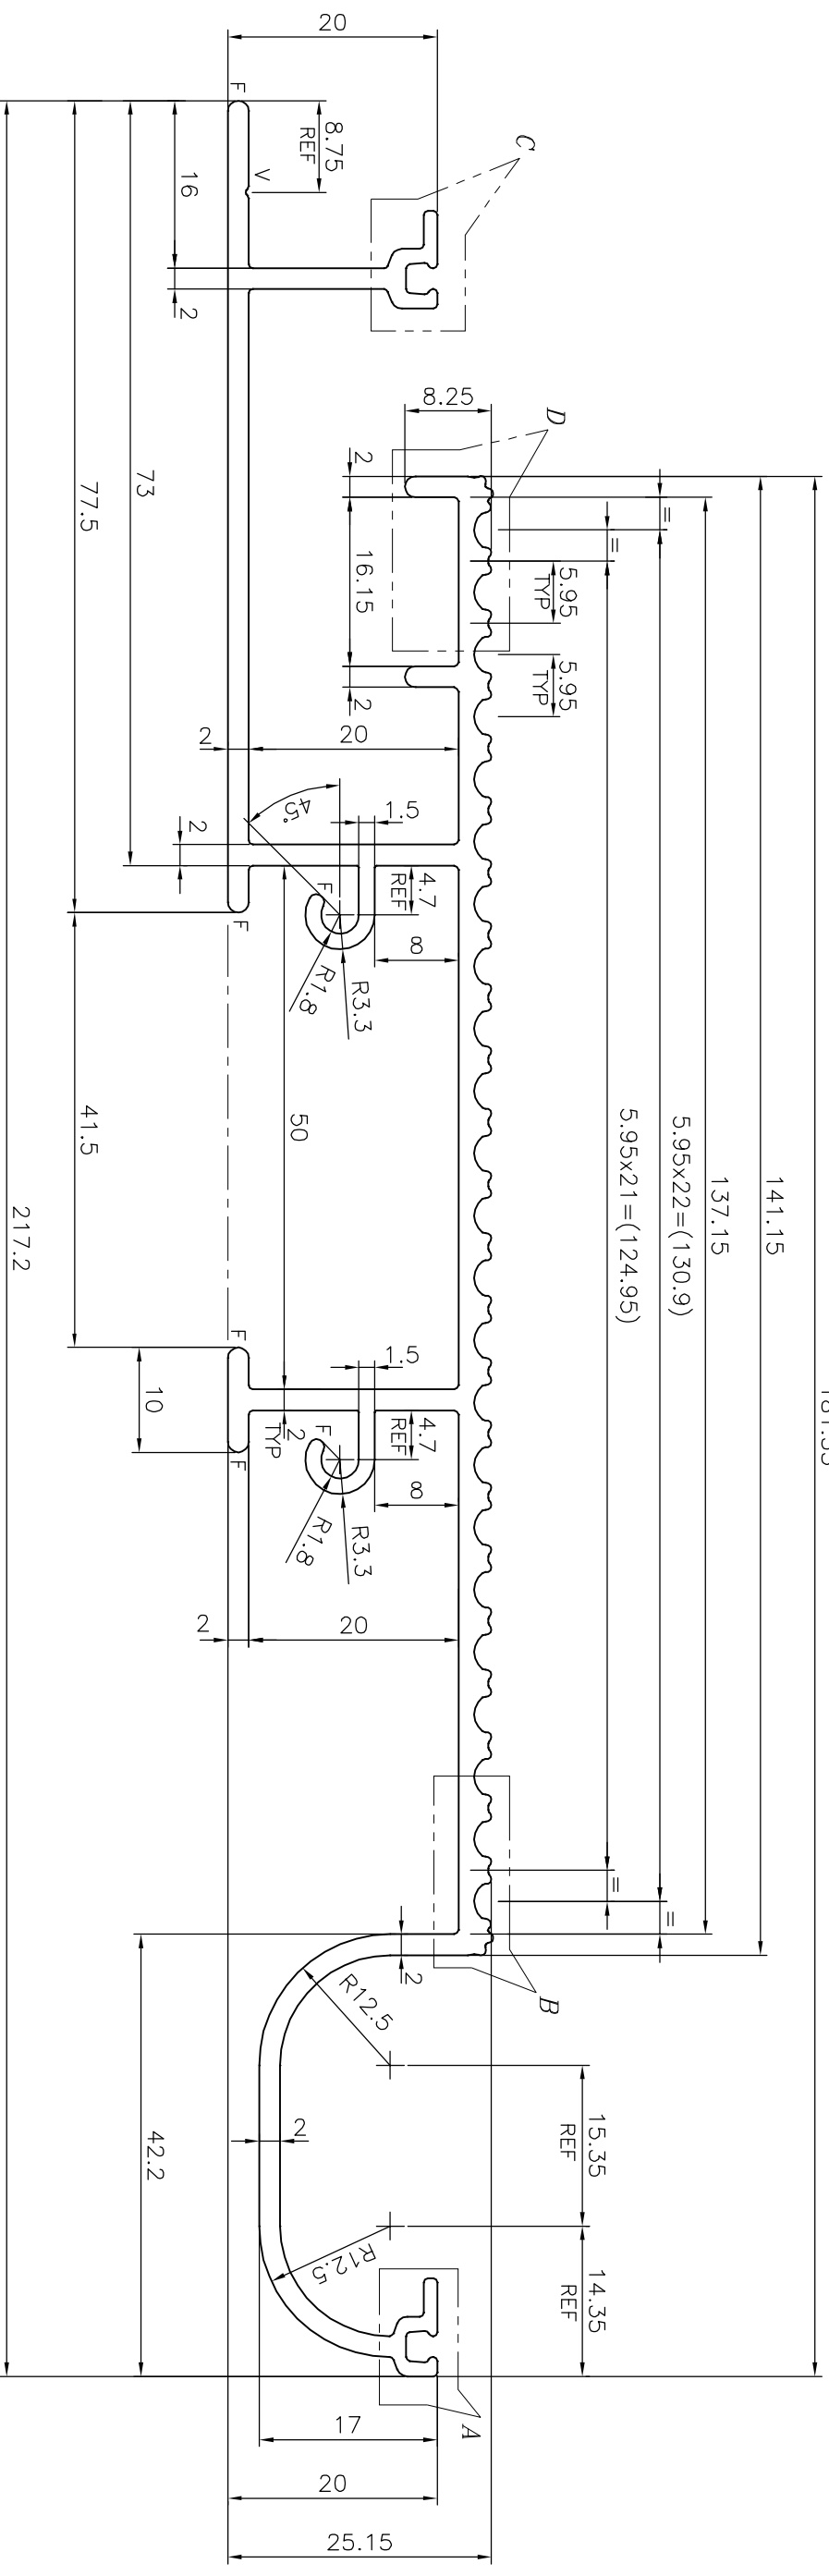


P-20138-1

E1188

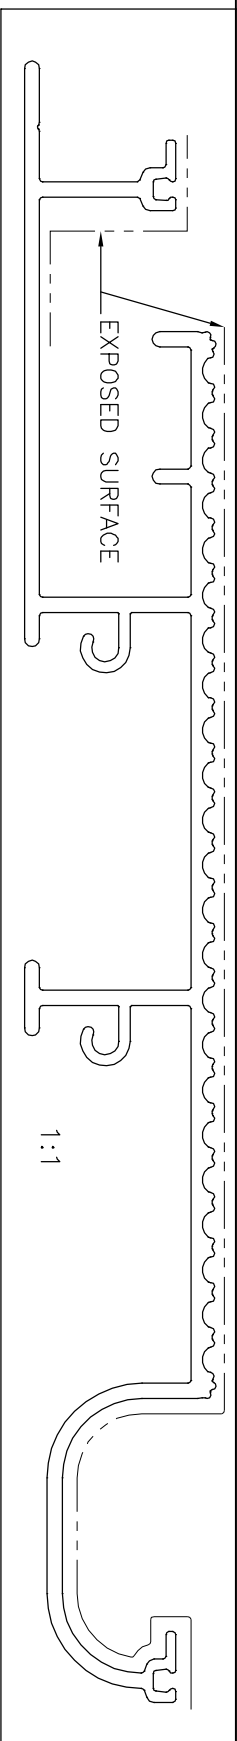

V = V GROOVE 0.3x90° (1 PLACE)
F = FULL RADIUS (6 PLACES)

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE			
CD ≤ 100	100 < CD ≤ 200	200 < CD ≤ 300	300 < CD ≤ 500
UP TO 10mm	±0.25	±0.35	±0.40
10.0 - 25.0	±0.30	±0.50	±0.60
25.0 - 50.0	±0.50	±0.80	±0.90
50.0 - 100.0	±0.70	±1.10	±1.30
100 - 150	-	±1.30	±1.50
150 - 200	-	±1.50	±1.80
200 - 300	-	±1.70	±2.10
300 - 450	-	-	±2.80

JINDAL
SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	CLEAR AMBER GROUP, UK	DRAWN	J.P. KAUSHIK	DATE	14-09-2019
PARTY'S DRAWING No.	CA EXTRUSION 048 REV. V2.01	CHECKED		APPROVED	B. NATARAJA
ALLOY & TEMPER	6063 T6	SCALE	1.5:1	AREA	829.892
DESCRIPTION	MISC. SECTION	PERIMETER	855.644	WEIGHT	2.241
		DRAWING No.	P-20138-1	SECTION No.	-
			E1188		E1188