


P-21611

E1399

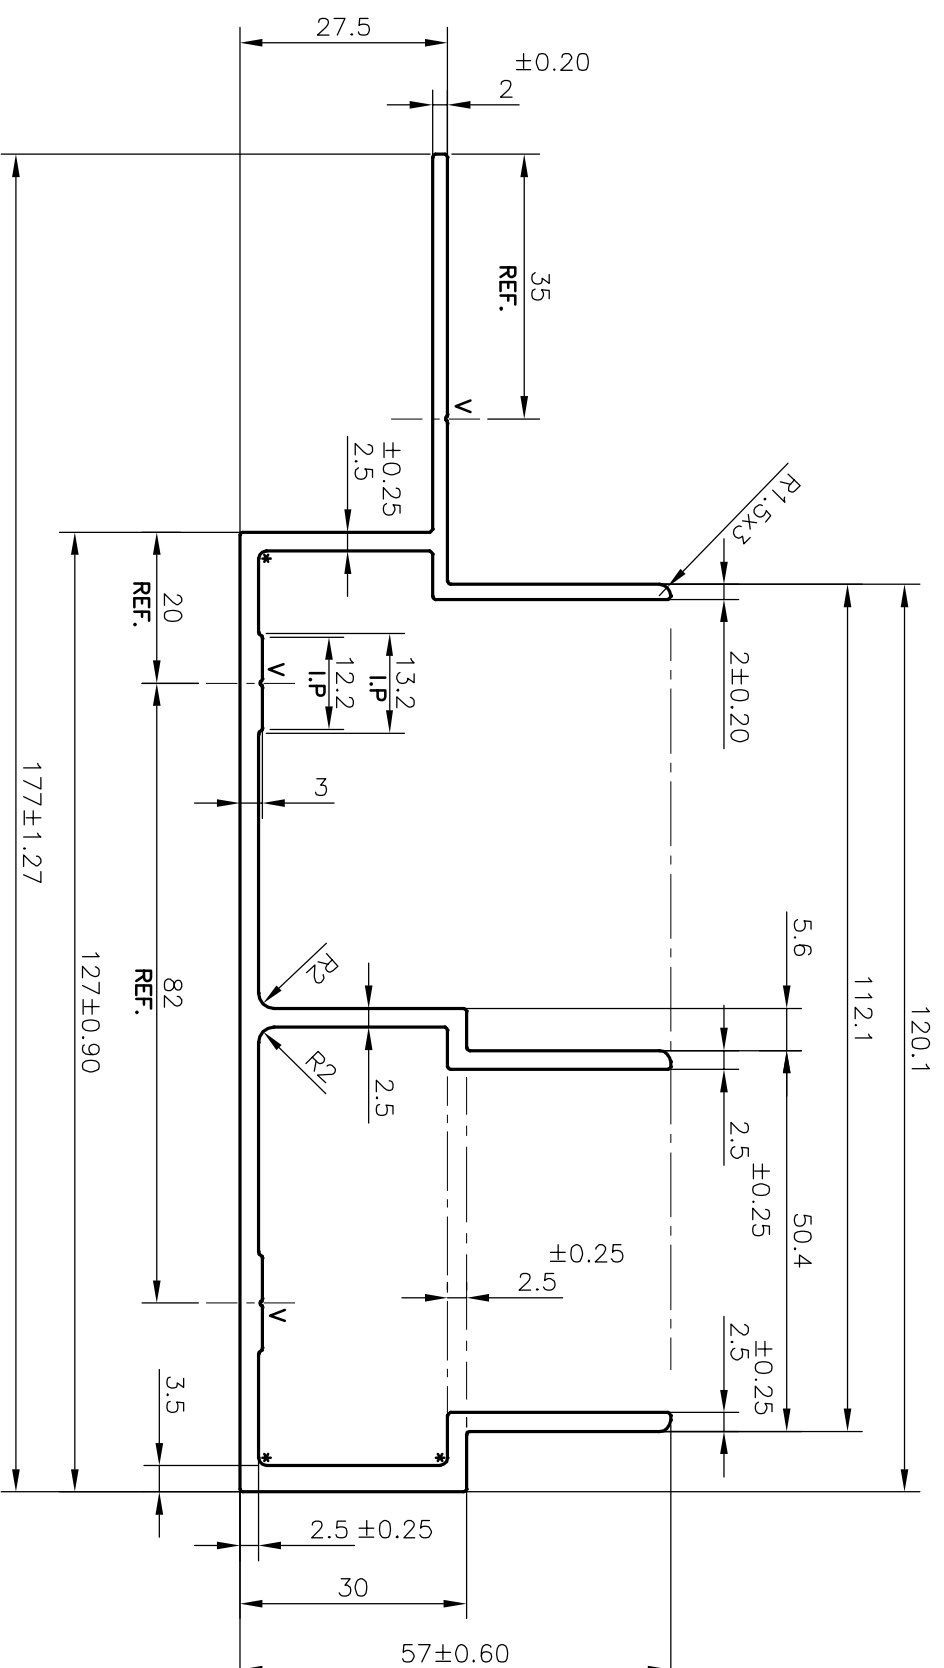

WEIGHT RANGE (kg/m) - 2.178 - 2.662 (APPROX.)

V="V" GROOVE 0.3x90° (3 PLACES)
 * = 1mm RADIUS (3 PLACES)


FINISH:- POWDER COATING

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

| | | |
|---------------------|----------------------|----------------------|
| UPTO 6.40mm - ±0.20 | UPTO 32.0mm - ±0.38 | UPTO 120.0mm - ±0.85 |
| UPTO 10.0mm - ±0.23 | UPTO 50.0mm - ±0.46 | UPTO 160.0mm - ±1.02 |
| UPTO 12.0mm - ±0.25 | UPTO 60.0mm - ±0.53 | UPTO 200.0mm - ±1.14 |
| UPTO 16.0mm - ±0.28 | UPTO 80.0mm - ±0.69 | UPTO 250.0mm - ±1.40 |
| UPTO 25.0mm - ±0.30 | UPTO 100.0mm - ±0.75 | UPTO 300.0mm - ±1.65 |

1. STRAIGHTNESS=1.0mm/M
2. TWIST=1.0mm/M
3. ANGULARITY= ±1°
4. FLATNESS =0.007xWIDTH

SCALE: 1:1
 ASSEMBLY

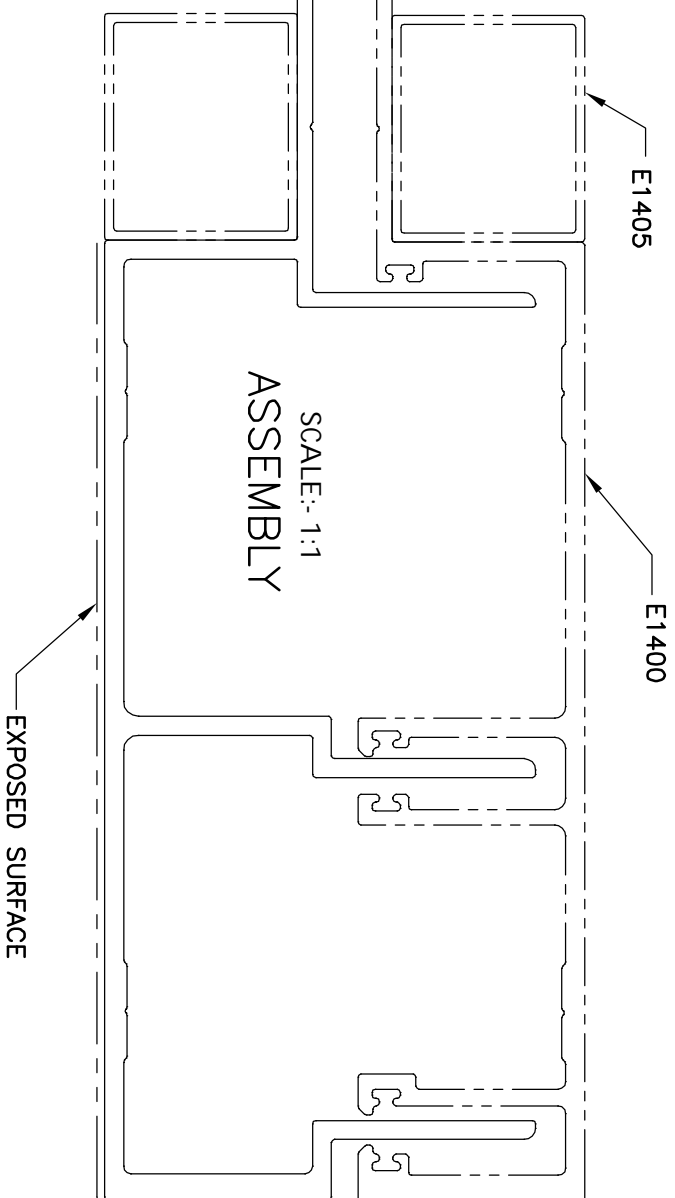

| | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|------------------------------------------|
| <p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p> | | SYMBOL OF QUALITY AN ISO 9001 COMPANY |
| 1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED | | |
| PARTY'S NAME | ALUFIT (INDIA) PVT. LTD., BANGALORE | |
| PARTY'S DRAWING No. | AS PER AutocAD DRAWING | |
| ALLOY & TEMPER | 6063 T6 | |
| DESCRIPTION | CURTAIN WALL SECTION | |
| DRAWN | NAME | DATE |
| CHECKED | DARPAN | 01-10-2020 |
| APPROVED | B.NATARAJA | 08-10-2020 |
| SCALE | 1:1 | |
| AREA | mm ² 896.203 | |
| PERIMETER | mm. 717.229 | |
| WEIGHT kg/m | 2.420 | |
| DRAWING No. | SECTION No. | |
| P-21611 | - | |
| E1399 | E1399 | |