
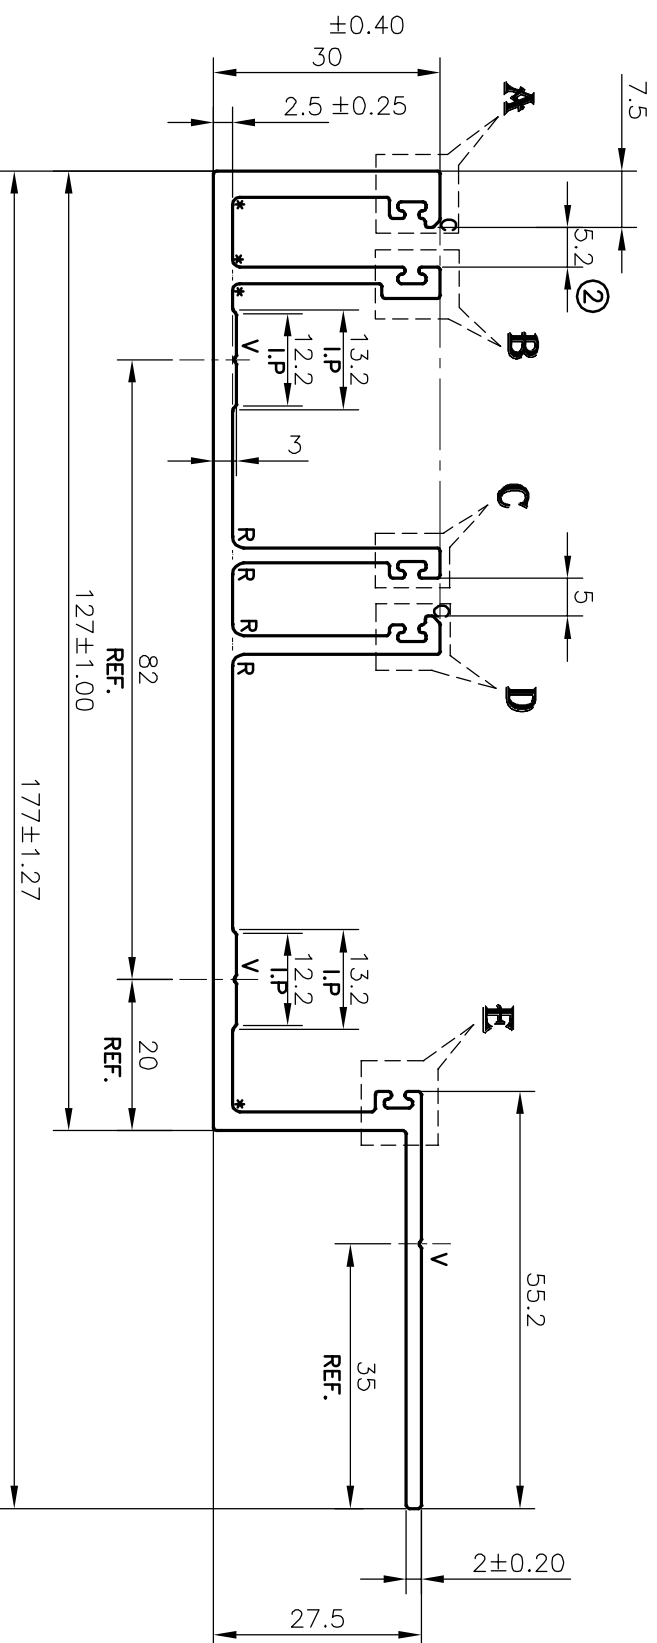
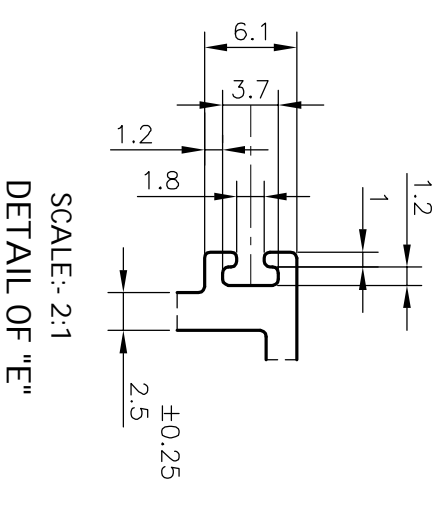
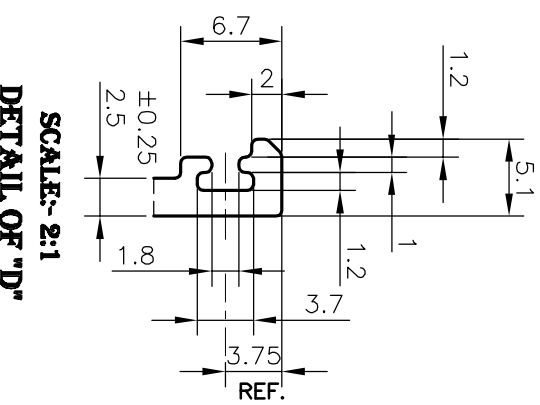
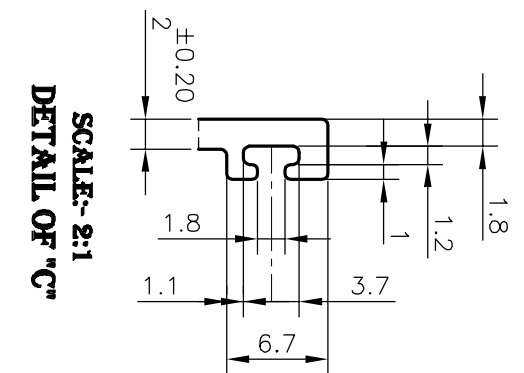
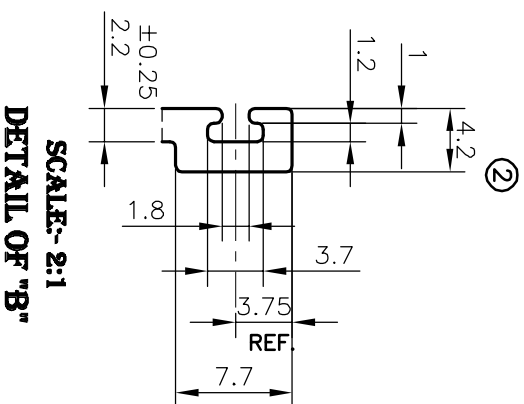


P-21612

E1400

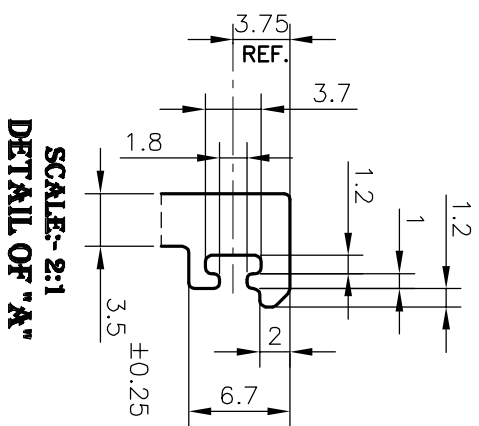

**WEIGHT RANGE (kg/m) - 2.000 - 2.444 (APPROX.)**

V = "V" GROOVE 0.3x90° (3 PLACES)  
 \* = 1mm RADIUS (4 PLACES)  
 R = 1.5mm RADIUS (4 PLACES)  
 C = 1x45° CHAMFER (2 PLACES)


**FINISH:- POWDER COATING**

(ISSUE-2) DIMENSION CHANGED FROM 4 TO 5.2 mm.  
 DIMENSION CHANGED FROM 5.4 TO 4.2 mm.

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65

1. STRAIGHTNESS=1.0mm/M
2. TWIST=1.0mm/M
3. ANGULARITY= ±1°
4. FLATNESS =0.007xWIDTH

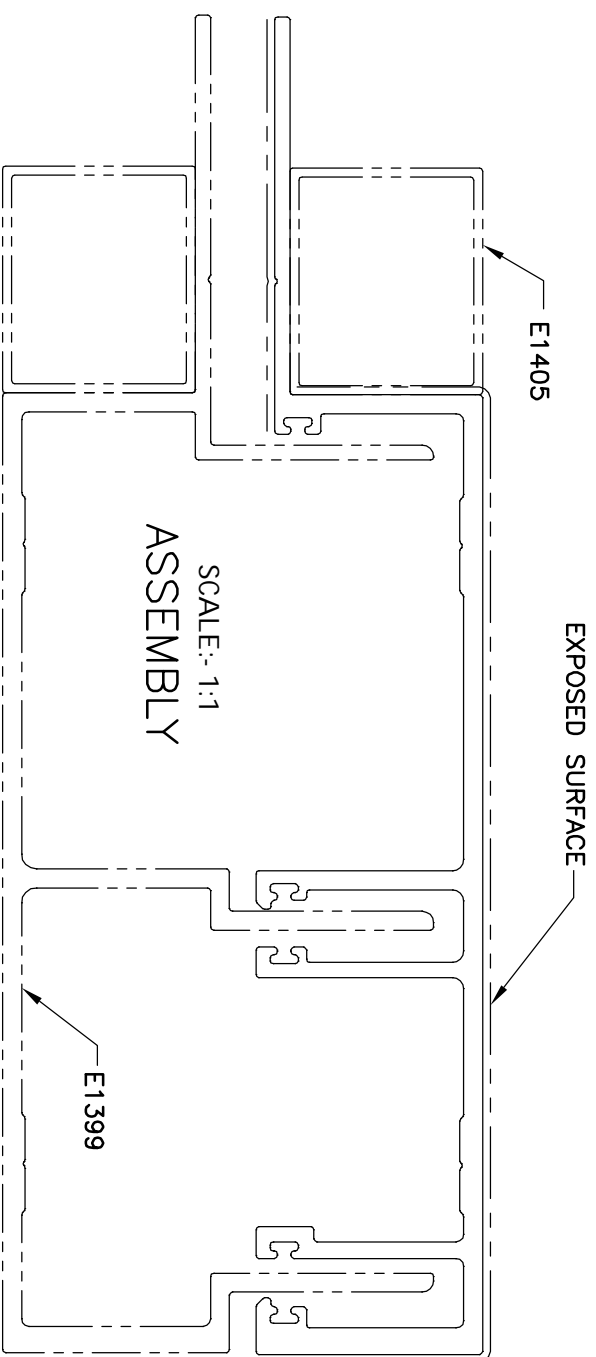

<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>		<p><b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)</p>	
<p>1. ALL DIMENSIONS ARE IN mm.                  2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.                  3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED</p>		<p>PARTY'S NAME ALUFIT (INDIA) PVT. LTD., BANGALORE</p>	
<p>PARTY'S DRAWING No. 6063 T6</p>		<p>AS PER AutocAD DRAWING</p>	
<p>ALLOY &amp; TEMPER</p>		<p>CURTAIN WALL SECTION</p>	
<p>DESCRIPTION</p>		<p>DRAWN NAME DATE DARPAN 13-11-2020</p>	
<p>SCALE: 1:1</p>		<p>CHECKED B.NATARAJA 16-11-2020</p>	
<p>AREA mm<sup>2</sup> 821.14</p>		<p>SCALE: 1:1</p>	
<p>PERIMETER mm. 680.992</p>		<p>APPROVED</p>	
<p>WEIGHT kg/m 2.217</p>		<p>SCALE: 1:1</p>	
<p>DRAWING No. P-21612</p>		<p>SECTION No.</p>	
<p>E1400</p>		<p>E1400-ISSUE-2</p>	