
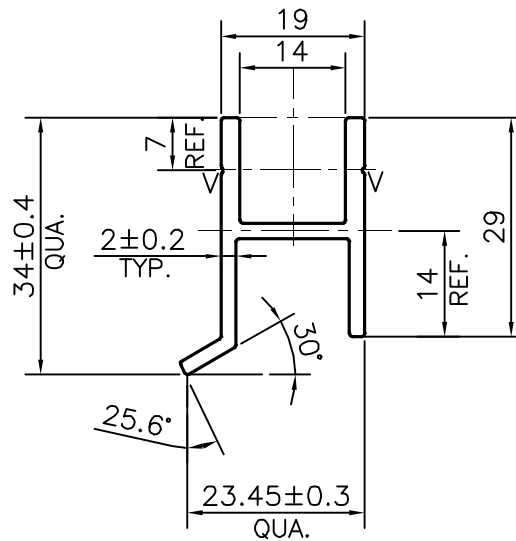


P-22726-2

E1640

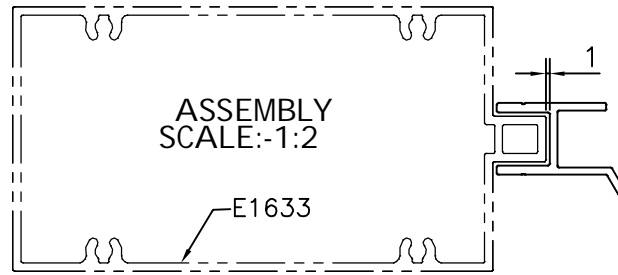

SCALE:-1:1


APPROXIMATE WEIGHT RANGE - 0.426 - 0.520 kg/m

FINISH:- POWDER COATING

V = V GROOVE 0.3x90° (2 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	1. STRAIGHTNESS=1.0mm/M 2. TWIST=1.0mm/M 3. ANGULARITY= ±1° 4. FLATNESS =0.007xWIDTH
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	DRAWN	NAME	DATE
		CHECKED	PUNITH	21-09-2021
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED		APPROVED	B.NATARAJA	01-10-2021
		SCALE		1:1
PARTY'S NAME ALUFIT (INDIA) PVT. LTD., BANGALORE		AREA mm <sup>2</sup>		175.037
		PERIMETER mm.		163.742
PARTY'S DRAWING No. HP-DIE-12 AND REQUIREMENT		WEIGHT kg/m		0.473
		DRAWING No.	SECTION No.	
ALLOY & TEMPER 6063 T6		P-22726-2		-
		E1640		E1640
DESCRIPTION CURTAIN WALL SECTION				