

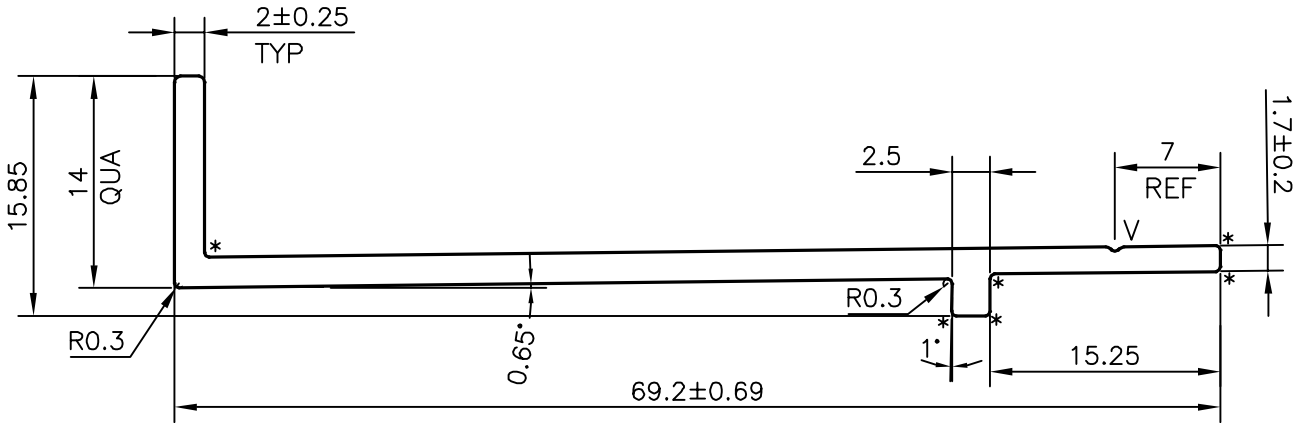


P-22729-2

E1643

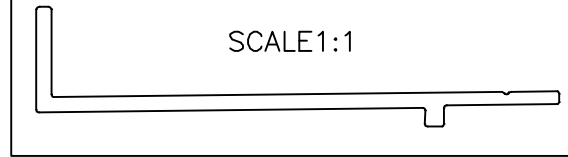

SCALE: - 2:1

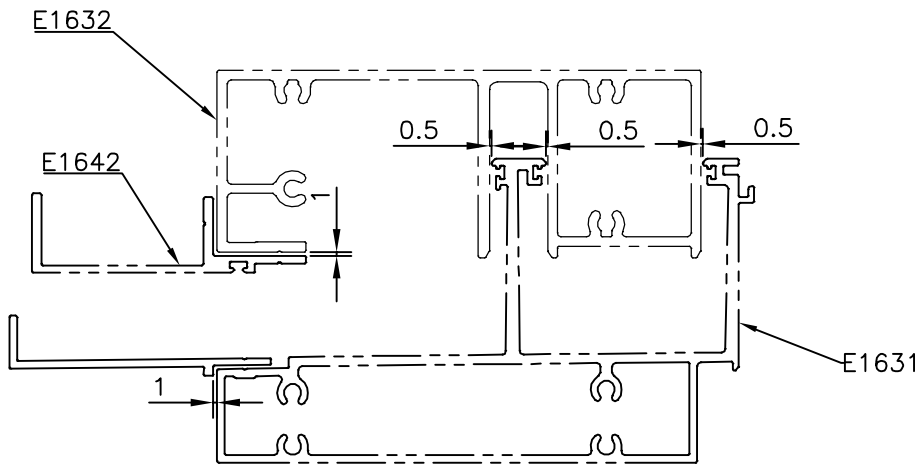

ASSEMBLY
SCALE 1:2

FINISH:- POWDER COATING

* = 0.30 RADIUS (6 PLACES)
V = V GROOVE 0.3x90° (1 PLACE)

APPROXIMATE WEIGHT RANGE - 0.387 - 0.497 kg/m

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	1. STRAIGHTNESS= 1.0mm/M 2. TWIST= 1.0mm/M 3. ANGULARITY= ±1° 4. FLATNESS =0.007xWIDTH
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	SONU	21-09-2021
CHECKED		
APPROVED	B.NATARAJA	01-10-2021
SCALE		2:1
AREA mm ²		163.859
PERIMETER mm.		170.116
WEIGHT kg/m		0.442
DRAWING No.	SECTION No.	
P-22729-2	-	
E1643	E1643	

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	ALUFIT (INDIA) PVT. LTD., BANGALORE
PARTY'S DRAWING No.	HP-DIE-15 & REQUIREMENT
ALLOY & TEMPER	6063 T6
DESCRIPTION	CURTAIN WALL - EDGE GUARD SECTION