


P-24257

G100322

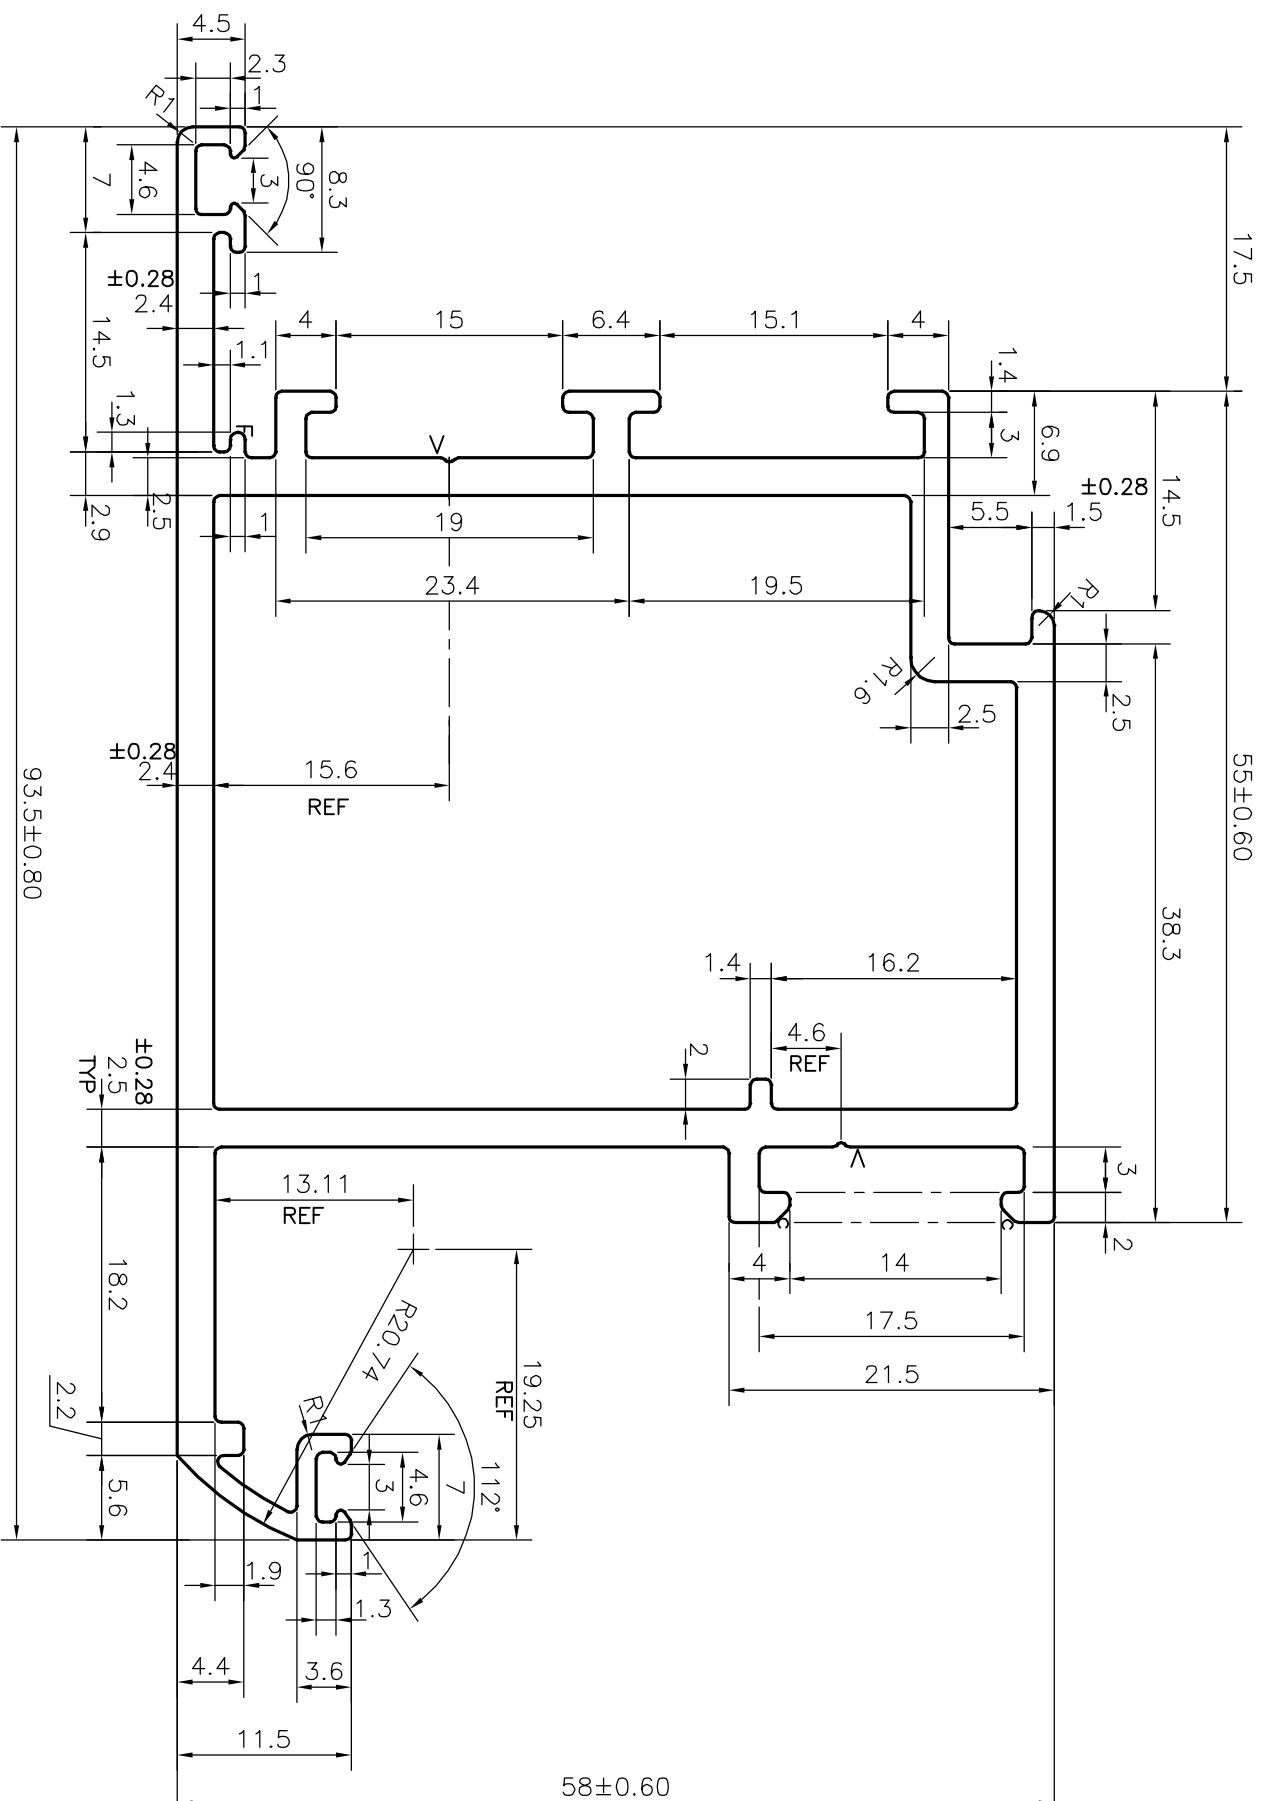

F= FULL RADIUS (1 PLACE)

C = CHAMFER 1x45° (2 PLACES)

V = V-GROOVE 0.3x90° (2PLACES)

1. STRAIGHTNESS=1.7mm/M

2. TWIST=1.7mm/W

3. ANGULARITY= ± 2 .

4. FLATNESS = $0.007 \times \text{WIDTH}$

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		NAME	DATE
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED		DRAWN	J.P.KAUSHIK	14-07-2022	
		CHECKED			
		APPROVED	B.NATARAJA	30-08-2022	
PARTY'S NAME	NKG INFRASTRUCTURE LTD., NEW DELHI	SCALE	2:1		
PARTY'S DRAWING No.	NKG-DW-02	AREA mm ²	698.574		
ALLOY & TEMPER	6063 T6	PERIMETER mm.	416.264		
DESCRIPTION	WINDOW SECTION(DOOR SHUTTER-01)	WEIGHT kg/m	1.886		
		DRAWING No.	SECTION No.		
		P-24257	7000000436		
		G100322	G100322		