



P-24261
G100326

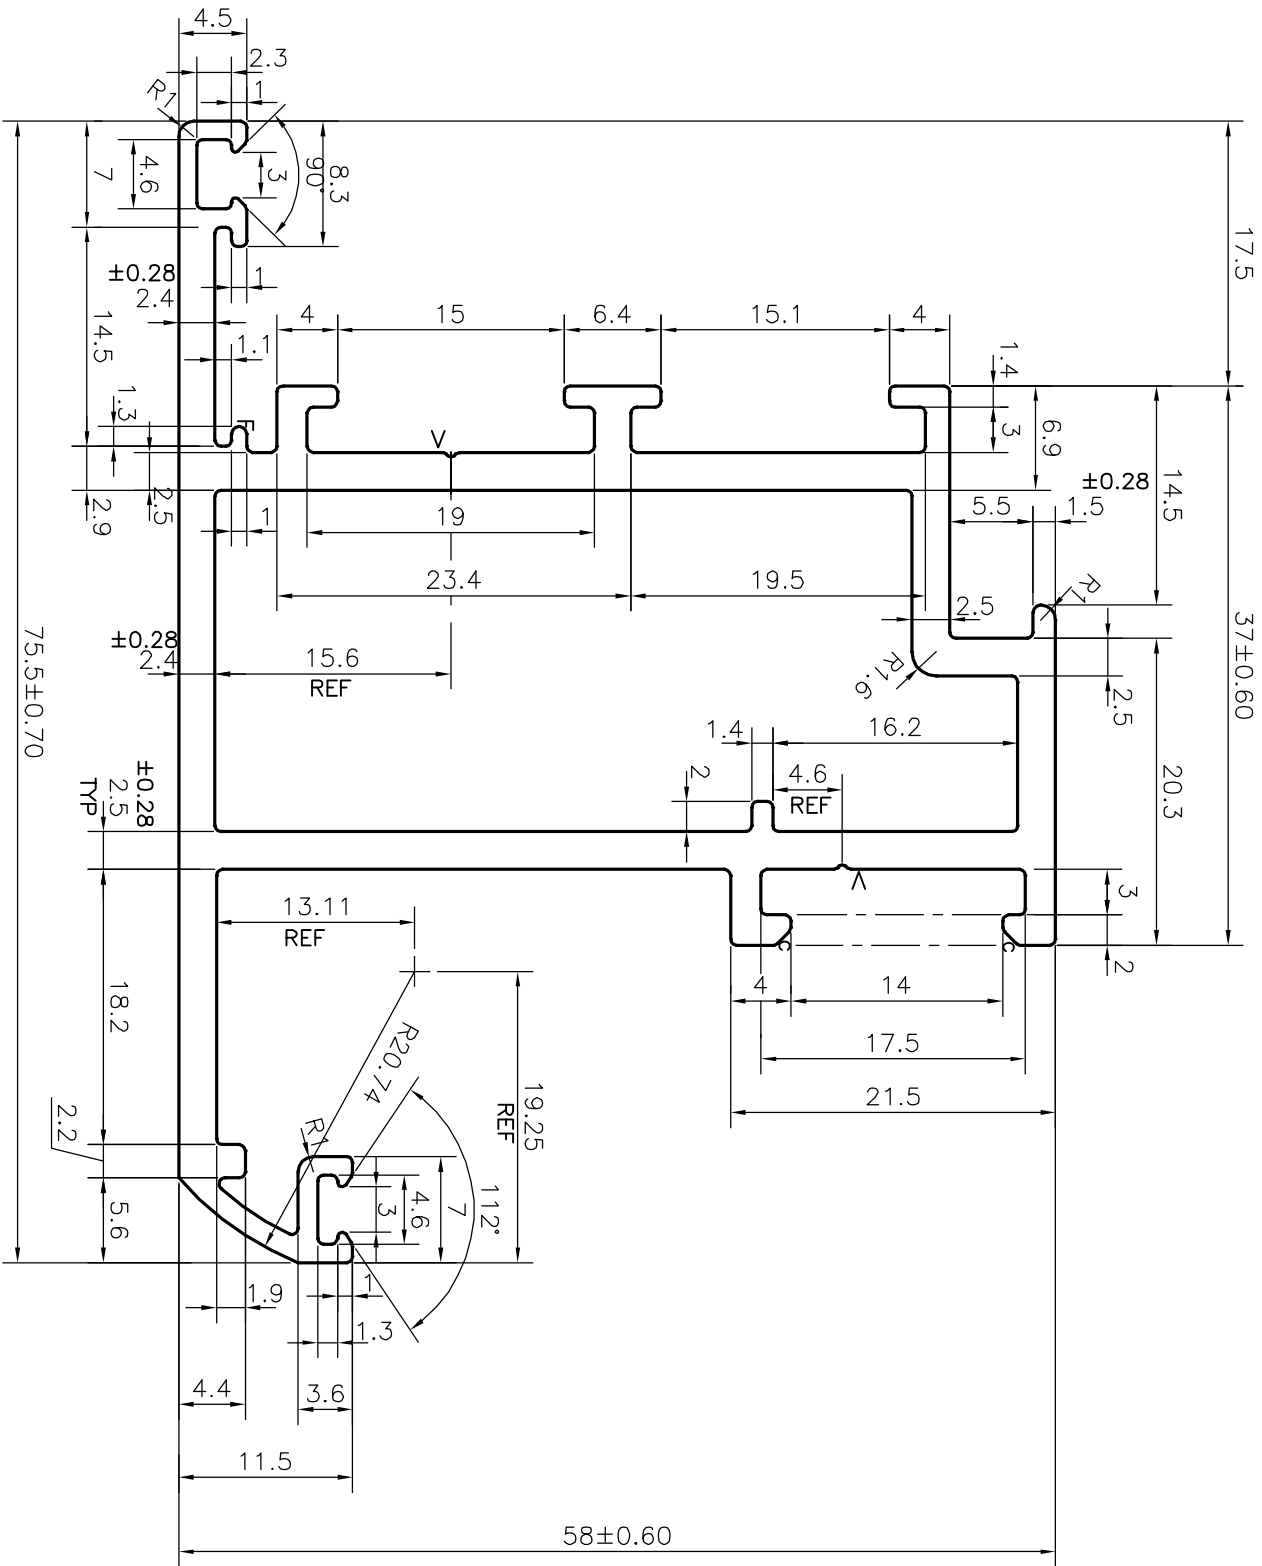

- F = FULL RADIUS (1 PLACE)
c = CHAMFER 1x45° (2 PLACES)
V = V-GROOVE 0.3x90° (2 PLACES)
1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.007xWIDTH

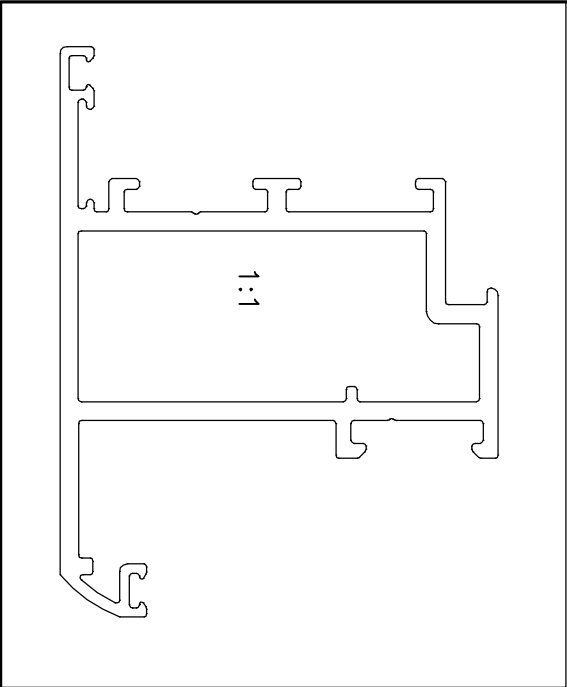

 SYMBOL OF QUALITY AN ISO 9001 COMPANY JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED
PARTY'S NAME	NKG INFRASTRUCTURE LTD., NEW DELHI	
PARTY'S DRAWING No.	NKG-DW-06	
ALLOY & TEMPER	6063 T6	
	PRODUCT CODE:-048	HSN CODE:-76042100
DESCRIPTION		WINDOW SECTION(WINDOW SHUTTER)
DRAWN	NAME	DATE
CHECKED	J.P.KAUSHIK	14-07-2022
APPROVED	B.NATARAJA	30-08-2022
SCALE		2:1
AREA		mm ² 610.374
PERIMETER		mm. 380.264
WEIGHT		kg/m 1.648
DRAWING No.		SECTION No.
P-24261		7000000440
G100326		G100326