P−24447
G100437

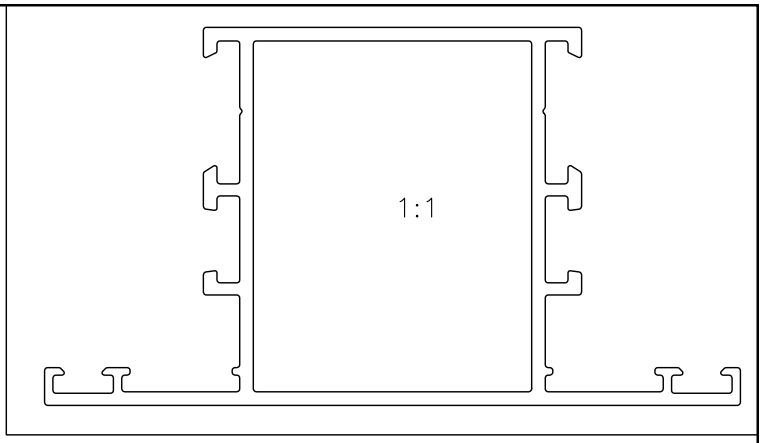

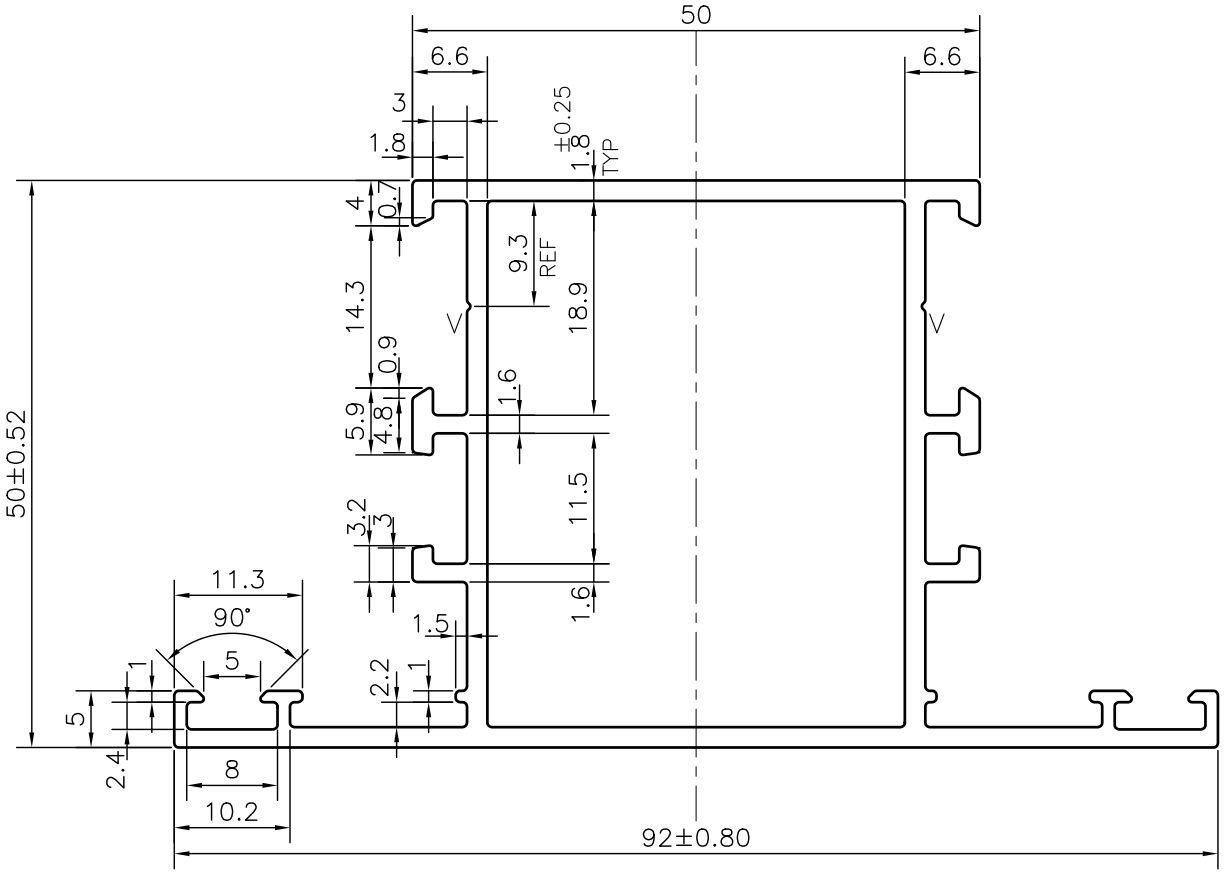

V = V GROOVE 0.3x90°(2 PLACES)

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.007xWIDTH

FINISH :−ANODIZING/POWDER COATING

JINDAL
SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.

BANGALORE−560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	10−09−2022
CHECKED		
APPROVED	B.NATARAJA	14−10−2022

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:6477−1983, UNLESS OTHERWISE SPECIFIED

SCALE	1.5:1
AREA mm^2	500.16
PERIMETER mm.	405.456
WEIGHT kg/m	1.350

PARTY'S NAME	KSV INFRABUILD, GREATERNOIDA
PARTY'S DRAWING No.	KSV/DRG−N/01
ALLOY & TEMPER	6063 T6 — PRODUCT CODE:−048 — HSN CODE:−76042100
DESCRIPTION	WINDOW SECTION

DRAWING No.	SECTION No.
P−24447	7000000552
G100437	G100437