
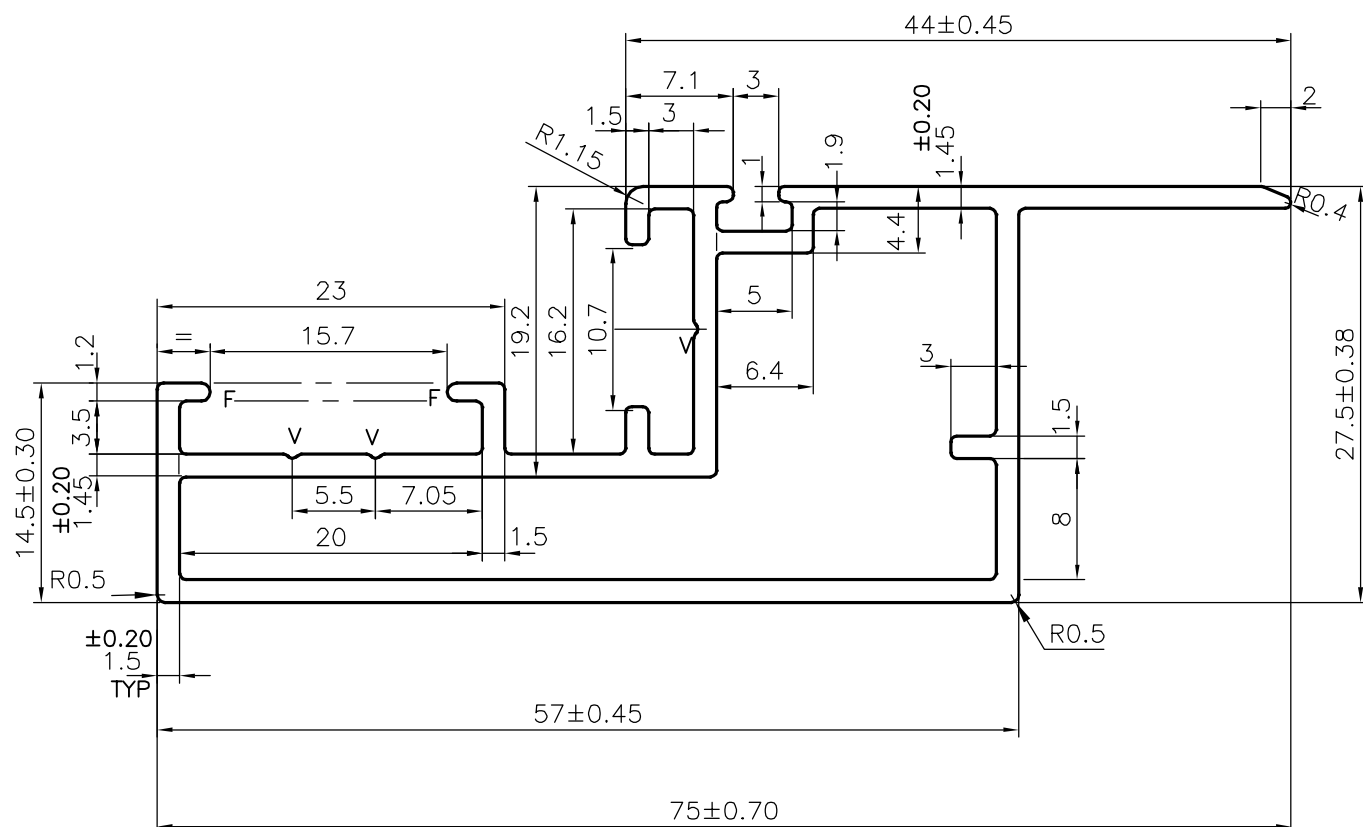


P-25682

G101265

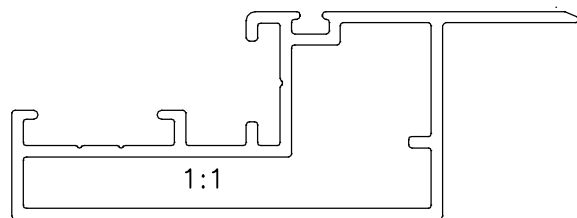

- F = FULL RADIUS (2 PLACES)
 V = V GROOVE 0.3x90°(3 PLACES)
1. STRAIGHTNESS=1.7mm/M
 2. TWIST=1.7mm/M
 3. ANGULARITY= $\pm 2^\circ$
 4. FLATNESS =0.007xWIDTH

FINISH :—POWDER COATING

CONTROLLED COPY

SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
 BANGALORE-560073 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER,IS:6477-1983 UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	KSV INFRABUILD, GREATER NOIDA		DRAWN	J.P.KAUSHIK	DATE	30-06-2023
PARTY'S DRAWING No.	DIE/KSV/DIEIOCL-N/D03R		CHECKED			
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-055	APPROVED	B.NATARAJA		19-08-2023
DESCRIPTION	CURTAIN WALL SECTION-SASH FRAME FOR 12 mm GLASS		SCALE			2:1
		HSN CODE:-76042100	AREA mm ²			312.888
			PERIMETER mm.			255.757
			WEIGHT kg/m			0.845
			DRAWING No.		SECTION No.	
			P-25682			7000001298
			G101265			G101265