



EXTRUSION THICKNESS LESS THAN 2mm WILL NOT BE ACCEPTED

CONTROLLED COPY

FINISH:- MILL

- *= RADIUS 0.30mm (11 PLACES)
- r = RADIUS 0.50mm (11 PLACES)
- R= RADIUS 1.0mm (33 PLACES)
- F = FULL RADIUS (1 PLACE)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

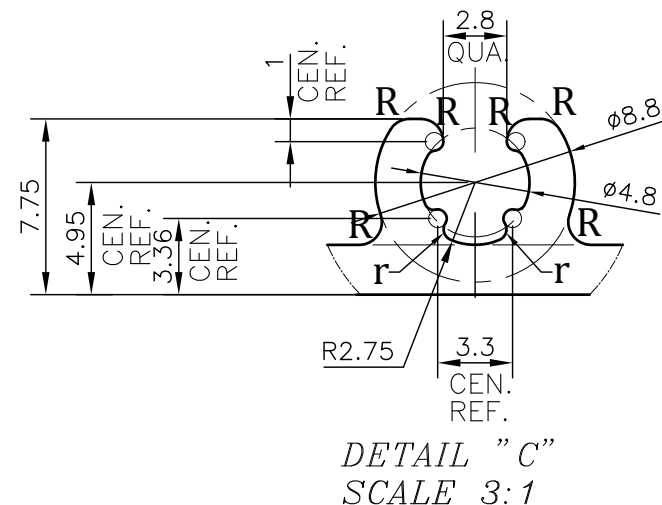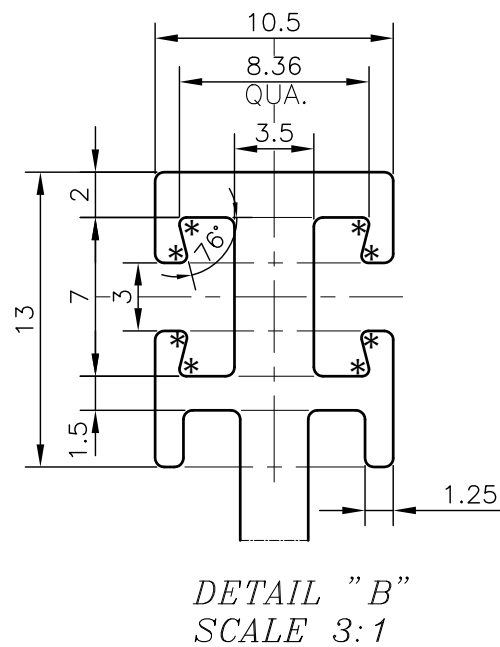

<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>	<p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p>	NAME	ADITYA N	DATE	01-09-2023
		CHECKED			
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED</p>		APPROVED	B.NATARAJA	07-10-2023	
		SCALE		1:1	
<p>PARTY'S NAME AASTHA ALUMINA (P) LIMITED., GURGAON.</p>		AREA	mm ²	1270.234	
		PERIMETER	mm.	674.636	
<p>PARTY'S DRAWING No. AS PER AUTOCAD DRAWING</p>		WEIGHT	kg/m	3.430	
		DRAWING No.		SECTION No.	
<p>ALLOY & TEMPER 6063 T6</p>		P-25875-1		7000001584	
		G101431		G101431	
<p>DESCRIPTION CURTAIN WALL SECTION</p>		PRODUCT CODE:-055			
		HSN CODE:-76042100			