


P-25958

G101442

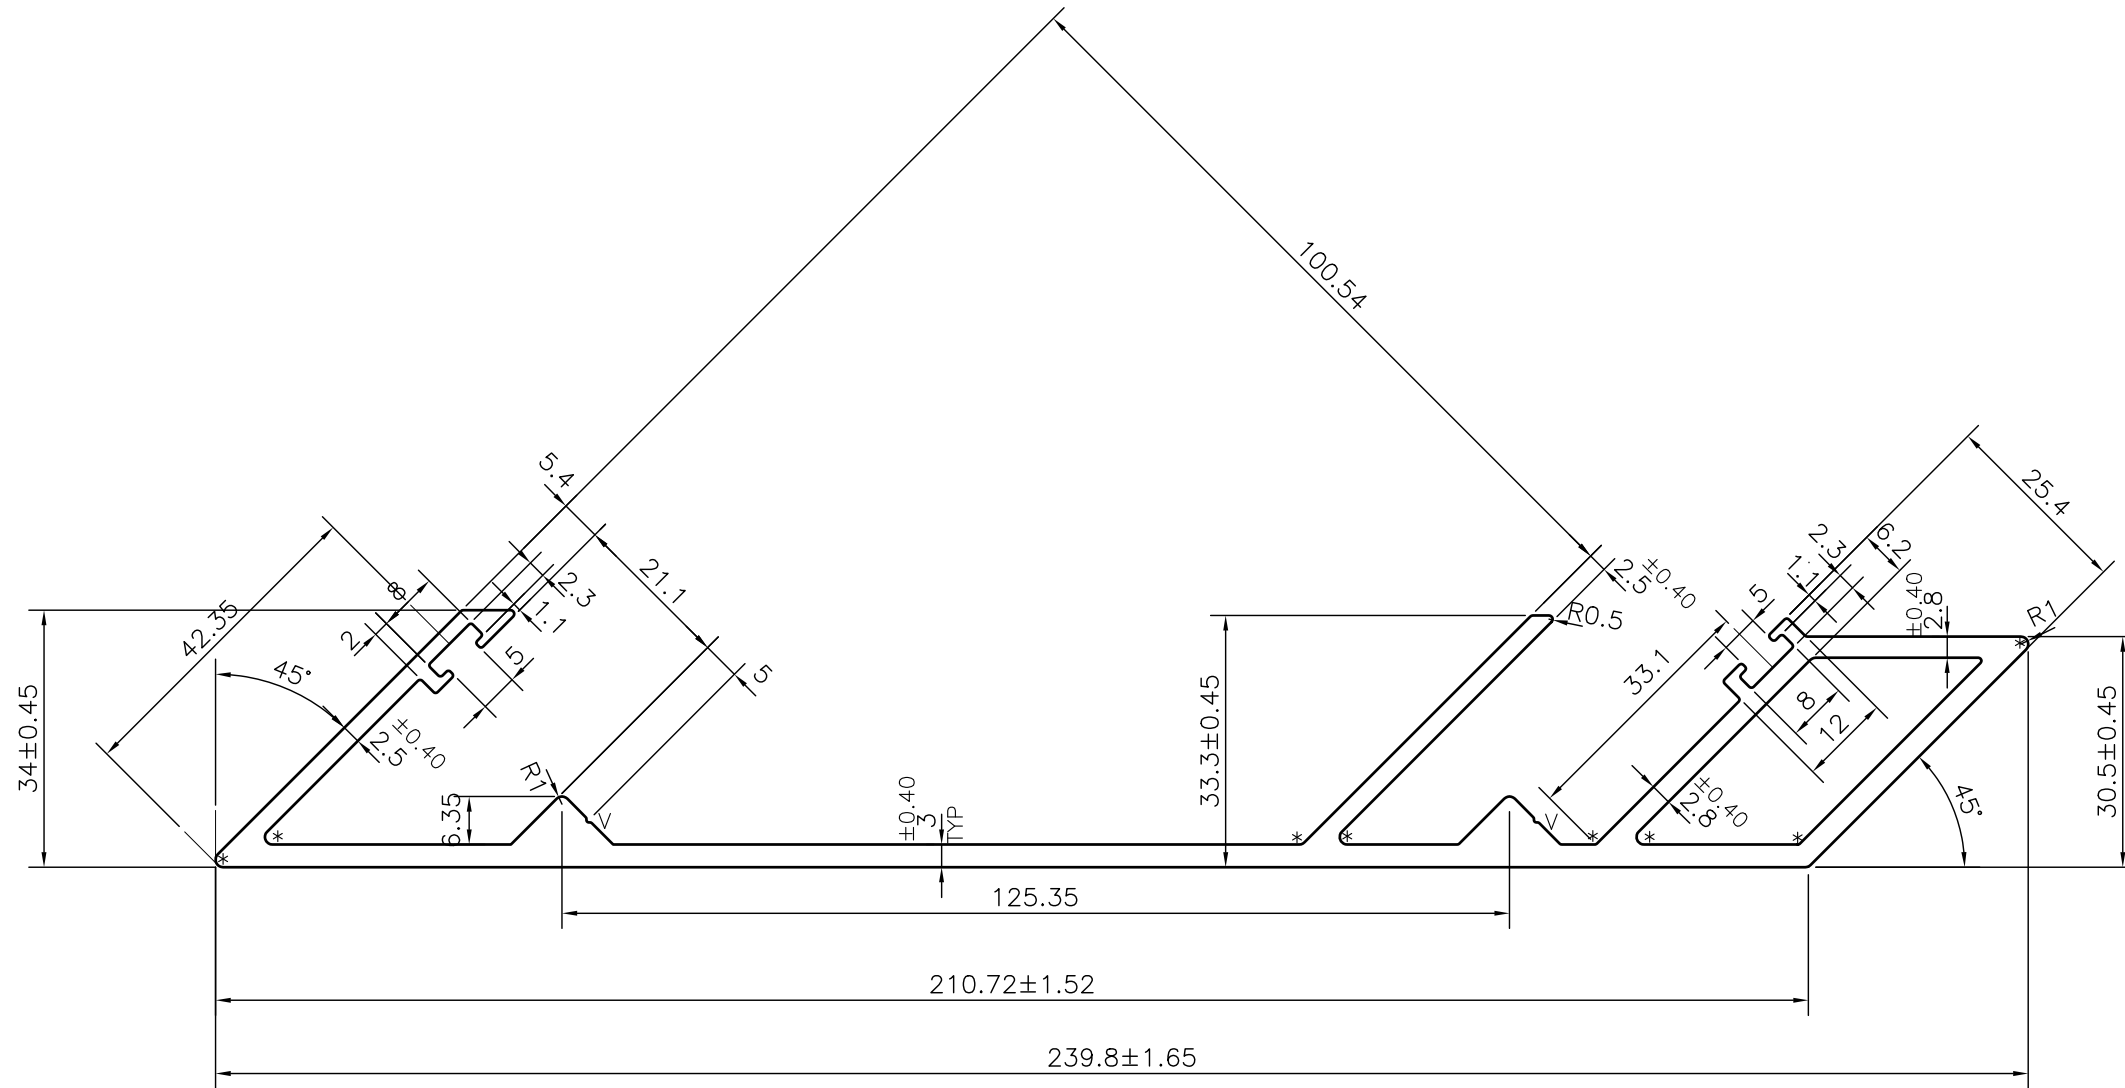


**EXTRUSION THICKNESS LESS THAN 2.0 mm
WILL NOT BE ACCEPTED.**


V = V GROOVE 0.3x90° (2 PLACES)

* = 1.0 RADIUS (8 PLACES)

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.007xWIDTH

CONTROLLED COPY

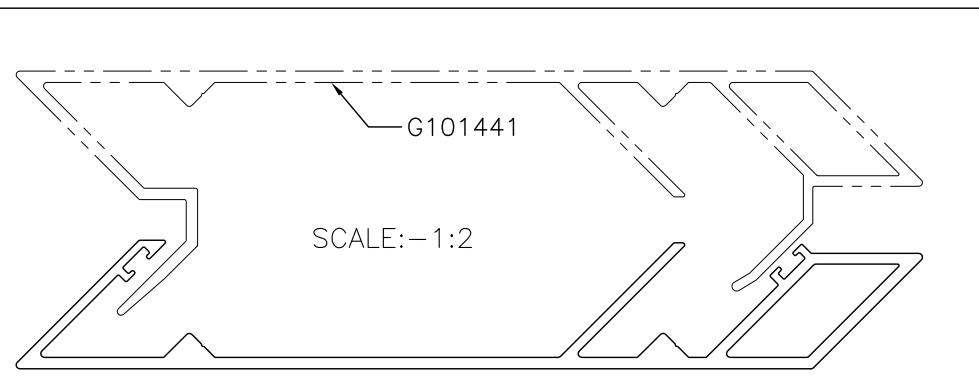

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		NAME	DATE
			DRAWN	J.P.KAUSHIK
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED			CHECKED	
			APPROVED	B.NATARAJA
PARTY'S NAME AASTHA ALUMINA PVT. LTD., NEW DELHI			SCALE	1:1
			AREA mm ²	1268.797
PARTY'S DRAWING No. AA-OCM-AL-18			PERIMETER mm.	720.9
			WEIGHT kg/m	3.426
ALLOY & TEMPER 6063 T6			DRAWING No.	SECTION No.
			P-25958	Q40468
DESCRIPTION CURTAIN WALL SECTION-OUTER CORNER FEMALE			G101442	G101442
			PRODUCT CODE:-056	
			HSN CODE:-76042100	