
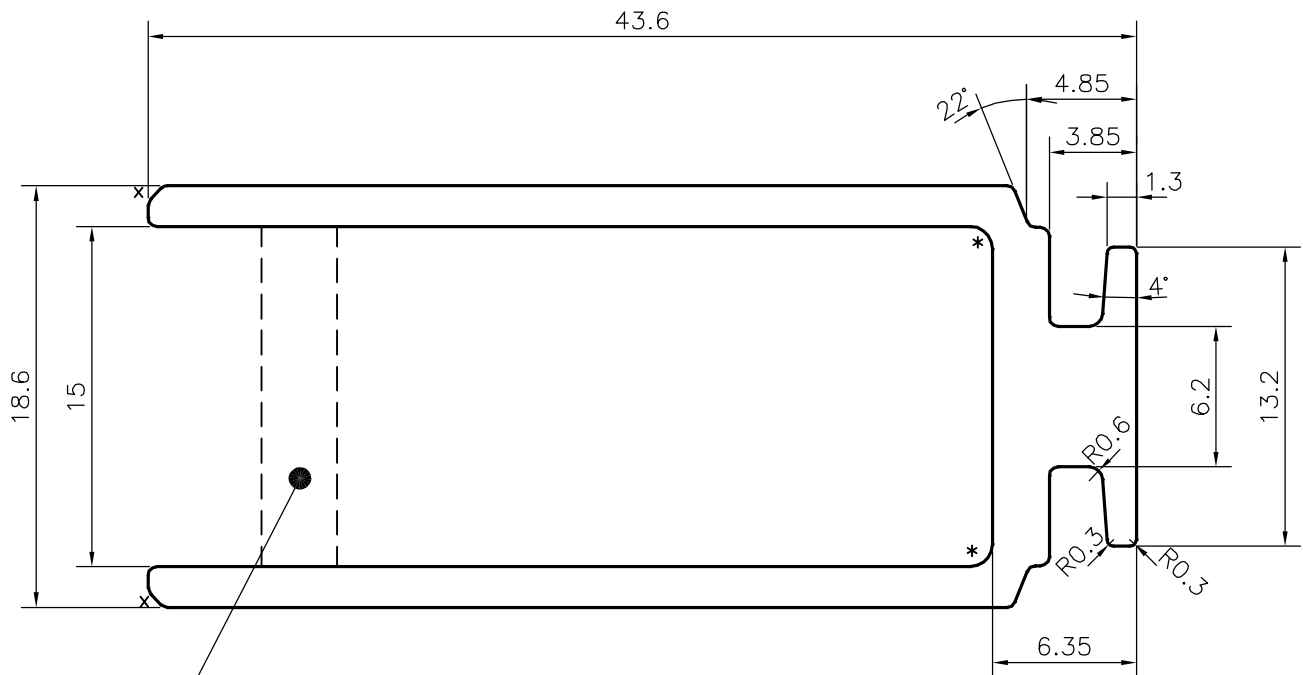


P-26781

G102021

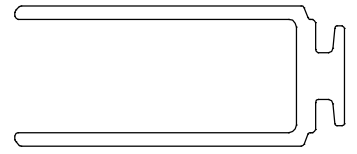

SEMI HOLLOW DESIGN A SMALL PROJECTION
MARK MAY APPEAR IN THIS PLACE.
DUE TO DESIGN CONSTRAIN

x = CHAMFER 0.7x45° (2 PLACES)

* = 1.0 RADIUS (2 PLACES)

1. STRAIGHTNESS=1.7mm/M

2. TWIST=1.7mm/M

3. ANGULARITY= $\pm 2^\circ$

4. FLATNESS =0.007xWIDTH

FINISH :-POWDER COATING

CONTROLLED COPY



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	31-01-2024
CHECKED		
APPROVED	B.NATARAJA	16-03-2024

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED

SCALE	3:1
AREA mm ²	209.591
PERIMETER mm.	207.291
WEIGHT kg/m	0.566

PARTY'S NAME	UNIGLAZE INDIA PVT. LTD., KOLAR		DRAWING No.	SECTION No.
PARTY'S DRAWING No.	AS PER DRAWING		P-26781	Q43164
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-055	G102021	G102021
		HSN CODE:-76042990		
DESCRIPTION	EDGE GUARD -MID SECTION			