


P-27038

G102064

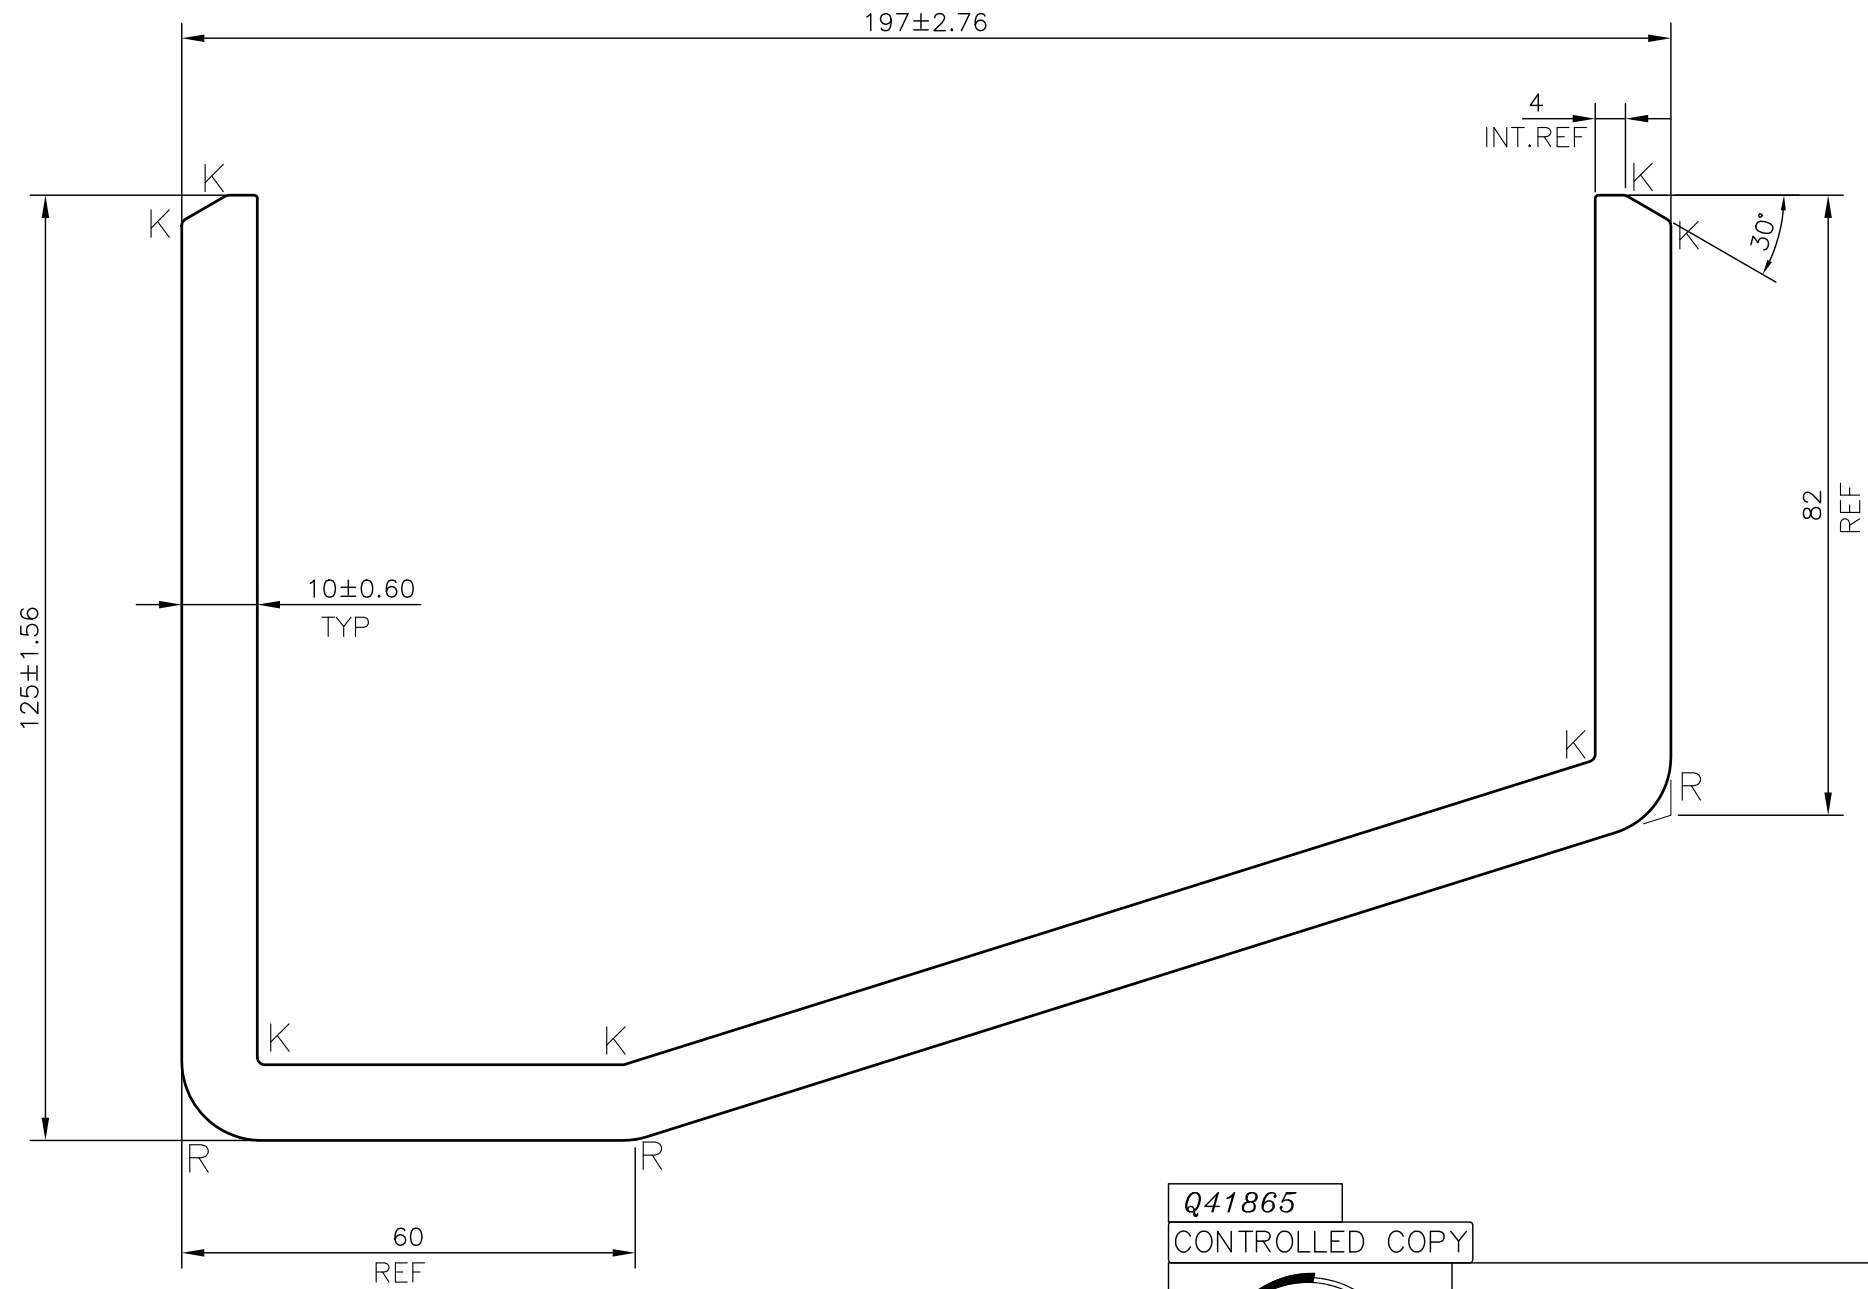


K = RADIUS 1.00mm (7 PLACES)  
R = RADIUS 10.5mm (3 PLACES)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY=  $\pm 2^\circ$
4. FLATNESS= 0.007 X Width

Q41865

CONTROLLED COPY

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)		NAME	DATE	
			DRAWN	SHRIPAD	12-03-2024
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS 3965:1981 , UNLESS OTHERWISE SPECIFIED			CHECKED	PARVESH	04-04-2024
			APPROVED	J.N.RAI	04-04-2024
			SCALE	1:1	
PARTY'S NAME NARAIN COOLING TECHNOLOGIES (P) LTD UTTAR PRADESH			AREA mm <sup>2</sup>	3861.578	
			PERIMETER mm.	790.49	
PARTY'S DRAWING No. AS PER SKETCH			WEIGHT kg/m	10.426	
			DRAWING No.	SECTION No.	
ALLOY & TEMPER 6063 T6			P-27038	7000002227	
			PRODUCT CODE:-085	G102064	
DESCRIPTION INDUSTRIAL SECTION			G102064	G102064	
			HSN CODE:-76042990		