


P-27039
G102065

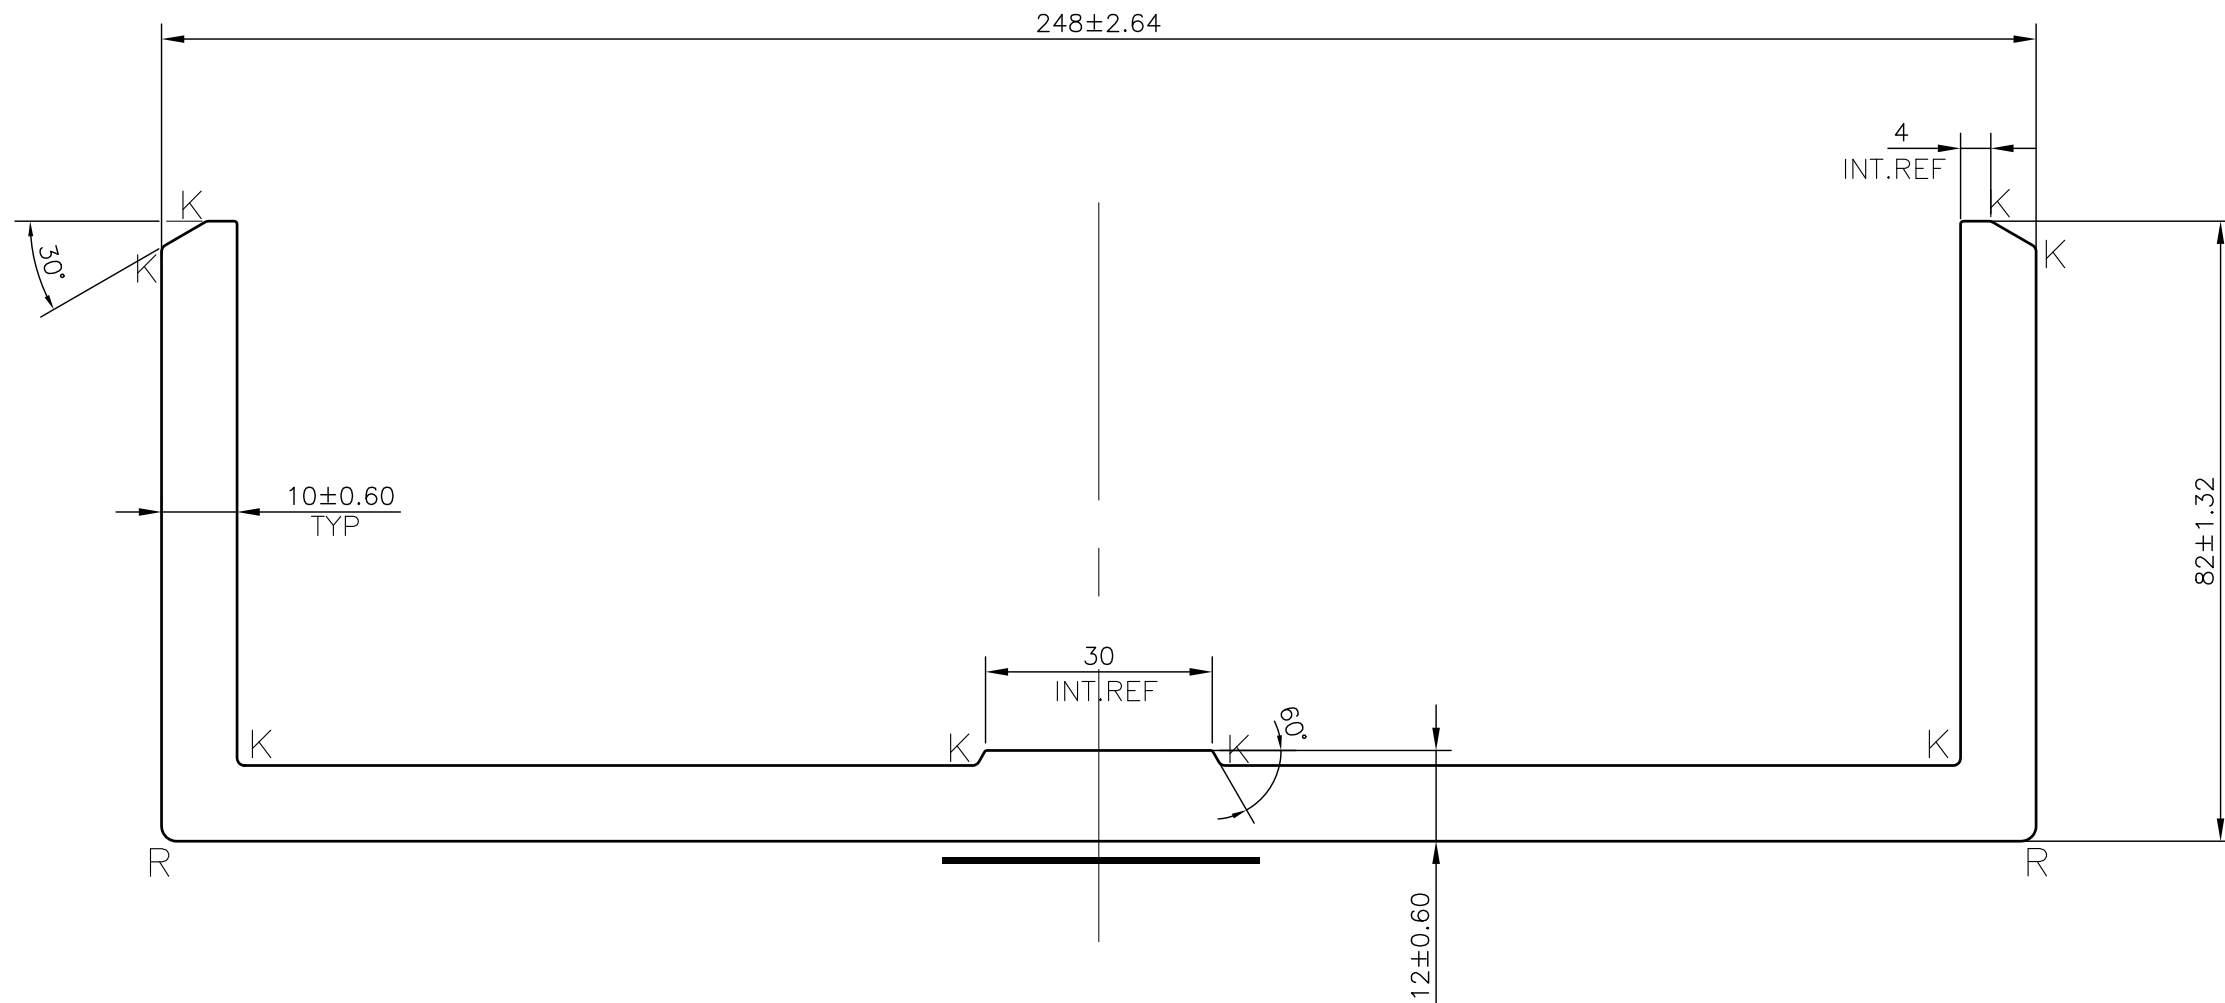


K = RADIUS 1.00mm (8 PLACES)
R = RADIUS 2.00mm (2 PLACES)

PLEASE NOTE:-
— DUE TO THICKNESS VARIATION IMPRESSION MARK MAY APPEAR IN THIS MARKED PORTION.

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007 X Width

Q41866

CONTROLLED COPY

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		NAME	DATE
	1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS 3965:1981 , UNLESS OTHERWISE SPECIFIED		DRAWN	SHRIPAD 12-03-2024
PARTY'S NAME	NARAIN COOLING TECHNOLOGIES (P) LTD UTTAR PRADESH		CHECKED	PARVESH 04-04-2024
PARTY'S DRAWING No.	AS PER SKETCH		APPROVED	J.N.RAI 04-04-2024
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-085 HSN CODE:-76042990	SCALE	1:1
DESCRIPTION	INDUSTRIAL SECTION		AREA mm ²	3960.139
			PERIMETER mm.	797.78
			WEIGHT kg/m	10.692
			DRAWING No.	SECTION No.
			P-27039	7000002228
			G102065	G102065