


P-JAL-B-547-1

G102304

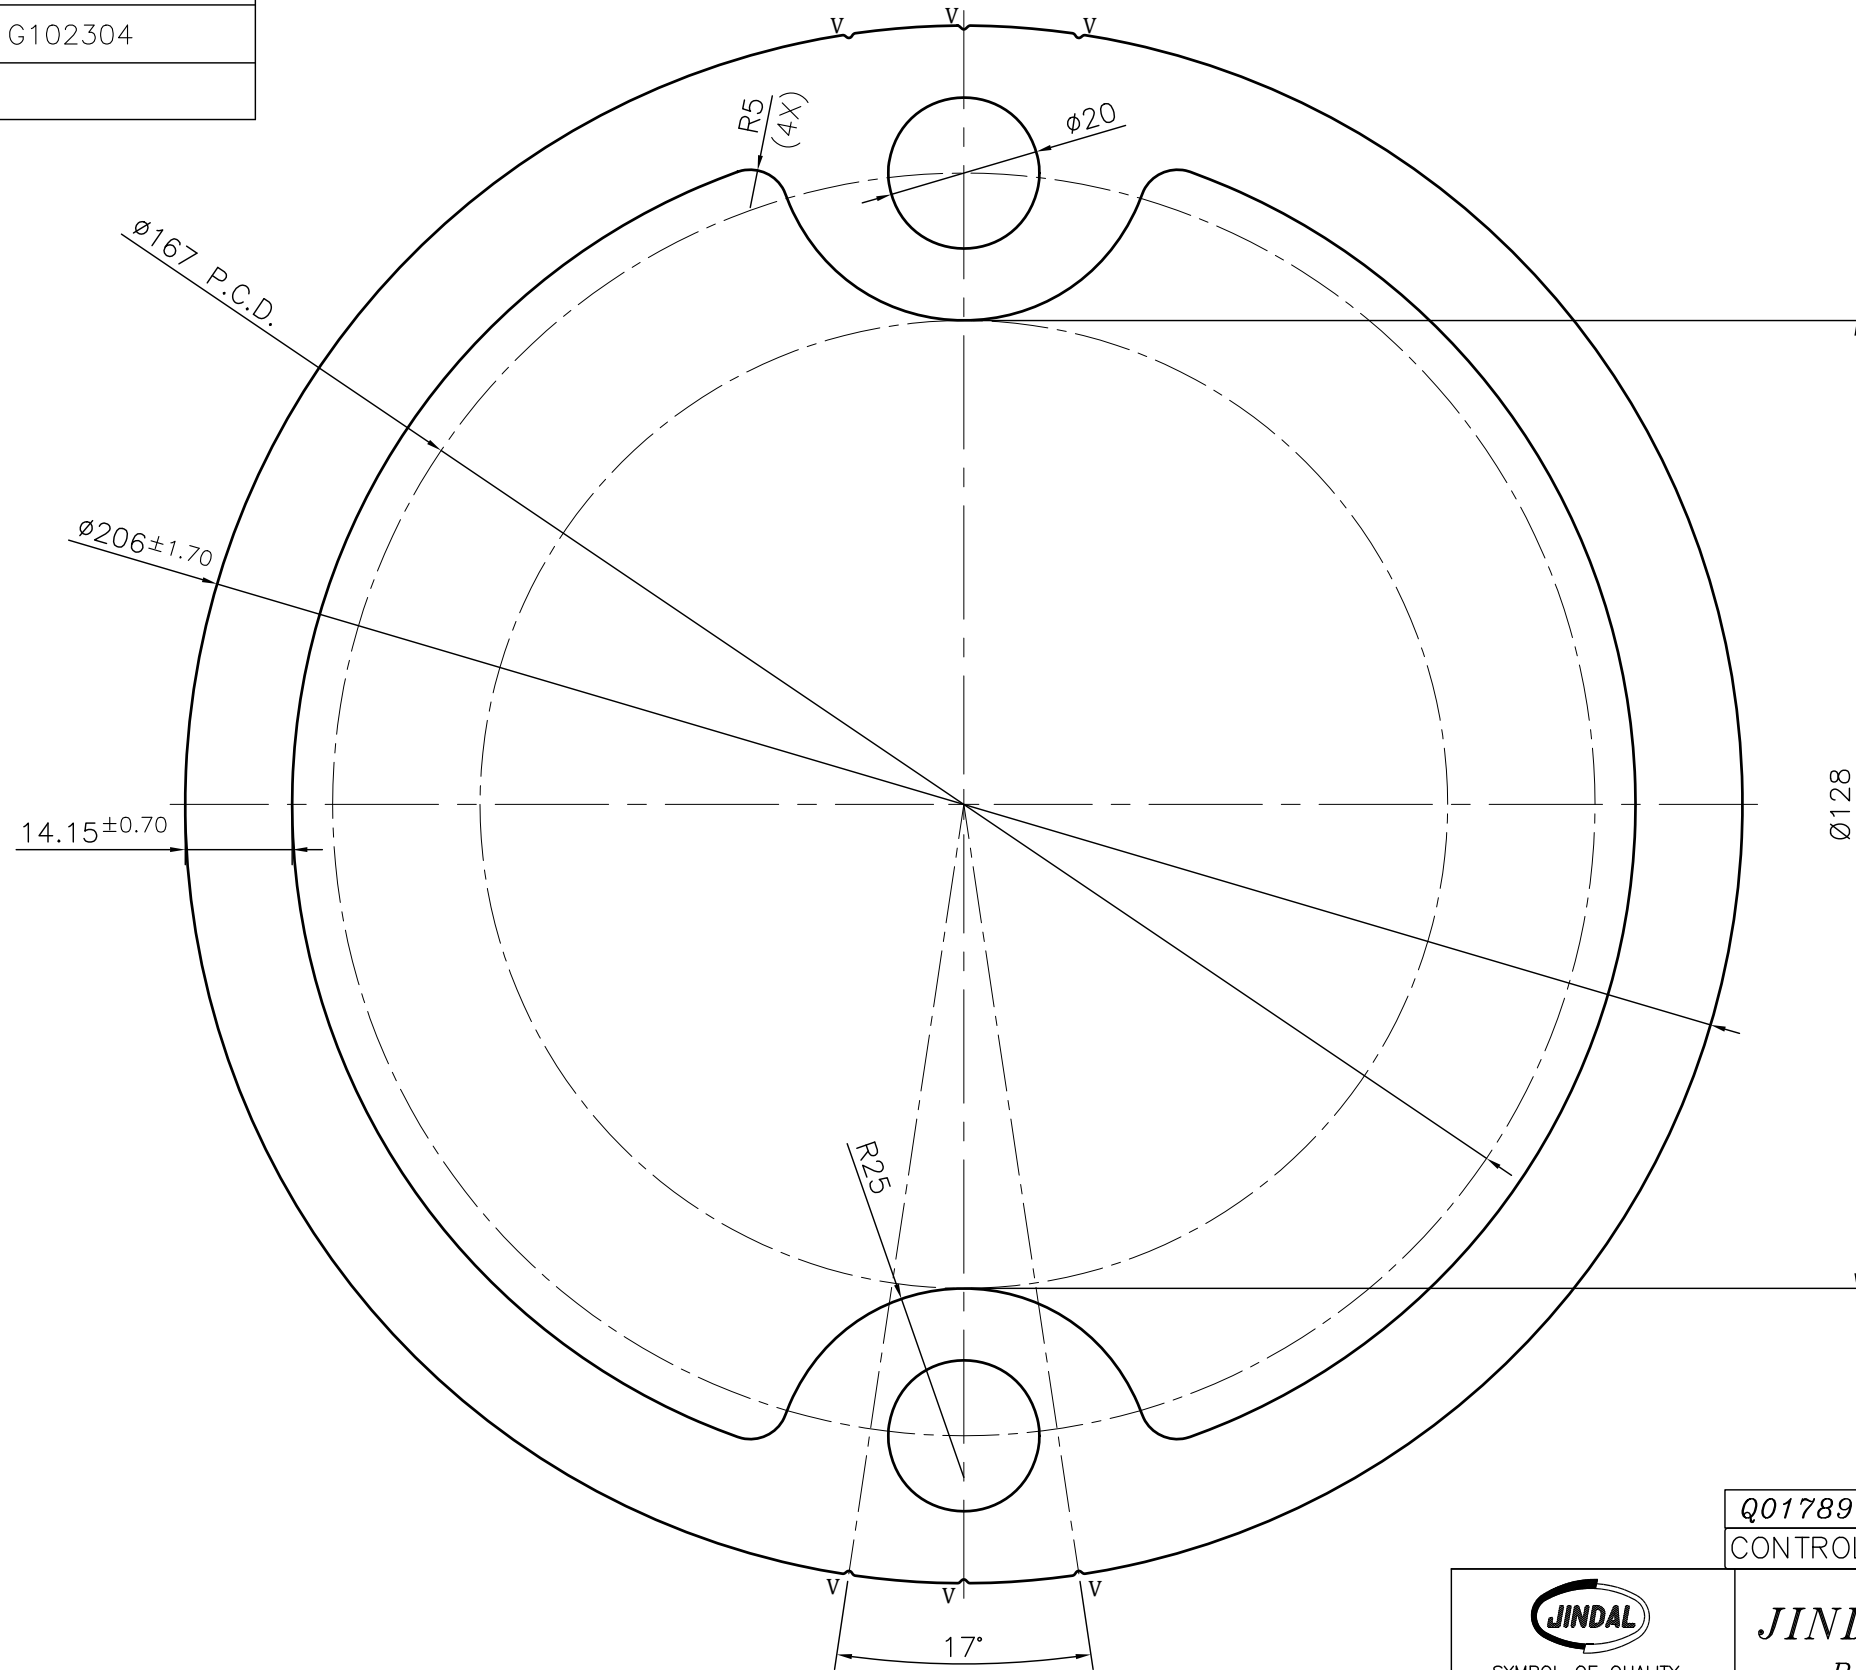


**NOTE:-**  
**V= 0.5x90° V-GROOVE (6 PLACES)**

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

Q01789

CONTROLLED COPY

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BHIWADI-301019 (INDIA)		NAME	DATE	
			DRAWN	ASHUTOSH	23-05-2024
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED			CHECKED	PARVESH	03-06-2024
			APPROVED	J.N.RAI	03-06-2024
PARTY'S NAME PIVOT SOLUTIONS			SCALE	1:1	
			AREA mm <sup>2</sup>	9752.465	
PARTY'S DRAWING No. AS PER PROPOSAL DRAWING			PERIMETER mm.	649.224	
			WEIGHT kg/m	26.332	
ALLOY & TEMPER 6005 T6			DRAWING No.	SECTION No.	
			PRODUCT CODE:-075		
DESCRIPTION PULLEY SECTION			HSN CODE:- 76042100		

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD ≤ 100	100 < CD ≤ 200	200 < CD ≤ 300	300 < CD ≤ 500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 - 25.0	±0.30	±0.40	±0.50	±0.60
25.0 - 50.0	±0.50	±0.60	±0.80	±0.90
50.0 - 100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80