
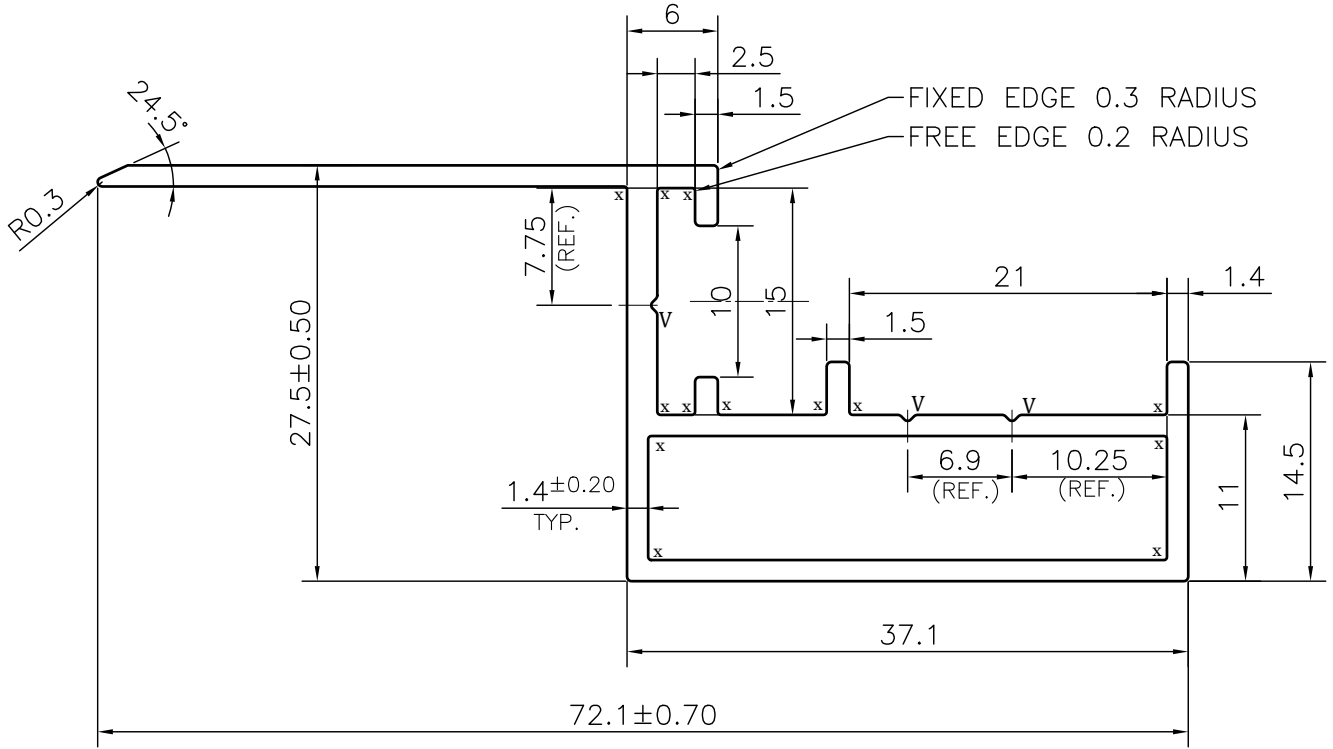


P-JAL-B-537-1

G102308

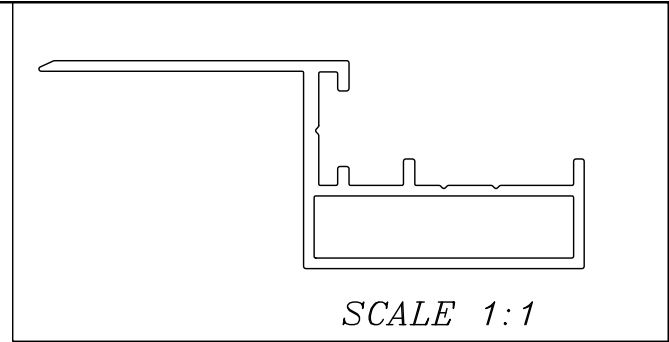

NOTE:-

x= 0.2 RADIUS (13 PLACES)

V= 0.4x90° V-GROOVE (3 PLACES)

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD<100	100<CD<200	200<CD<300	300<CD<500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 -25.0	±0.30	±0.40	±0.50	±0.60
25.0 -50.0	±0.50	±0.60	±0.80	±0.90
50.0 -100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80

☞ ROUND OFF ALL SHARP CORNERS WITH 0.30 mm.

Q01848

CONTROLLED COPY

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

	NAME	DATE
DRAWN	ASHUTOSH	27-05-2024
CHECKED	PARVESH	06-06-2024
APPROVED	J.N.RAI	08-06-2024

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.30 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED

SCALE	2:1
AREA mm ²	230.682
PERIMETER mm.	228.966
WEIGHT kg/m	0.623

PARTY'S NAME	GO ALUBUILD PVT. LTD, BAWAL	
PARTY'S DRAWING No.	AS PER CAD DRAWING	
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-055
		HSN CODE:- 76042100
DESCRIPTION	CURTAIN WALL SECTION (30 MM THICK FIXED GLASS FRAME-R0)	

DRAWING No.	SECTION No.
P-JAL-B-537-1	7000002483
G102308	G102308