


P-JAL-B-640

G102831

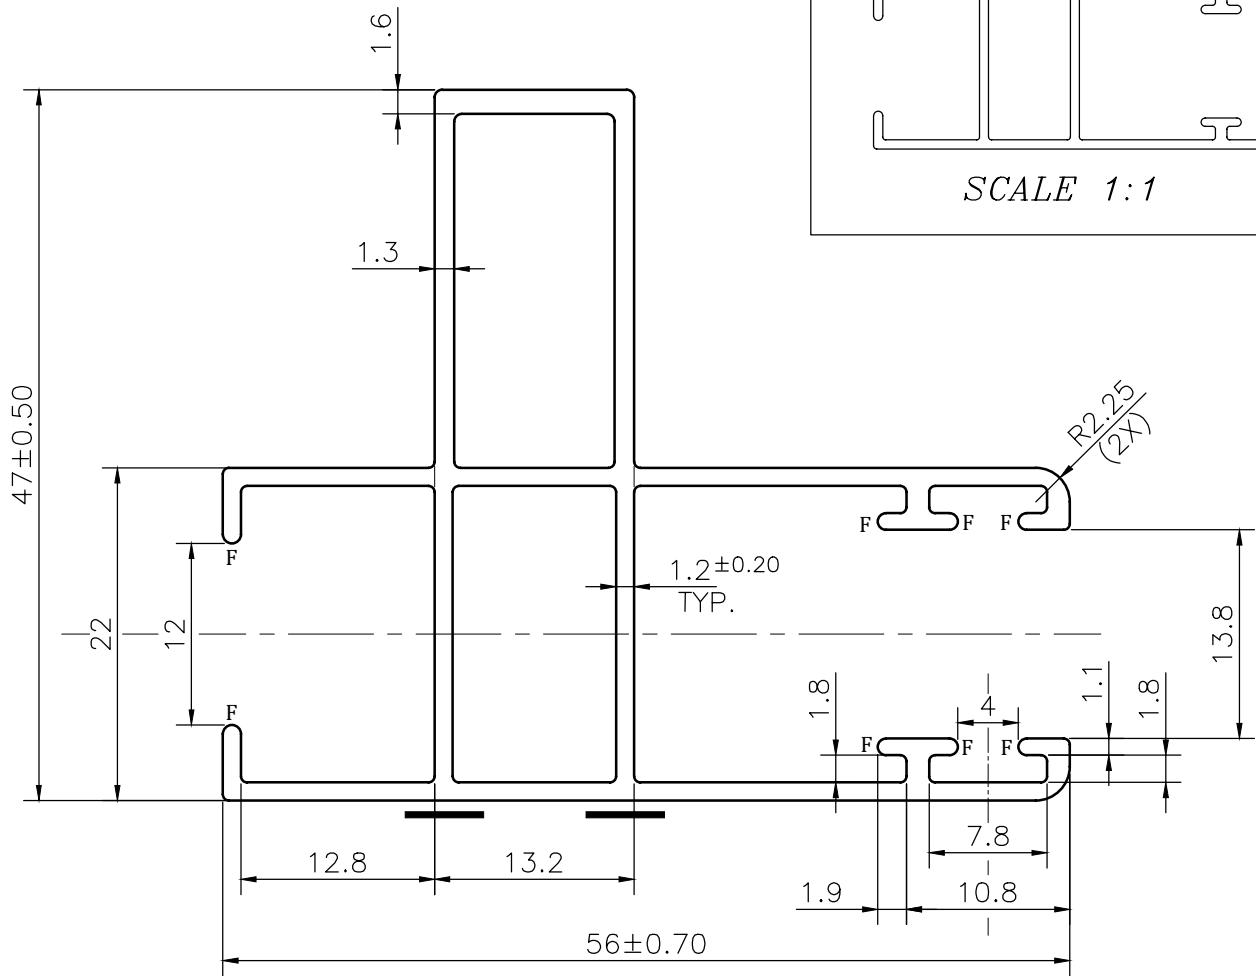

PLEASE NOTE:-

— DUE TO THICKNESS VARIATION
IMPRESSION MARK MAY APPEAR
IN THIS MARKED PORTION.

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD≤100	100<CD≤200	200<CD≤300	300<CD≤500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 - 25.0	±0.30	±0.40	±0.50	±0.60
25.0 - 50.0	±0.50	±0.60	±0.80	±0.90
50.0 - 100	±0.70	±0.90	±1.10	±1.30
100 - 150	—	±1.10	±1.30	±1.50
150 - 200	—	±1.3	±1.50	±1.80
200 - 300	—	—	±1.70	±2.10
300 - 450	—	—	—	±2.80

Q02033

CONTROLLED COPY

NOTE:-

F= FULL RADIUS (8 PLACES)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

	NAME	DATE
DRAWN	ASHUTOSH	02-07-2024
CHECKED	PARVESH	08-10-2024
APPROVED	J.N.RAI	08-10-2024

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9, UNLESS OTHERWISE SPECIFIED

SCALE	2:1
AREA mm ²	299.955
PERIMETER mm.	342.456
WEIGHT kg/m	0.810
DRAWING No.	SECTION No.
P-JAL-B-640	7000003049
G102831	G102831

PARTY'S NAME	PRANAV DOORS & WINDOWS PVT. LTD.
PARTY'S DRAWING No.	22MM SLIDER STRUCTURAL SHUTTER REFERENCE SECTION - G101056
ALLOY & TEMPER	6063 T6
	PRODUCT CODE:-048
	HSN CODE:- 76042100
DESCRIPTION	WINDOW SECTION