


P-JAL-B-747
G103156

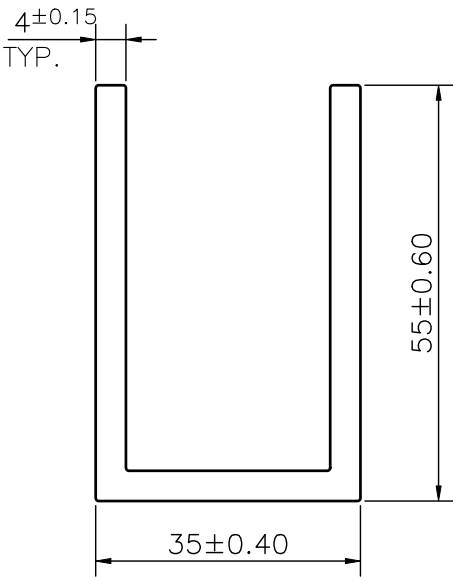

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD≤100	100<CD≤200	200<CD≤300	300<CD≤500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 –25.0	±0.30	±0.40	±0.50	±0.60
25.0 –50.0	±0.50	±0.60	±0.80	±0.90
50.0 –100	±0.70	±0.90	±1.10	±1.30
100 – 150	–	±1.10	±1.30	±1.50
150 – 200	–	±1.3	±1.50	±1.80
200 – 300	–	–	±1.70	±2.10
300 – 450	–	–	–	±2.80

Q02389

CONTROLLED COPY

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BHIWADI-301019 (INDIA)		DRAWN	ASHUTOSH	23-09-2024
			CHECKED	PARVESH	23-11-2024
			APPROVED	J.N.RAI	23-11-2024
			SCALE		1:1
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED			AREA mm ²		547.863
			PERIMETER mm.		280.63
			WEIGHT kg/m		1.479
			DRAWING No.		SECTION No.
PARTY'S NAME	AASTHA ALUMINA (P) LIMITED., GURUGRAM		P-JAL-B-747		7000003348
PARTY'S DRAWING No.	AS PER DRAWING U CHANNEL 35x55x55x4mm		G103156		G103156
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-014			
		HSN CODE:- 76042990			
DESCRIPTION	CHANNEL SQUARE FILLET TOE				