



G103692

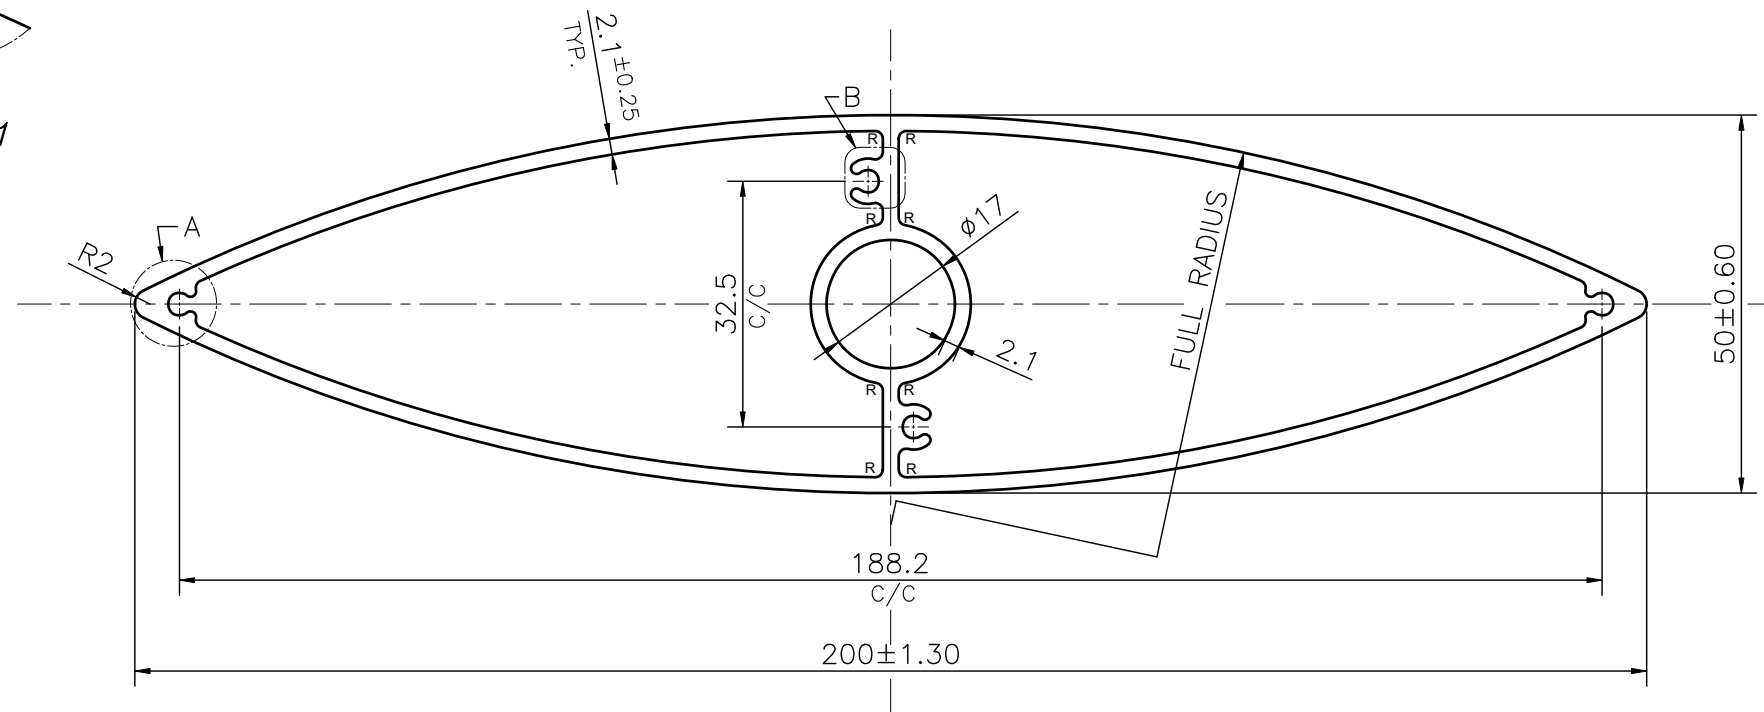

R= 1.0 RADIUS (16 PLACES)
F= FULL RADIUS (8 PLACES)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= $\pm 2^\circ$
4. FLATNESS= 0.007xWIDTH

CONTROLLED COPY



1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED

		PERIMETER mm.	418.800
PARTY'S NAME	VIBRANT TECHNIQ, DELHI		WEIGHT kg/m
			2.945
		DRAWING No.	SECTION No.
PARTY'S DRAWING No.	AS PER SAMPLE		P-JAL-B-1002
			7000003941
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-048	G103692
		HSN CODE:- 76042100	G103692
DESCRIPTION	LOUVER SECTION-DRAWING FOR DYE FOR AF200		