



G104362

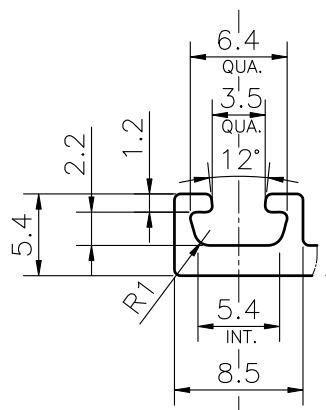

NOTE:-
V= 0.40x90° V-GROOVE (1 PLACE)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= $\pm 2^\circ$
4. FLATNESS= 0.007xWIDTH

CONTROLLED COPY



JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	KSV INFRABUILD., GURGAON		PERIMETER mm.	398.700
			WEIGHT kg/m	1.474
PARTY'S DRAWING No.	AS PER CAD DRAWING-KSV.AW.-03		DRAWING No.	SECTION No.
			P-JAL-B-1235	7000004815
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-055	G104362	G104362
		HSN CODE:- 76042100		
DESCRIPTION	CURTAIN WALL SECTION			