



P-JAL-B-1282

G104407

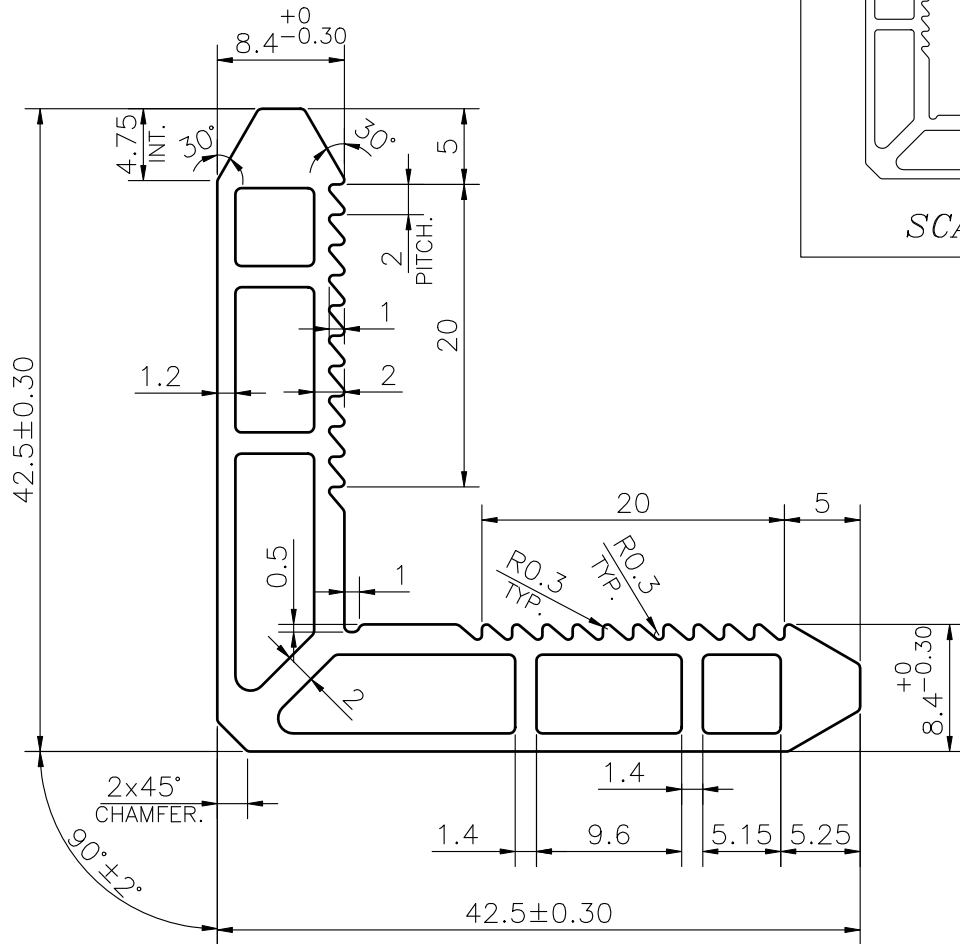

SCALE 1:1

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD ≤ 100	100 < CD ≤ 200	200 < CD ≤ 300	300 < CD ≤ 500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 - 25.0	±0.30	±0.40	±0.50	±0.60
25.0 - 50.0	±0.50	±0.60	±0.80	±0.90
50.0 - 100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80

Q03957

CONTROLLED COPY

NOTE:-

HARDNESS:- 12-13 WEBSTER

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

	NAME	DATE
DRAWN	ASHUTOSH	03-09-2025
CHECKED	PARVESH	08-09-2025
APPROVED	J.N.RAI	08-09-2025
SCALE	2:1	
AREA mm ²	292.708	
PERIMETER mm.	185.215	
WEIGHT kg/m	0.790	
DRAWING No.	SECTION No.	
P-JAL-B-1282	7000004891	
G104407	G104407	

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9, UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	RAVIKE ENGINEERS PVT. LTD., DELHI	
PARTY'S DRAWING No.	AS PER CAD DRAWING	
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-080 HSN CODE:- 76042100
DESCRIPTION	SOLAR SECTION	