
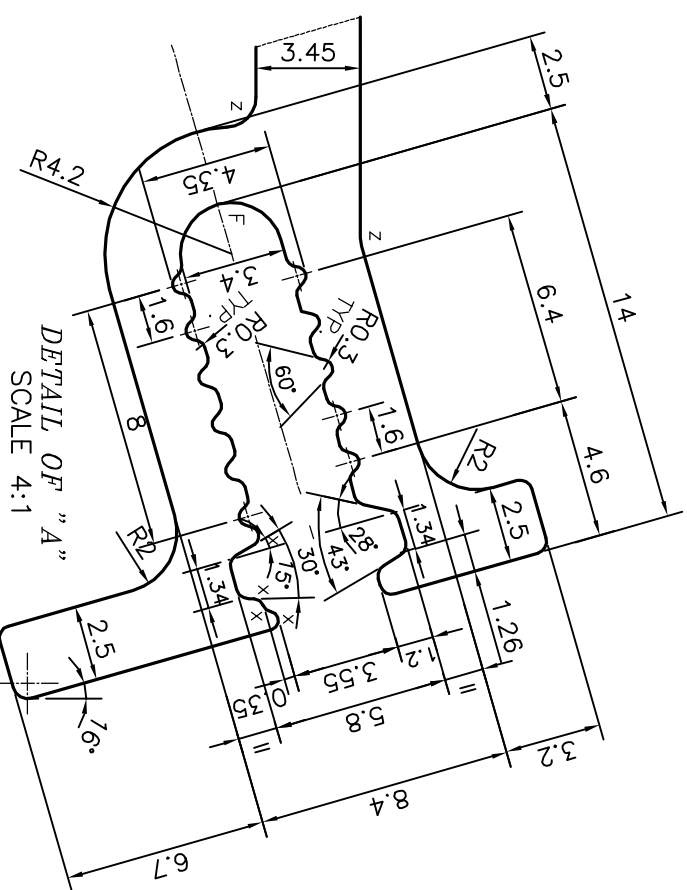
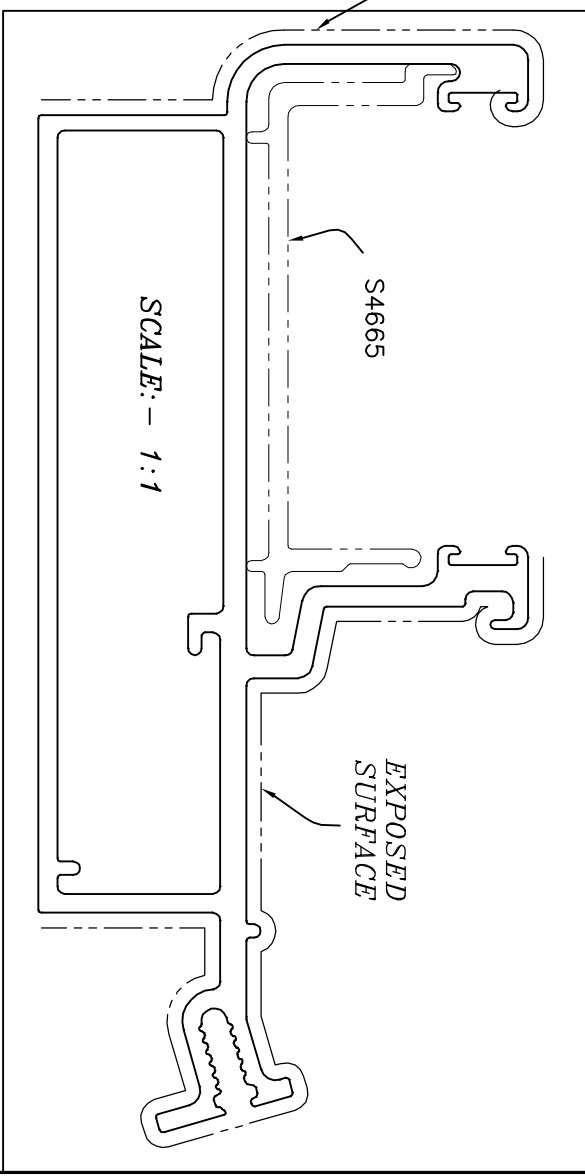


P-15276-1

S4800

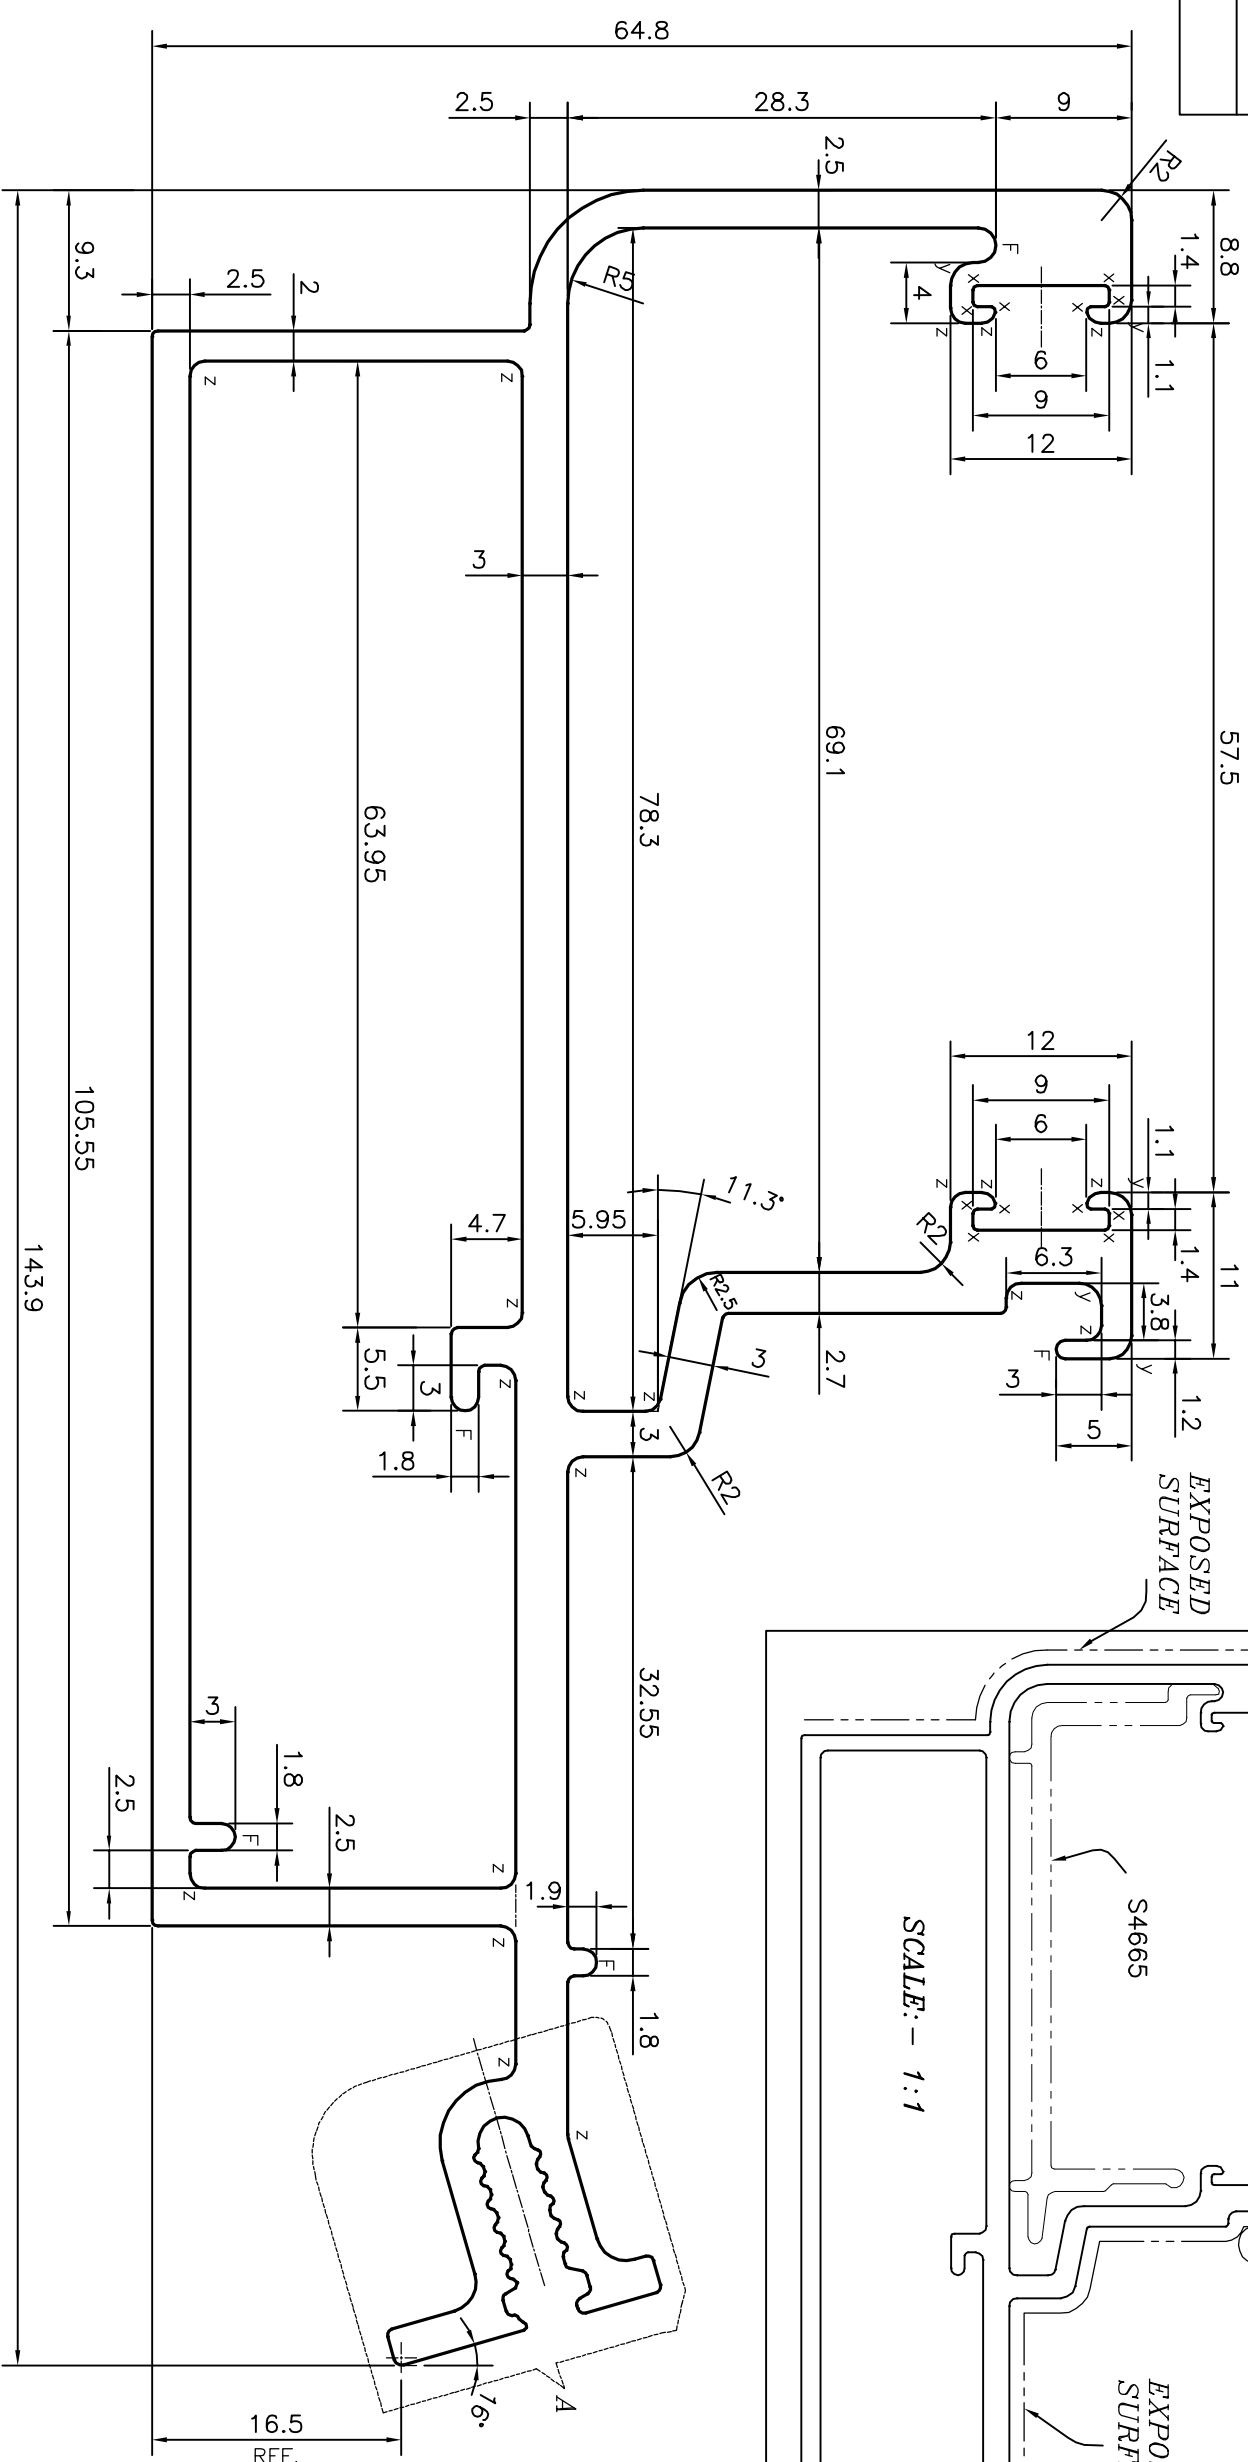

F = FULL RADIUS (6 PLACES)
X = RADIUS 0.3 mm. (16 PLACES)
Z = RADIUS 1 mm. (20 PLACES)
y = RADIUS 1.5 mm. (4 PLACES)

TOLERANCE ON THICKNESS = +0.3
TOLERANCE ON WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS = -0.1

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS	
UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75
	UPTO 120.0mm - ±0.85
	UPTO 160.0mm - ±1.02
	UPTO 200.0mm - ±1.14
	UPTO 250.0mm - ±1.40
	UPTO 300.0mm - ±1.65

<p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p>	
<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>	
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983, UNLESS OTHERWISE SPECIFIED</p>	
PARTY'S NAME	OMKAR REALTORS & DEVELOPERS PVT LTD., MUMBAI
PARTY'S DRAWING No.	AS PER AUTOCAD DRAWING-AP-1628
ALLOY & TEMPER	6063 T6
DESCRIPTION	CURTAIN WALL SECTION

DRAWN	NAME	DATE
CHECKED	PARVESH	09-11-2015
APPROVED	S.S.GARG	22-12-2015
SCALE	2:1	
AREA	mm ²	1188.601
PERIMETER	mm.	610.293
WEIGHT	kg/m	3.209
DRAWING No.	SECTION No.	
P-15276-1	-	
S4800	S4800	