


P-16568

S5203

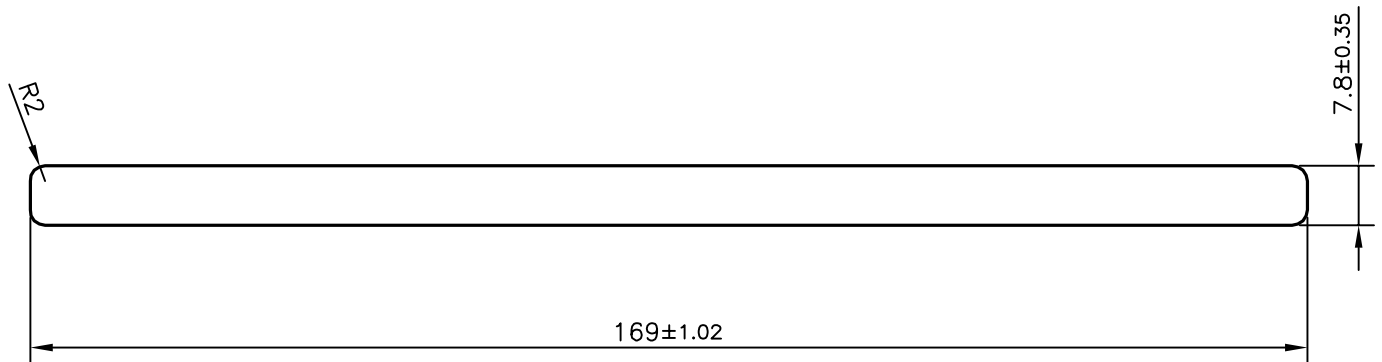

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

| | | | |
|--------------------------|---------------------------|---------------------------|---------------------------------------------------------------------------------------------------------|
| UPTO 6.40mm - ± 0.20 | UPTO 32.0mm - ± 0.38 | UPTO 120.0mm - ± 0.85 | 1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= $\pm 2^\circ$ 4. FLATNESS =0.007xWIDTH |
| UPTO 10.0mm - ± 0.23 | UPTO 50.0mm - ± 0.46 | UPTO 160.0mm - ± 1.02 | |
| UPTO 12.0mm - ± 0.25 | UPTO 60.0mm - ± 0.53 | UPTO 200.0mm - ± 1.14 | |
| UPTO 16.0mm - ± 0.28 | UPTO 80.0mm - ± 0.69 | UPTO 250.0mm - ± 1.40 | |
| UPTO 25.0mm - ± 0.30 | UPTO 100.0mm - ± 0.75 | UPTO 300.0mm - ± 1.65 | |



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

| | NAME | DATE |
|----------|-----------|------------|
| DRAWN | KIRAN | 30-11-2016 |
| CHECKED | | |
| APPROVED | B.NATARAJ | 05-12-2016 |

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.50 mm.
- TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED

| | |
|----------------------|----------|
| SCALE | 1:1 |
| AREA mm ² | 1314.766 |
| PERIMETER mm. | 350.166 |
| WEIGHT kg/m | 3.550 |

| | | | | | |
|---------------------|----------------------------------|-------------|---------|-------------|-------|
| PARTY'S NAME | SUNSHINE TECHNOLOGIES, BANGALORE | DRAWING No. | P-16568 | SECTION No. | |
| PARTY'S DRAWING No. | AS PER DRAWING | | S5203 | | S5203 |
| ALLOY & TEMPER | E91E 'W' | | | | |
| DESCRIPTION | FLAT BAR WITH CORNER RADII 2 mm | | | | |