P–16569
S5208



SCALE 1:1

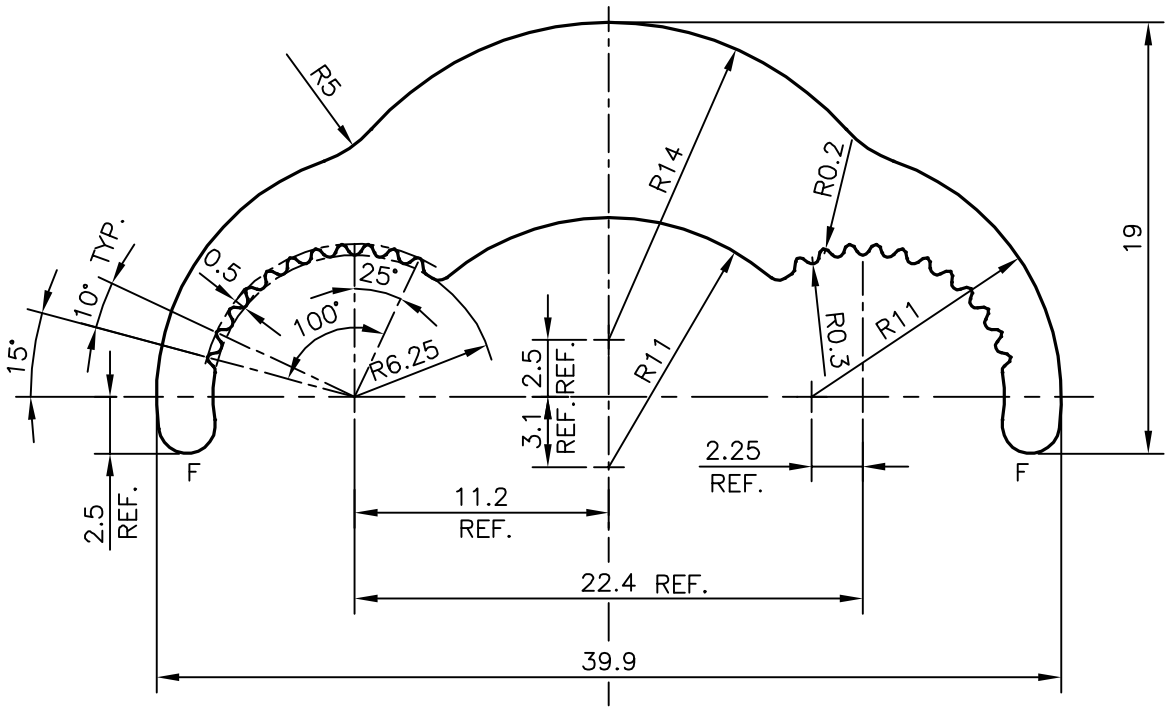

F : FULL RADIUS (2 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm – ±0.20	UPTO 32.0mm – ±0.38	UPTO 120.0mm – ±0.85
UPTO 10.0mm – ±0.23	UPTO 50.0mm – ±0.46	UPTO 160.0mm – ±1.02
UPTO 12.0mm – ±0.25	UPTO 60.0mm – ±0.53	UPTO 200.0mm – ±1.14
UPTO 16.0mm – ±0.28	UPTO 80.0mm – ±0.69	UPTO 250.0mm – ±1.40
UPTO 25.0mm – ±0.30	UPTO 100.0mm – ±0.75	UPTO 300.0mm – ±1.65

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.007xWIDTH

JINDAL
SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.

BANGALORE–560073 (INDIA)

	NAME	DATE
DRAWN	KIRAN	30–11–2016
CHECKED		
APPROVED	B.NATARAJ	10–12–2016

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm.
3. TOLERANCES WILL BE AS PER IS:3965–1981, UNLESS OTHERWISE SPECIFIED

SCALE	3:1
AREA mm^2	269.329
PERIMETER mm.	124.041
WEIGHT kg/m	0.727

PARTY'S NAME	SICAME INDIA CONNECTORS PVT. LTD., BANGALORE
PARTY'S DRAWING No.	AS PER DRAWING–F10088335 A
ALLOY & TEMPER	6005A T6
DESCRIPTION	ELECTRICAL SECTION–UPPER BODY

DRAWING No.	SECTION No.
P–16569	
S5208	S5208