


P-16565-3


S5214

a: RADIUS 1.00 mm (26 PLACES)  
 b: RADIUS 2.00 mm (3 PLACES)  
 d: RADIUS 3.00 mm (7 PLACES)

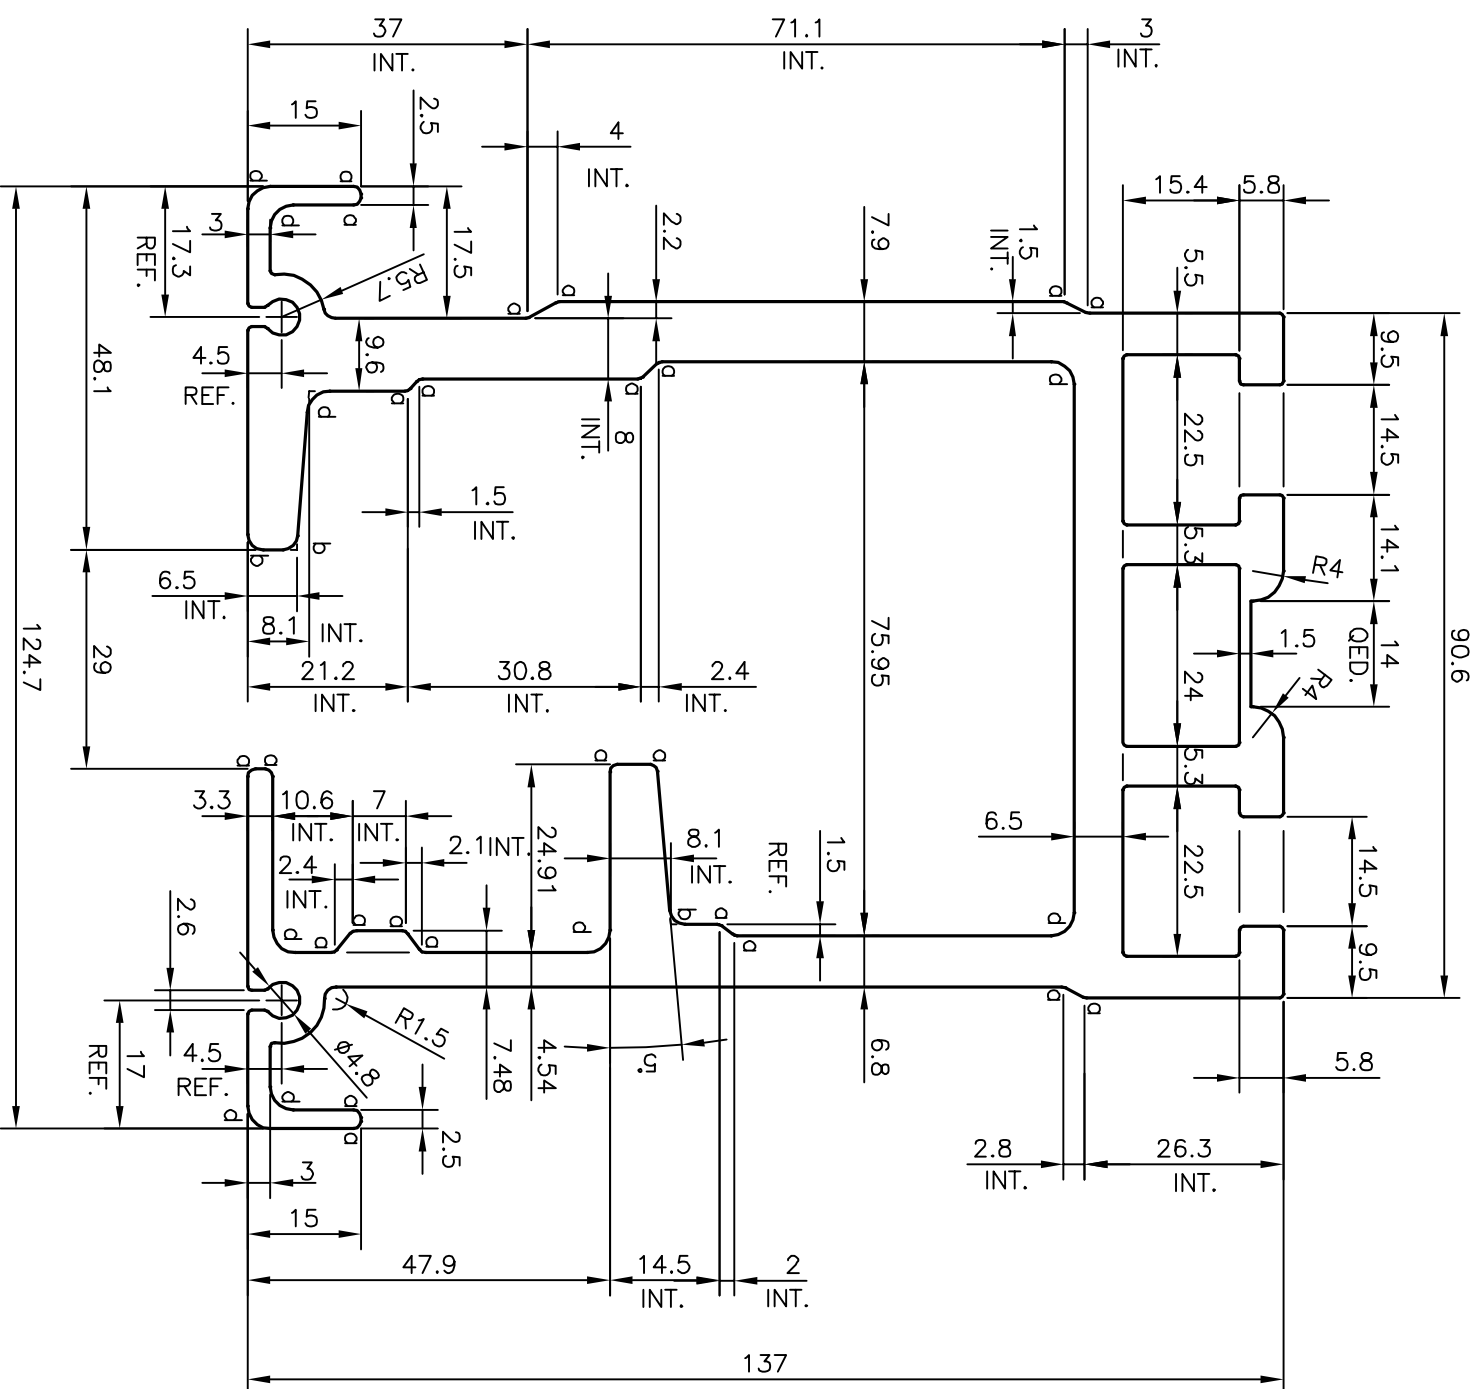

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS					
UPTO 6.40mm	-	±0.20	UPTO 32.0mm	-	±0.38
UPTO 10.0mm	-	±0.23	UPTO 50.0mm	-	±0.46
UPTO 12.0mm	-	±0.25	UPTO 60.0mm	-	±0.53
UPTO 16.0mm	-	±0.28	UPTO 80.0mm	-	±0.69
UPTO 25.0mm	-	±0.30	UPTO 100.0mm	-	±0.75

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.007xWIDTH

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED		SCALE 1:1 AREA mm <sup>2</sup> 3428.68 PERIMETER mm. 1056.051 WEIGHT kg/m 9.257	
PARTY'S NAME		AETMAAD ENTERPRISES, MUMBAI	
PARTY'S DRAWING No.		AS PER AUTOCAD DRAWING	
ALLOY & TEMPER		6063 T6	
DESCRIPTION		CONVEYOR SECTION	
DRAWN	KIRAN	NAME	DATE
CHECKED			16-12-2016
APPROVED	B.NATARAU		20-12-2016
DRAWING No.		SECTION No.	
P-16565-3			
S5214		S5214	