


P-16841-1

S5326

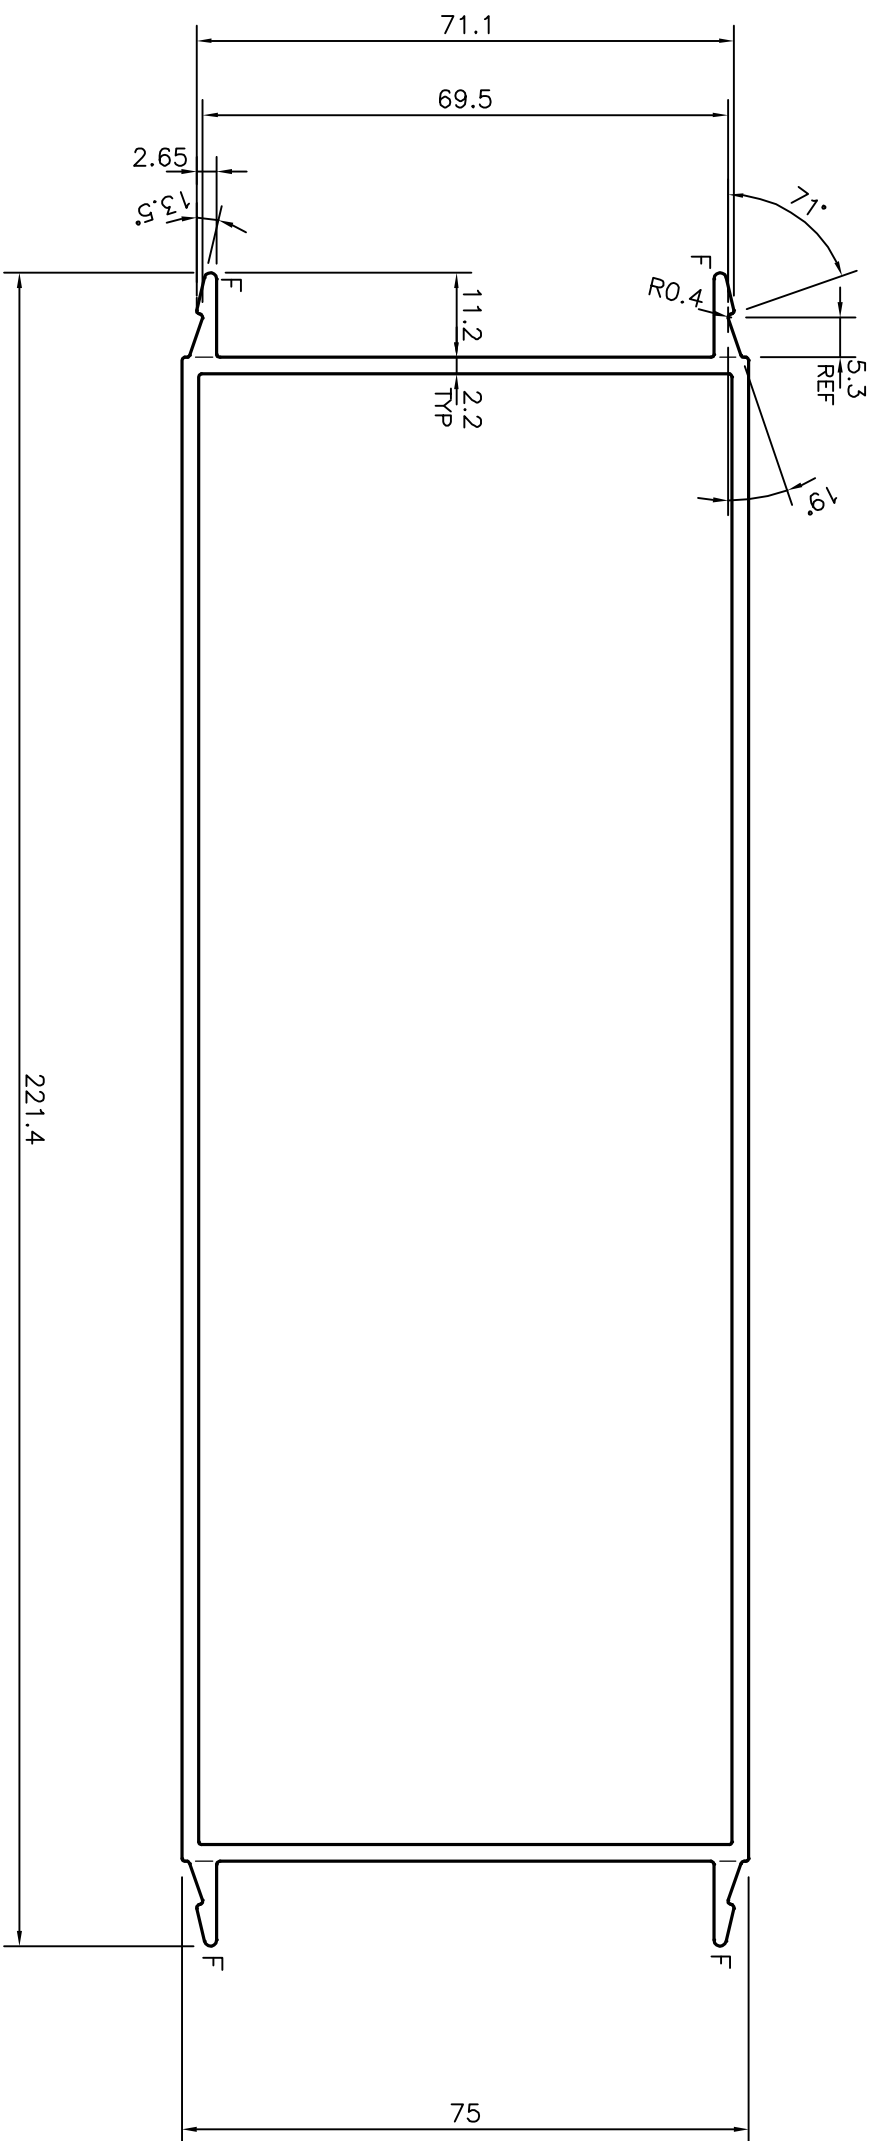

F = FULL RADIUS (4 PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS


UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00	
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14	

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	
	DRAWN	J.P.KAUSHIK 28-02-2017

1. ALL DIMENSIONS ARE IN mm.	SCALE	1:1
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.	AREA mm <sup>2</sup>	1292.788
3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED	PERIMETER mm.	628.39

PARTY'S NAME	GLOBAL SYNDICATE, BANGALORE	WEIGHT kg/m	3.491
PARTY'S DRAWING No.	AS PER AutocAD DRAWING	DRAWING No.	-
ALLOY & TEMPER	6063 T6	SECTION No.	S5326
DESCRIPTION	MISC. SECTION		

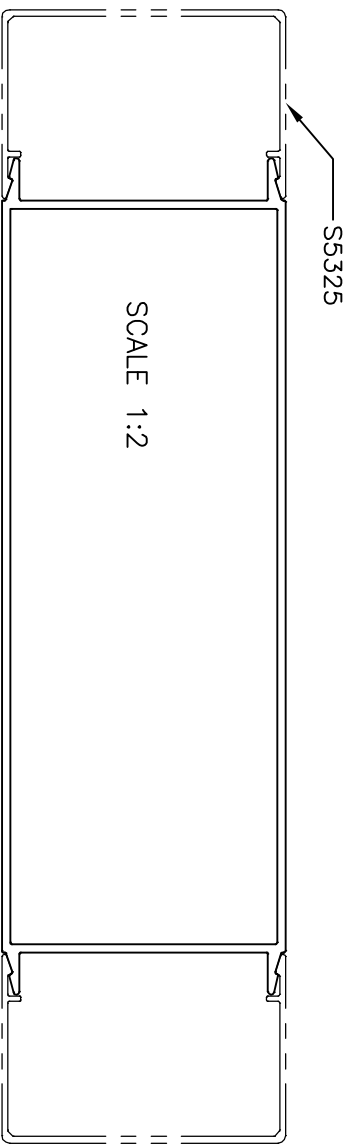

SCALE 1:2