


P-17582

S5552

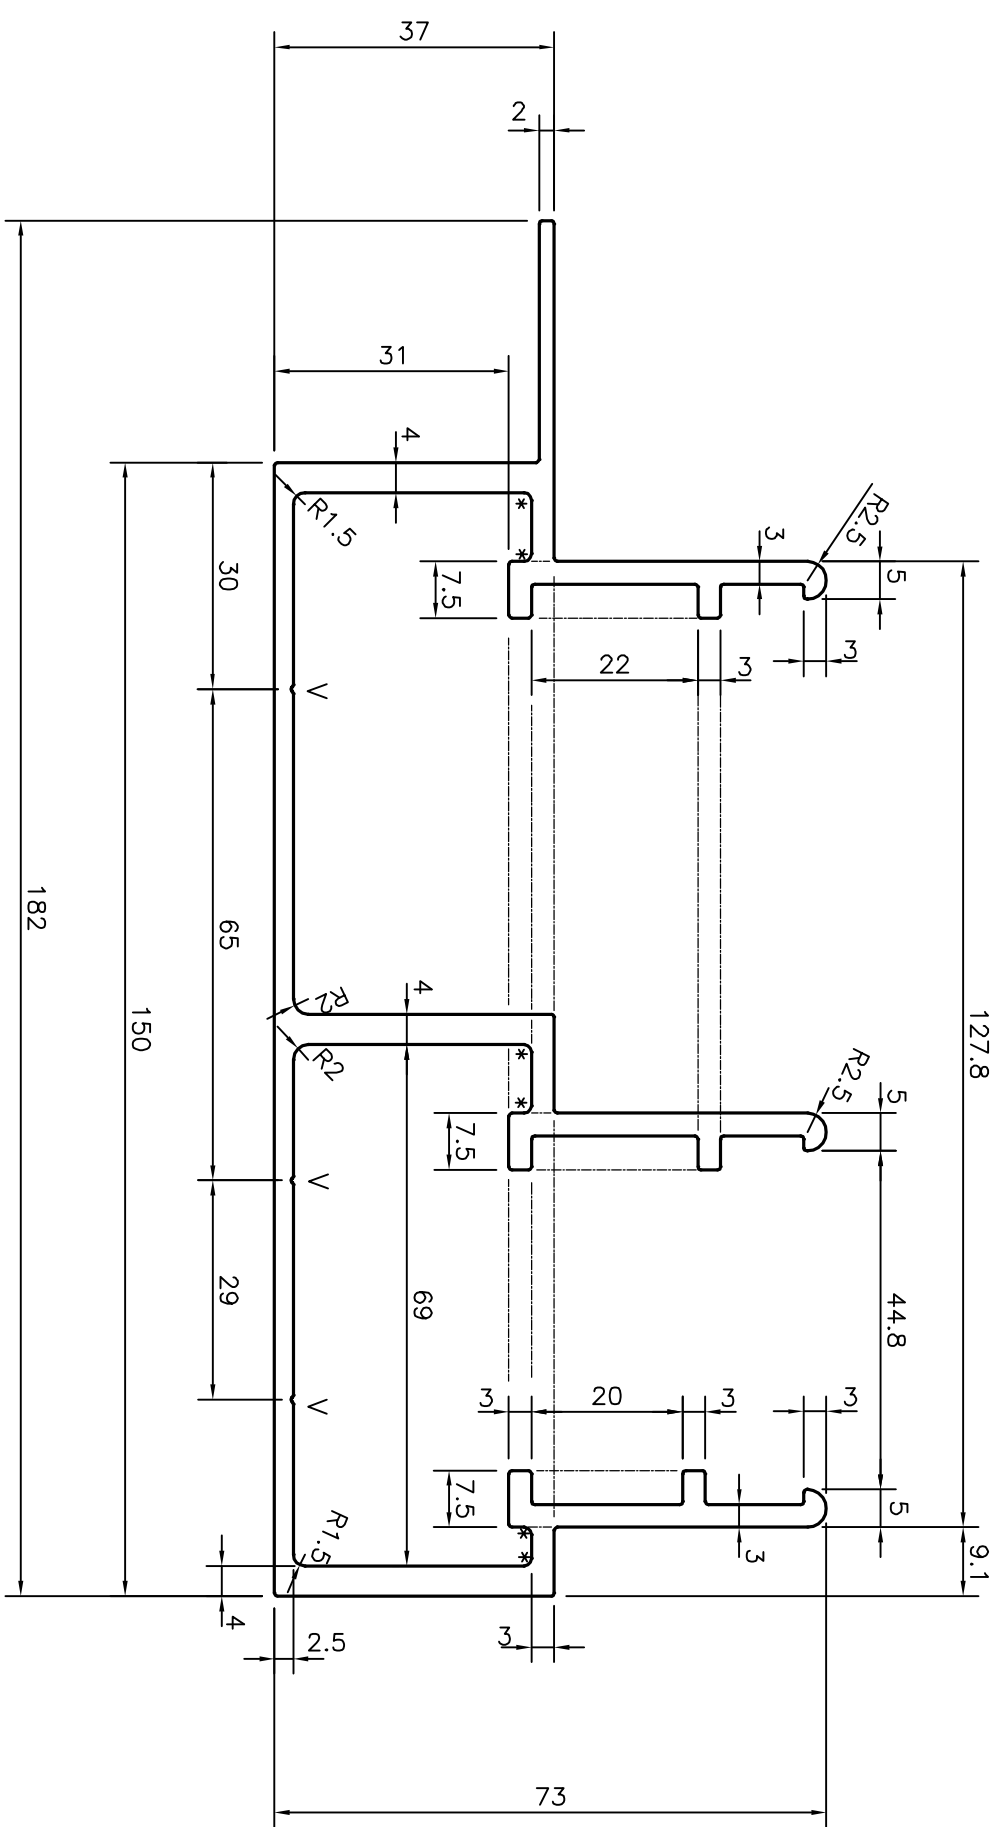

V = V GROOVE 0.3x90° (3 PLACES)
 * = 1.0 RADIUS (6 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>	<p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p>	DRAWN	J.P.KAUSHIK	DATE	21-10-2017
		CHECKED			
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 UNLESS OTHERWISE SPECIFIED</p>		APPROVED	J.N.RAI		30-10-2017
<p>PARTY'S NAME ALUMINIUM INNOVATIONS, BANGALORE</p>		SCALE			1:1
<p>PARTY'S DRAWING No. AS PER DRAWING</p>		AREA			1394.986 mm ²
<p>ALLOY & TEMPER 6063 T6</p>		PERIMETER			922.241 mm
<p>DESCRIPTION CURTAIN WALL SECTION</p>		WEIGHT			3.766 kg/m
		DRAWING No.			SECTION No.
		P-17582			-
		S5552			S5552