


P-17617

S5618

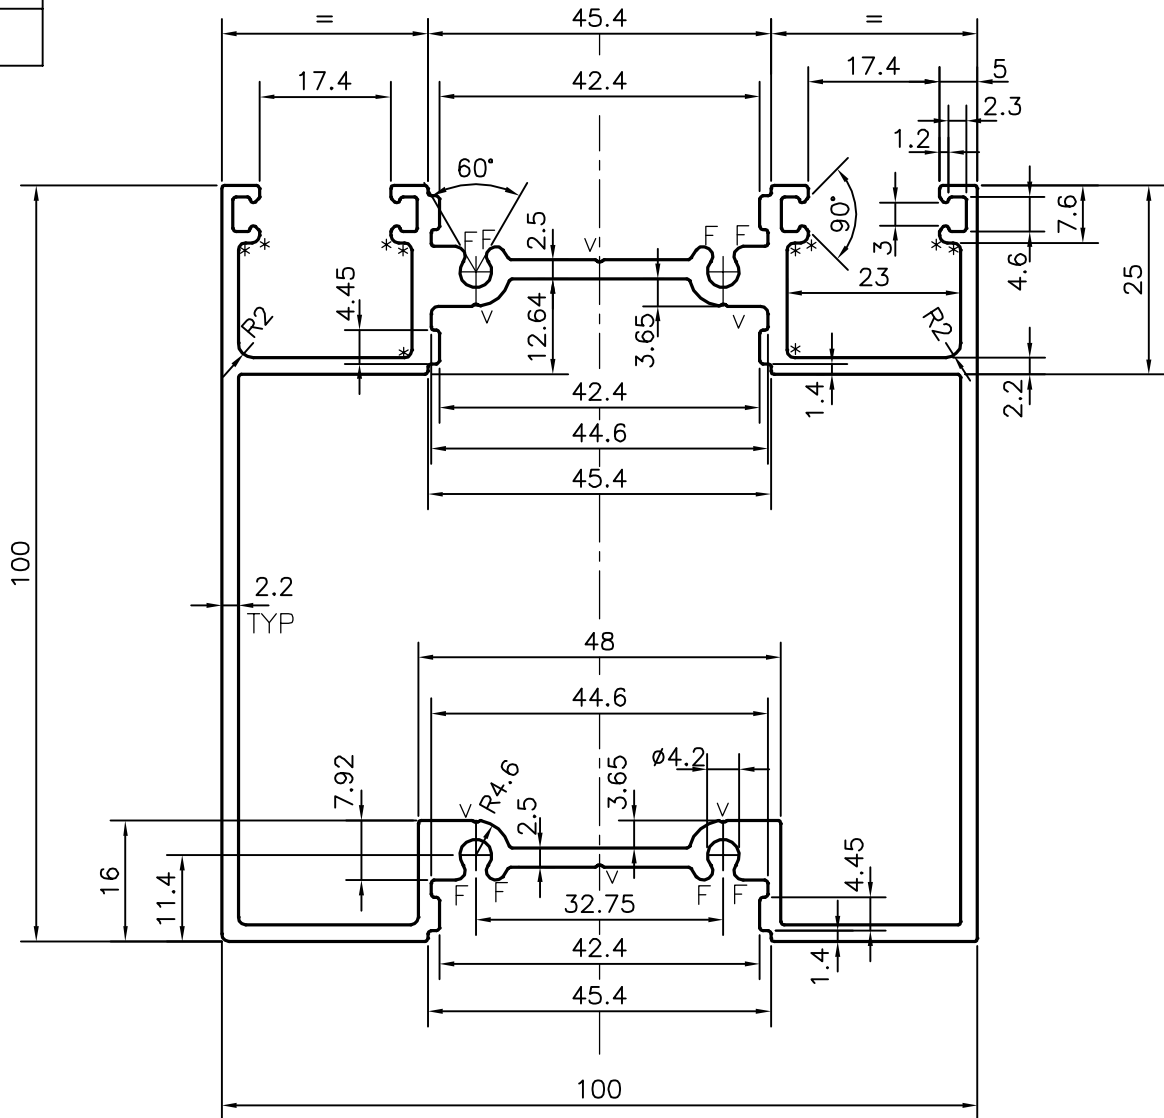

F = FULL RADIUS(8 PLACES)

* = 1.0 RADIUS(10 PLACES)

V = V GROOVE 0.3x90° (6 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	07-11-2017
CHECKED		
APPROVED	B.NATARAJA	25-12-2017

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER, IS:6477-1983 UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm ²	1233.96
PERIMETER mm.	618.996
WEIGHT kg/m	3.332

PARTY'S NAME	ALLARCH INDIA PVT. LTD., MUMBAI	DRAWING No.	P-17617	SECTION No.	-
PARTY'S DRAWING No.	AS PER DRAWING		S5618		S5618
ALLOY & TEMPER	6063 T6				
DESCRIPTION	MISC. SECTION				