
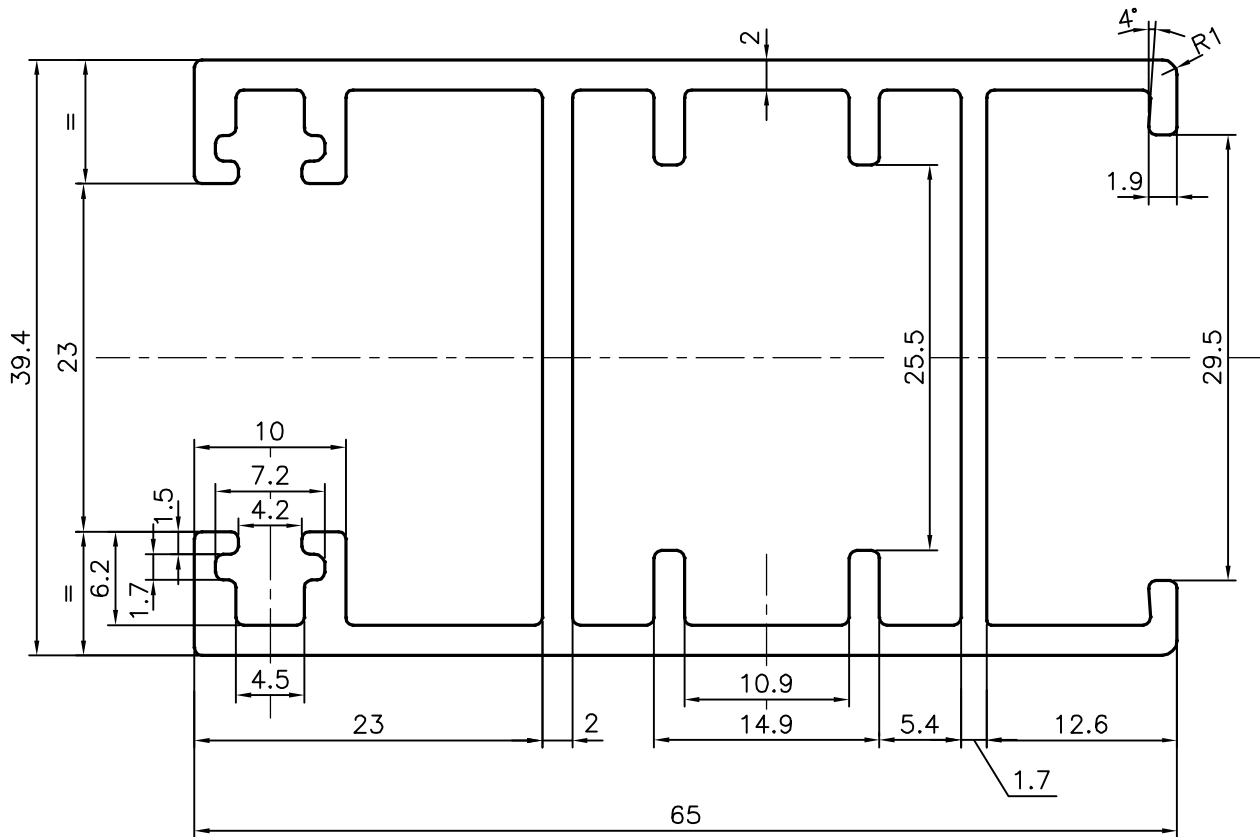


P-18198


S5838

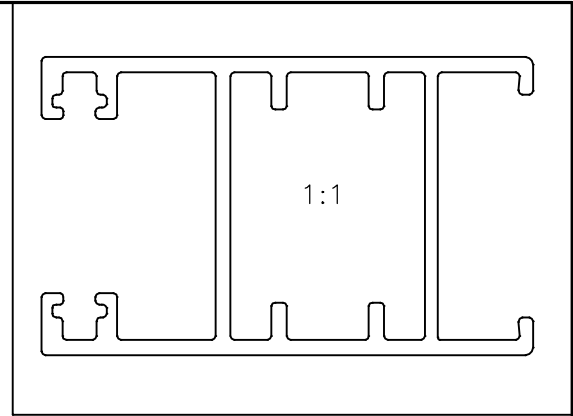

UNSPECIFIED RADIUS 0.5 mm

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27	1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= ±2° 4. FLATNESS =0.006xWIDTH
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40	
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52	
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00		
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14		

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	DRAWN	NAME	DATE
		CHECKED	J.P.KAUSHIK	11-05-2018
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER,IS:6477-1983 UNLESS OTHERWISE SPECIFIED		APPROVED	B.NATARAJA	28-05-2018
		SCALE		2:1
PARTY'S NAME GLASS WALL SYSTEMS INDIA PVT. LTD., MUMBAI		AREA	mm ²	501.027
		PERIMETER	mm.	343.769
PARTY'S DRAWING No. AS PER DRAWING-95213		WEIGHT	kg/m	1.353
		DRAWING No.	SECTION No.	
ALLOY & TEMPER 6063 T6		P-18198	-	
		S5838	S5838	
DESCRIPTION SLIDING SHUTTER SECTION				