


P-18319

S5898

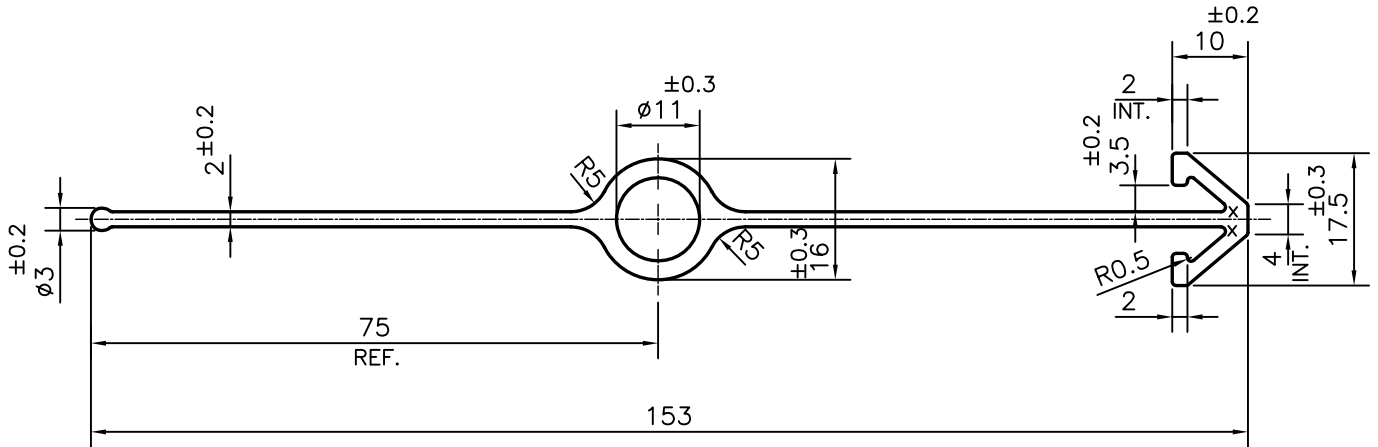


X = RADIUS 0.6 mm. (2 PLACES)

ROUND OFF ALL SHARP CORNERS WITH 0.50 mm.

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - $\pm 0.20$	UPTO 32.0mm - $\pm 0.38$	UPTO 120.0mm - $\pm 0.85$
UPTO 10.0mm - $\pm 0.23$	UPTO 50.0mm - $\pm 0.46$	UPTO 160.0mm - $\pm 1.02$
UPTO 12.0mm - $\pm 0.25$	UPTO 60.0mm - $\pm 0.53$	UPTO 200.0mm - $\pm 1.14$
UPTO 16.0mm - $\pm 0.28$	UPTO 80.0mm - $\pm 0.69$	UPTO 250.0mm - $\pm 1.40$
UPTO 25.0mm - $\pm 0.30$	UPTO 100.0mm - $\pm 0.75$	UPTO 300.0mm - $\pm 1.65$

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	DRAWN	NAME	DATE
		CHECKED	PARVESH	16-06-2018
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.4 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983, UNLESS OTHERWISE SPECIFIED		APPROVED	B.NATARAJA	23-06-2018
		SCALE		1:1
PARTY'S NAME BHORUKA FABCONS PVT. LTD., MYSORE		AREA	mm <sup>2</sup>	446.678
		PERIMETER	mm.	368.319
PARTY'S DRAWING No. 11713		WEIGHT	kg/m	1.206
		DRAWING No.		SECTION No.
ALLOY & TEMPER 6063 T6		P-18319		-
		S5898		S5898
DESCRIPTION ARCHITECTURAL SECTION				