


P-18781


S6023

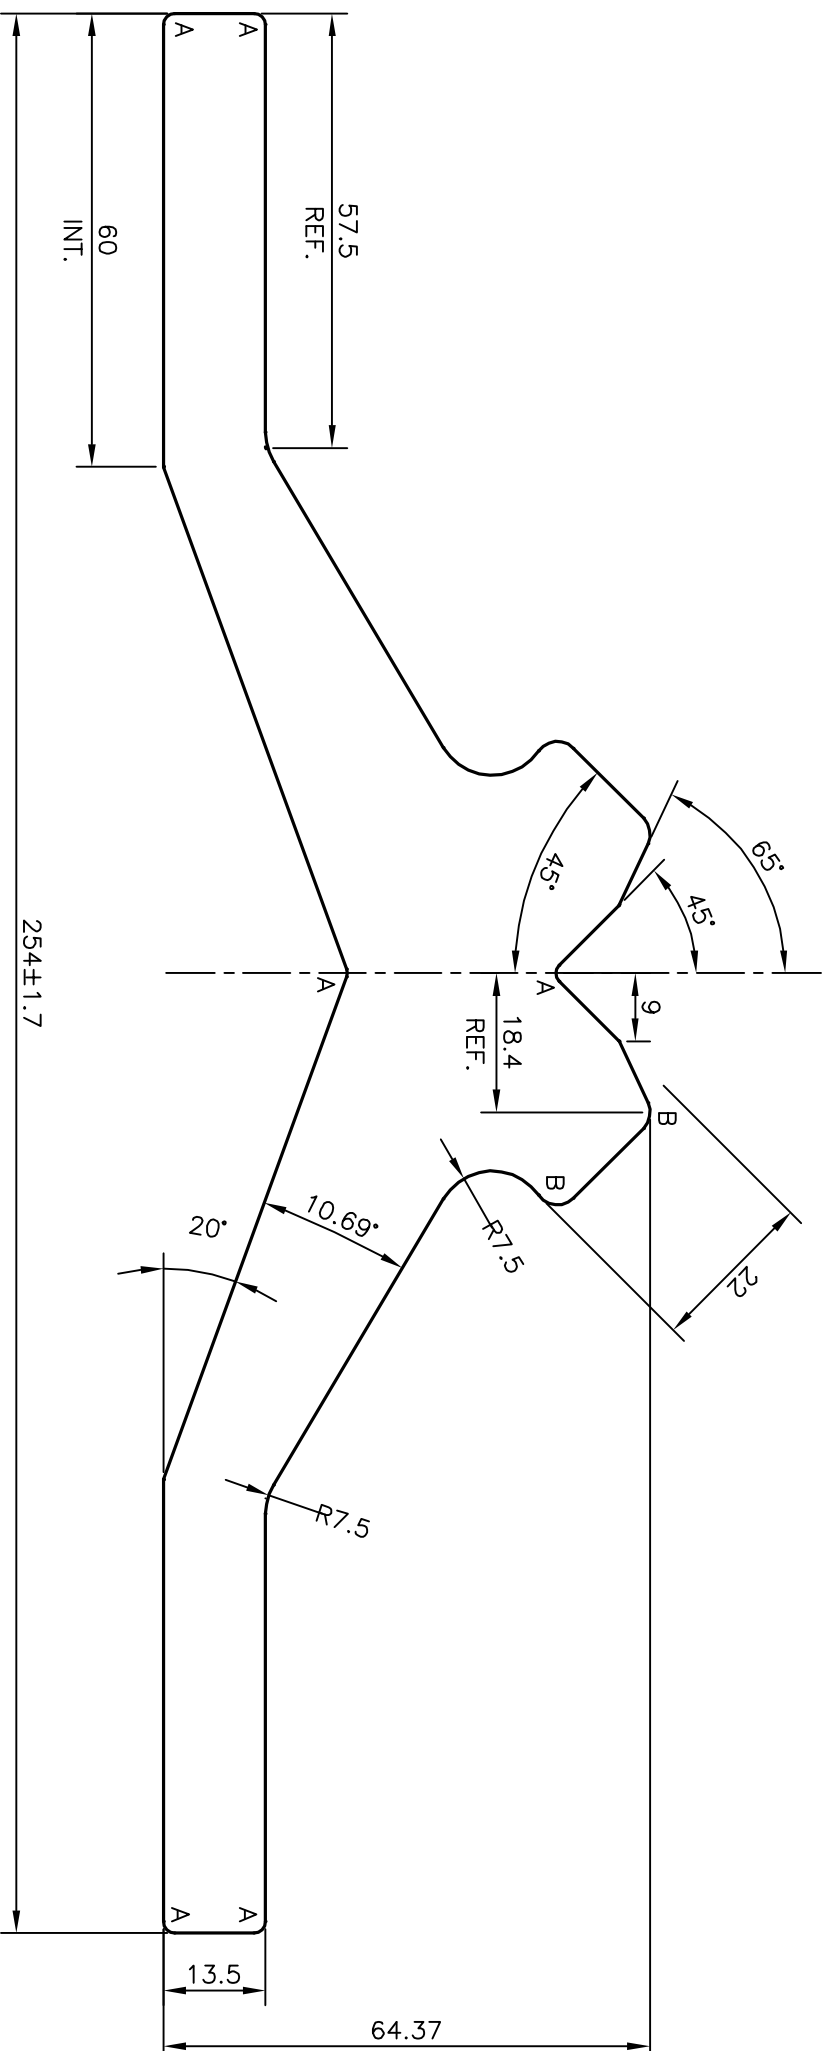

A = R1.5 mm,(6 PLACES)  
B = R3 mm,(2 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 <p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>		<p><b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)</p>	
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED</p>			
PARTY'S NAME	APPEX INDUSTRIES, HARYANA		
PARTY'S DRAWING No.	CD 277002 1204		
ALLOY & TEMPER	6082 T6		
DESCRIPTION	COUNTER SUPPORT PROFILE		
		NAME	DATE
		DARPAN	20-10-2018
		CHECKED	
		APPROVED	B.NATARAJA 06-11-2018
		SCALE	1:1
		AREA mm <sup>2</sup>	5407.438
		PERIMETER mm.	610.754
		WEIGHT kg/m	14.600
		DRAWING No.	SECTION No.
		P-18781	-
		S6023	S6023