


P-18850-1

S6058

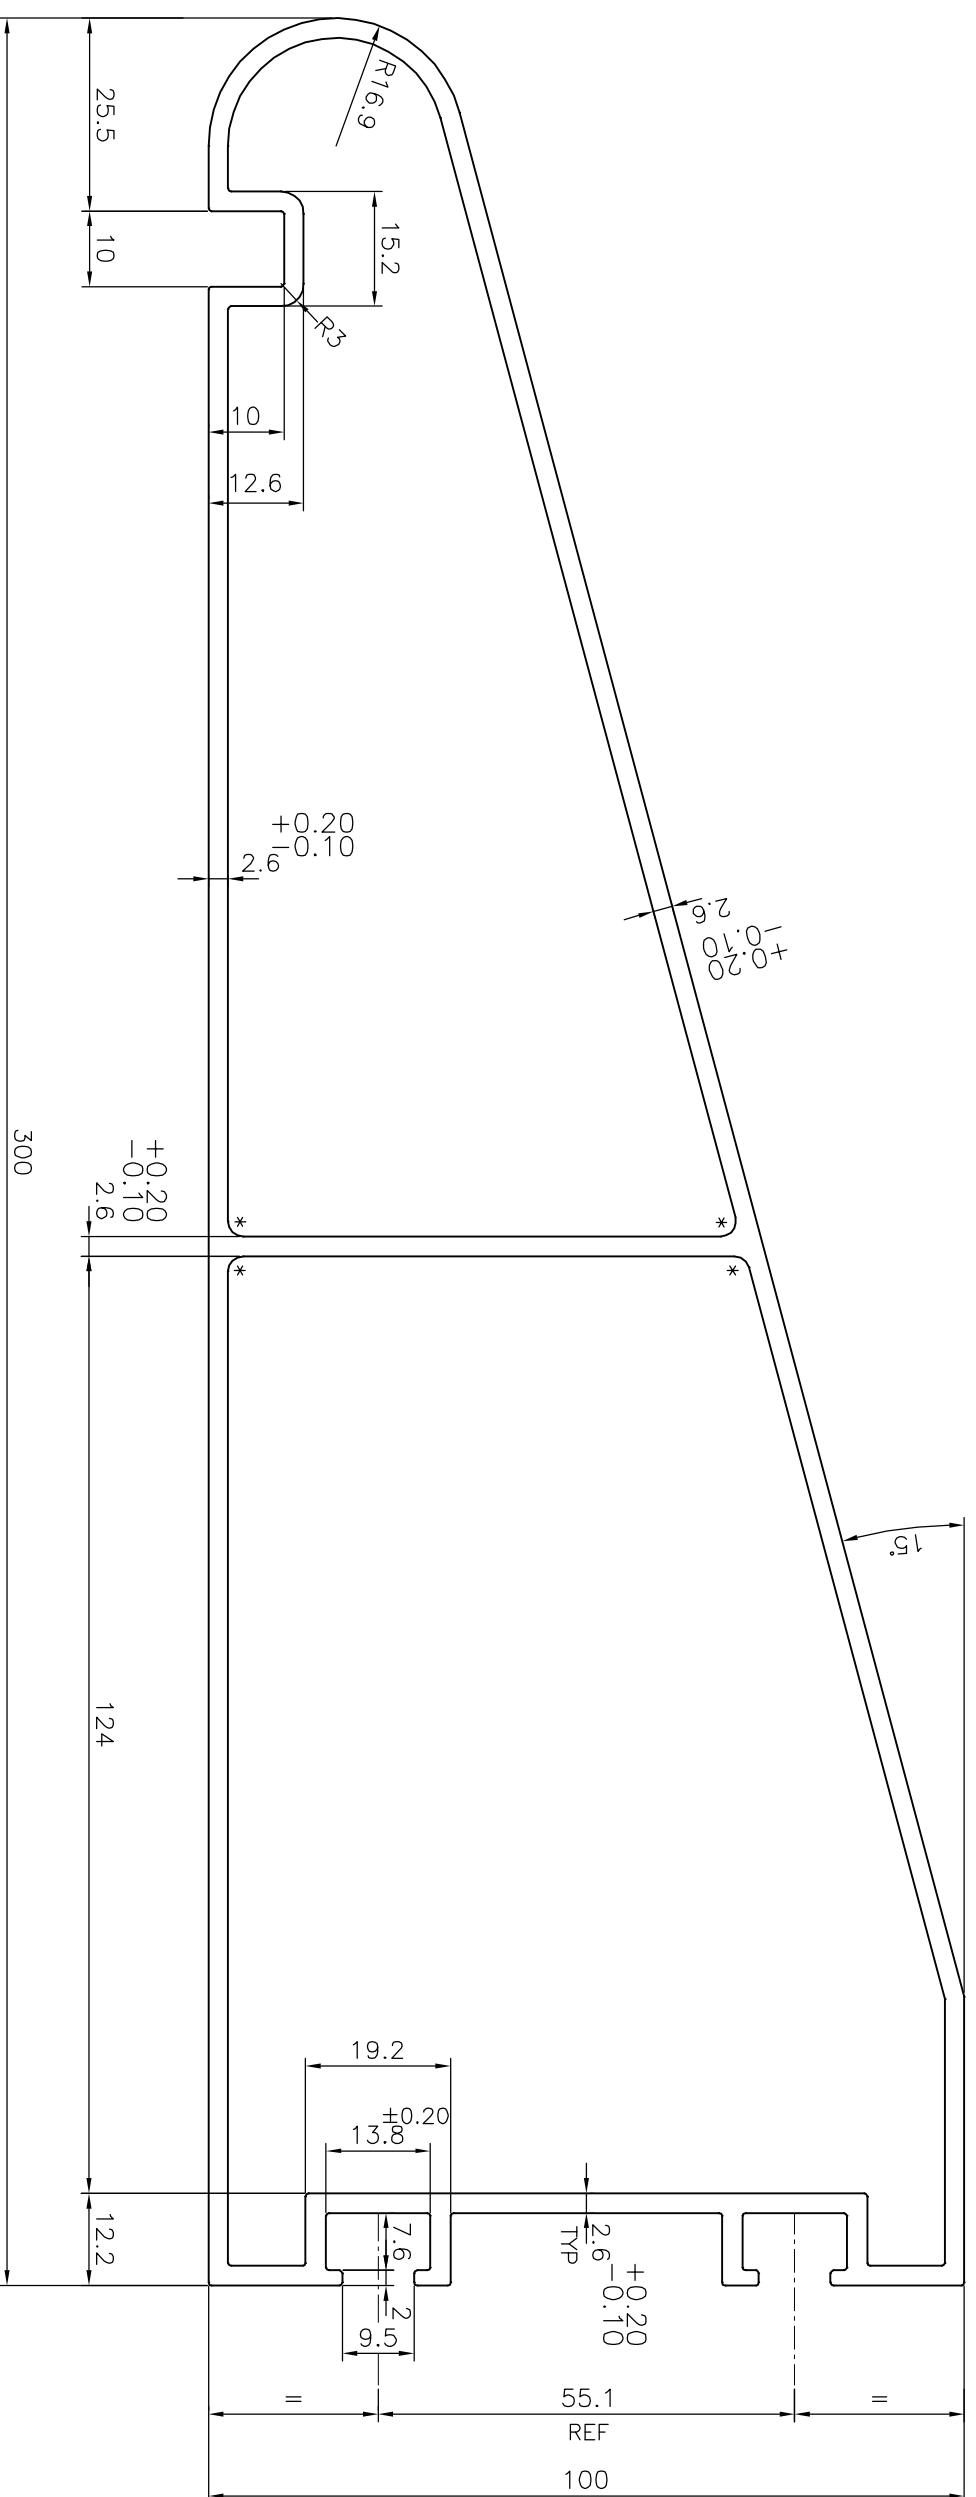


TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO	±0.30	UPTO	80.0mm	±0.70	UPTO	180.0mm	±1.27
UPTO	30.0mm	UPTO	100.0mm	±0.80	UPTO	200.0mm	±1.40
UPTO	40.0mm	UPTO	120.0mm	±0.90	UPTO	225.0mm	±1.52
UPTO	50.0mm	UPTO	140.0mm	±1.00			
UPTO	60.0mm	UPTO	160.0mm	±1.14			

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH

* = 2.0 RADIUS (4 PLACES)

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		NAME	DATE
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED		DRAWN	J.P.KAUSHIK	30-11-2018	
PARTY'S NAME		MIDAS ARCHITECTURAL SYSTEMS LLP, MUMBAI	CHECKED		
PARTY'S DRAWING No.		AS PER DRAWING AL-02	APPROVED	B.NATARAJA	03-12-2018
ALLOY & TEMPER		6063 T6	SCALE	1:1	
DESCRIPTION		300 mm FIN SECTION	AREA mm ²	2218.652	
			PERIMETER mm.	818.369	
			WEIGHT kg/m	5.990	
			DRAWING No.	P-18850-1	SECTION No.
				S6058	S6058