


P-18918

S6080

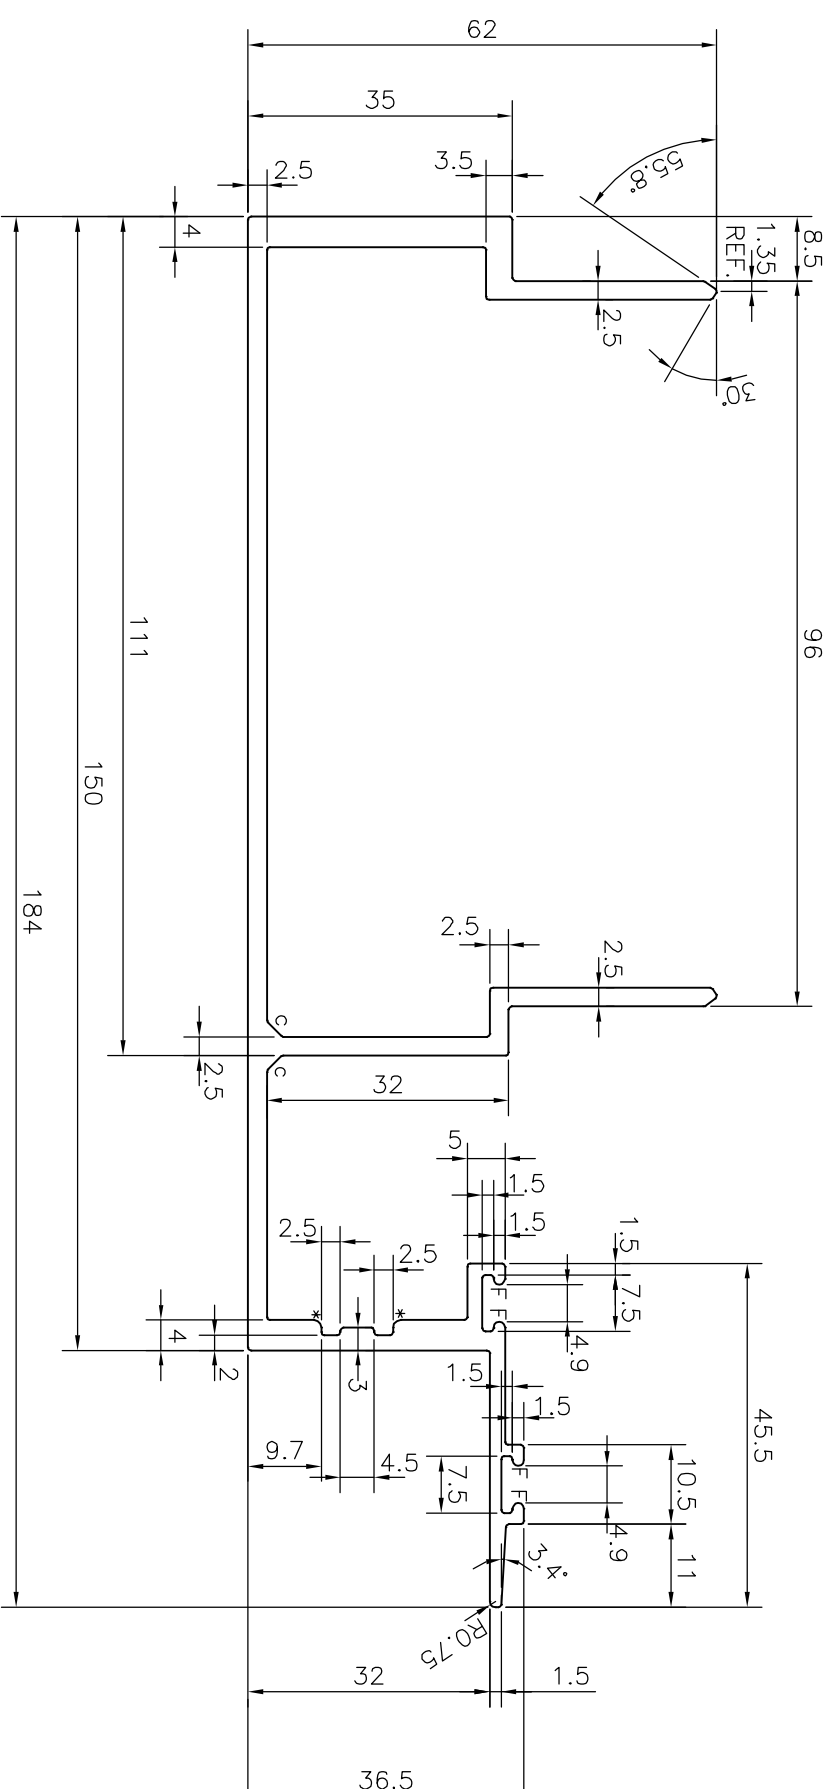

* = RADIUS 1.0 (2 PLACES)
 c = CHAMFER 2x45° (2 PLACES)
 F = FULL RADIUS (4 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

JINDAL
 SYMBOL OF QUALITY
 AN ISO 9001 COMPANY
JINDAL ALUMINIUM LTD.
 BANGALORE-560073 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
 3. TOLERANCES WILL BE AS PER IS:3965-1981 UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	PSP PROJECTS LTD., SURAT	SCALE	1:1
PARTY'S DRAWING No.	FCD: AL-1001	AREA mm ²	966.128
ALLOY & TEMPER	6063 T6	PERIMETER mm.	733.998
DESCRIPTION	CURTAIN WALL MALE MULLION SECTION	WEIGHT kg/m	2.609
		DRAWING No.	SECTION No.
		P-18918	-
		S6080	S6080

