




P-20158

S6485



DETAIL OF "A"
SCALE 3:1

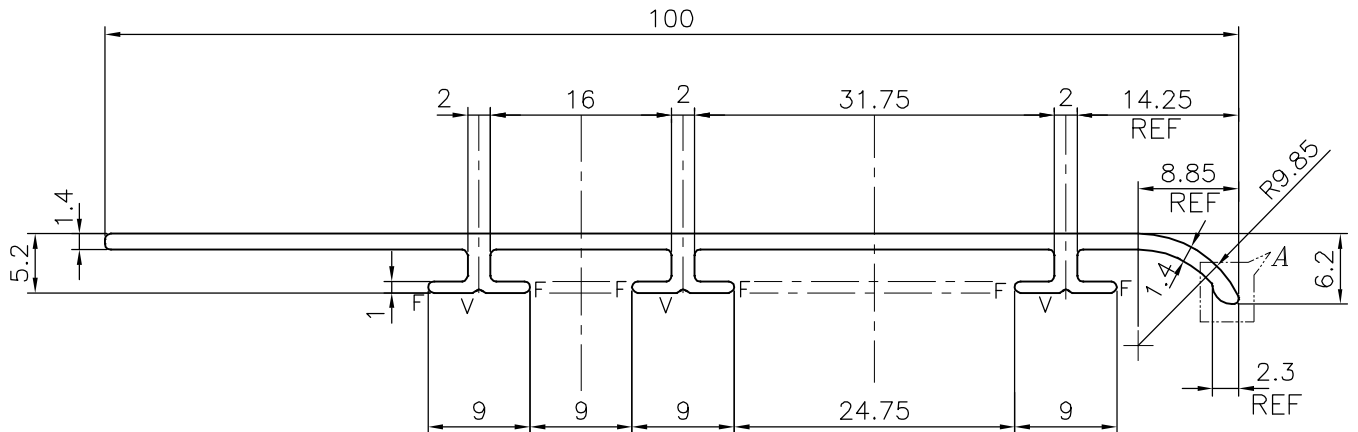

UNSPECIFIED RADIUS 0.5 mm
F = FULL RADIUS (6 PLACES)
V = V GROOVE 0.3x90° (3 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	18-09-2019
CHECKED		
APPROVED	B.NATARAJA	21-09-2019

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED

SCALE	1.5:1
AREA mm ²	185.89
PERIMETER mm.	265.724
WEIGHT kg/m	0.502

PARTY'S NAME ALUCRAFT, BANGALORE

DRAWING No. SECTION No.

PARTY'S DRAWING No. AS PER DRAWING

P-20158
S6485

ALLOY & TEMPER 6063 T6

DESCRIPTION SKIRTING PROFILE TYPE-02