


P-20394-1


S6555

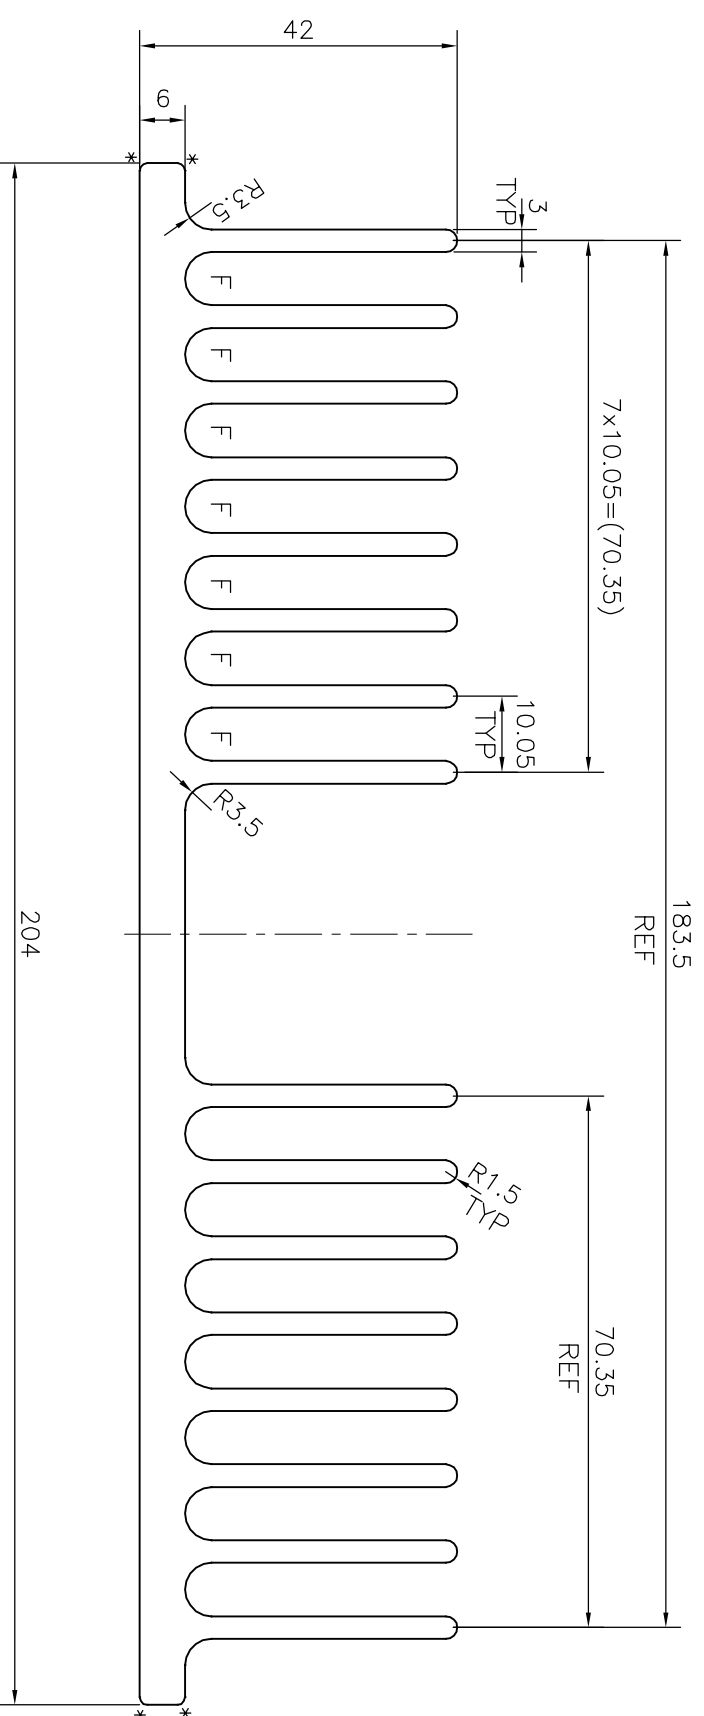

F = FULL RADIUS (14 PLACES)  
 \* = 1.0 RADIUS (4 PLACES)

## TOLERANCES ON OVERALL WIDTHS &amp; WIDTHS ACROSS FLATS OF BARS, &amp; REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		<b>JINDAL ALUMINIUM LTD.</b> <b>BANGALORE-560073 (INDIA)</b>		DRAWN <i>J.P.KAUSHIK</i> 11-11-2019 CHECKED APPROVED <i>B.NATARAJA</i> 15-11-2019 SCALE 1:1 AREA mm <sup>2</sup> 3020.869 PERIMETER mm. 1501.31 WEIGHT kg/m 8.156 DRAWING No. SECTION No.
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED				
PARTY'S NAME	HUAPTEC TELECOM INDIA PVT. LTD., BANGALORE			
PARTY'S DRAWING No.	AS PER SAMPLE			
ALLOY & TEMPER	6063 T6			
DESCRIPTION	HEAT SINK SECTION			