



P-20646


S6712

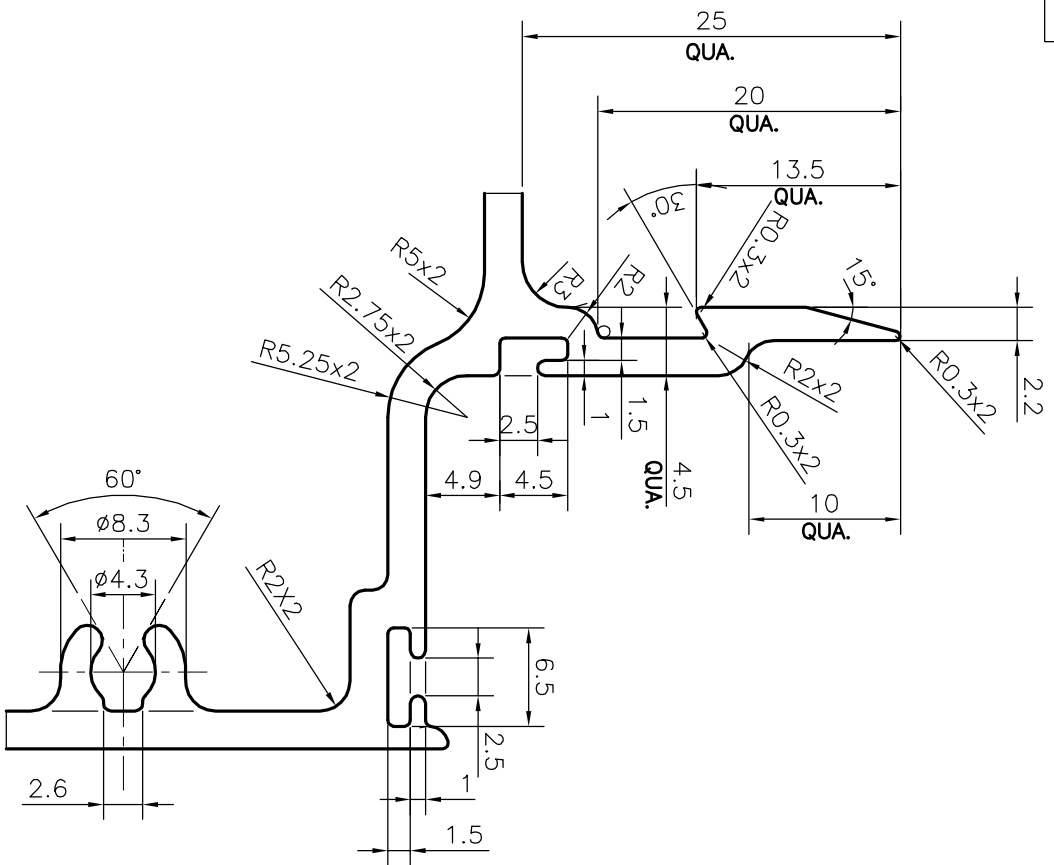

SCALE: - 2:1  
DETAIL OF "A"

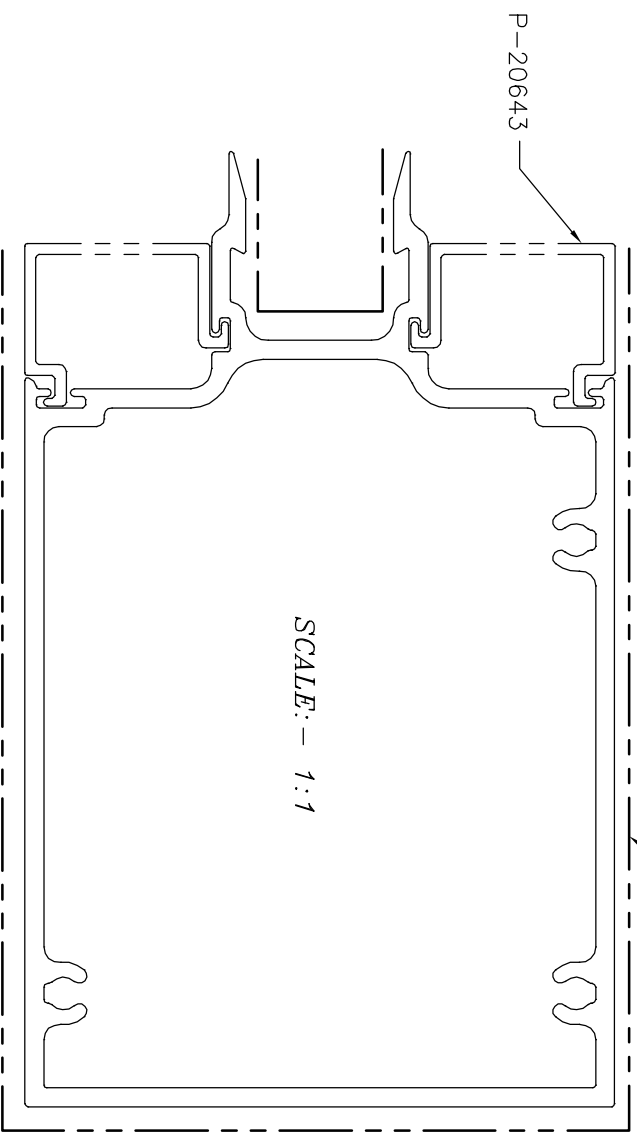

EXPOSED SURFACE

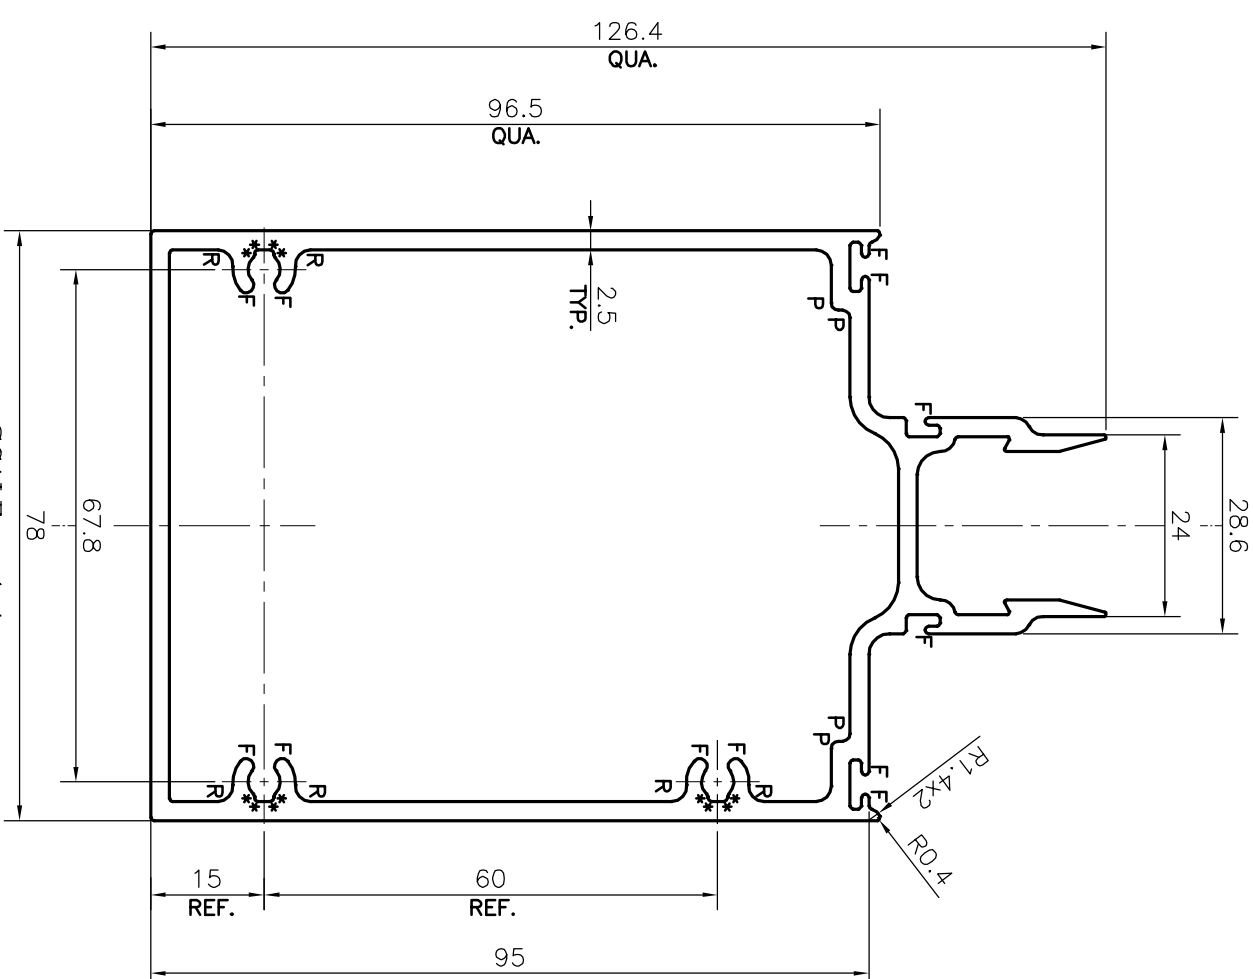

P=1mm RADIUS (04 PLACES)  
R=2mm RADIUS (06 PLACES)  
\*=0.5mm RADIUS (12 PLACES)  
F=FULL RADIUS (12 PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS			
UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27	
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40	
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52	
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00		
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14		

<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>	<p><b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)</p>	DRAWN	NAME	DATE
		CHECKED	DARPAN	29-01-2020
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED</p>		APPROVED	B.NATARAJA	04-02-2020
<p>PARTY'S NAME PARTY'S DRAWING No. ALLOY &amp; TEMPER</p>		<p>SCALE AREA mm<sup>2</sup> PERIMETER mm. WEIGHT kg/m</p>		
<p>6063 T6</p>		<p>1:1 1094.5 497.635 2.955</p>		
<p>25-09-19R1</p>		<p>DRAWING No. SECTION No.</p>		
<p>6063 T6</p>		<p>P-20646 - S6712 S6712</p>		
<p>CURTAIN WALL SECTION</p>				

<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED</p>	
<p>PARTY'S NAME PARTY'S DRAWING No. ALLOY &amp; TEMPER</p>	
<p>6063 T6</p>	
<p>CURTAIN WALL SECTION</p>	