

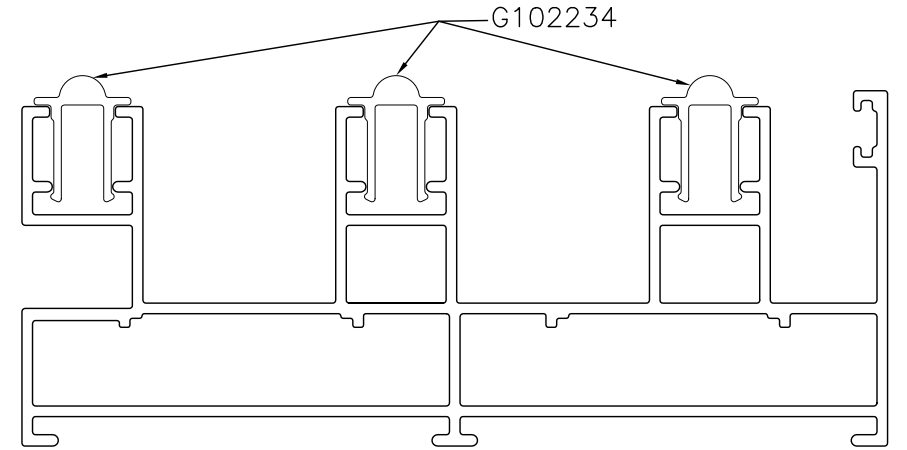


P-JAL-B-479
X102229

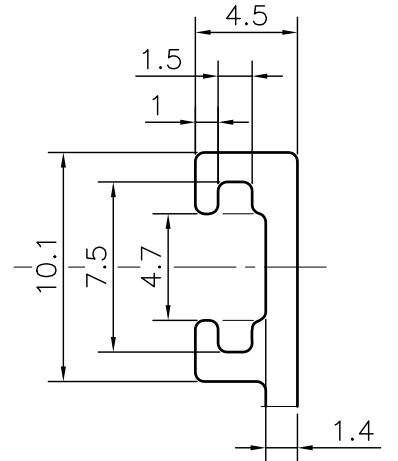

SCALE 1:1

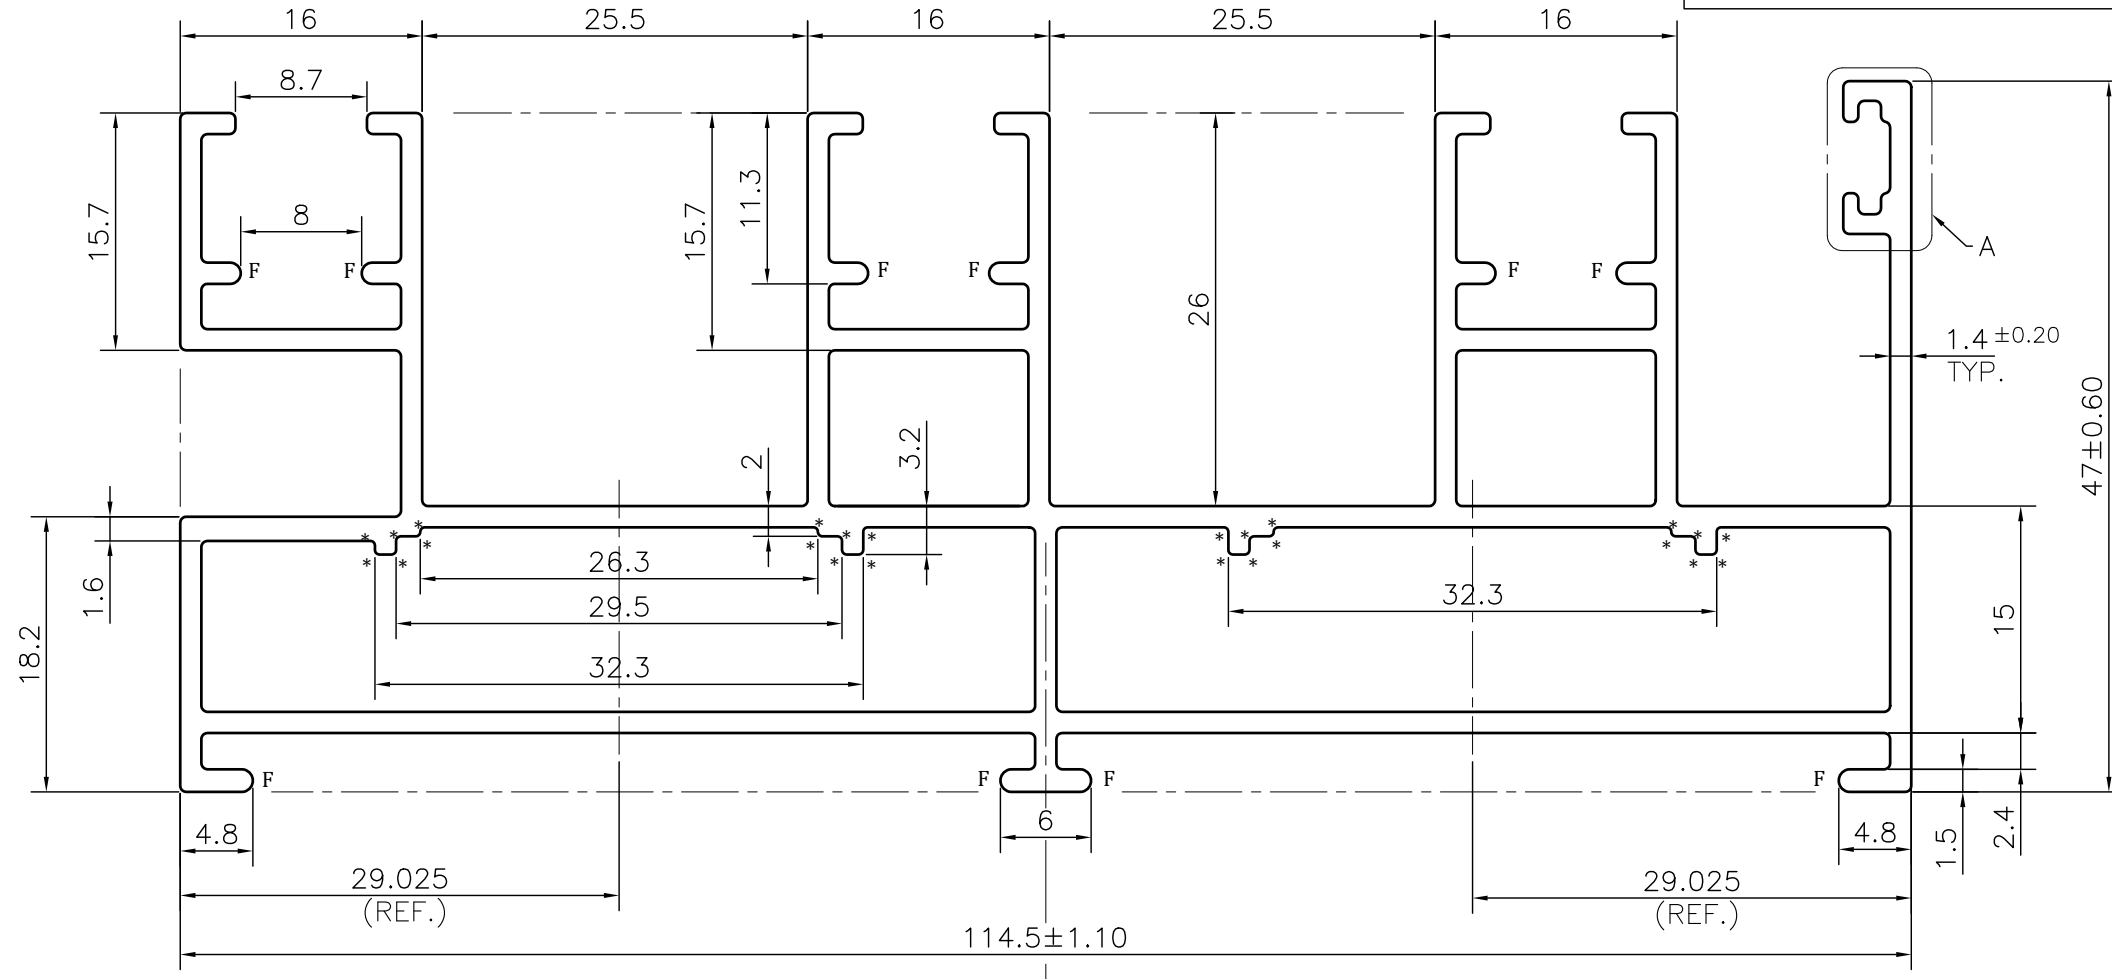

DETAIL A
SCALE 3:1

NOTE:-
* = 0.30 RADIUS (24 PLACES)
F = FULL RADIUS (10 PLACES)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

Q01693
CONTROLLED COPY

<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>	<p>JINDAL ALUMINIUM LTD. BHIWADI-301019 (INDIA)</p>		NAME	DATE	
			DRAWN	ASHUTOSH	29-04-2024
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED</p>			CHECKED	PARVESH	15-05-2024
			APPROVED	J.N.RAI	15-05-2024
<p>PARTY'S NAME</p>			WINDOOR TECH, GURUGRAM		
			<p>PARTY'S DRAWING No.</p>		
<p>ALLOY & TEMPER</p>			6063 T6		<p>PRODUCT CODE:-048</p> <p>HSN CODE:- 76042100</p>
			<p>DESCRIPTION</p>		
<p>DRAWING No.</p>			P-JAL-B-479		SECTION No.
<p>DRAWING No.</p>			X102229		X102229

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD ≤ 100	100 < CD ≤ 200	200 < CD ≤ 300	300 < CD ≤ 500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 - 25.0	±0.30	±0.40	±0.50	±0.60
25.0 - 50.0	±0.50	±0.60	±0.80	±0.90
50.0 - 100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80