


P-JAL-B-554-1

X102368

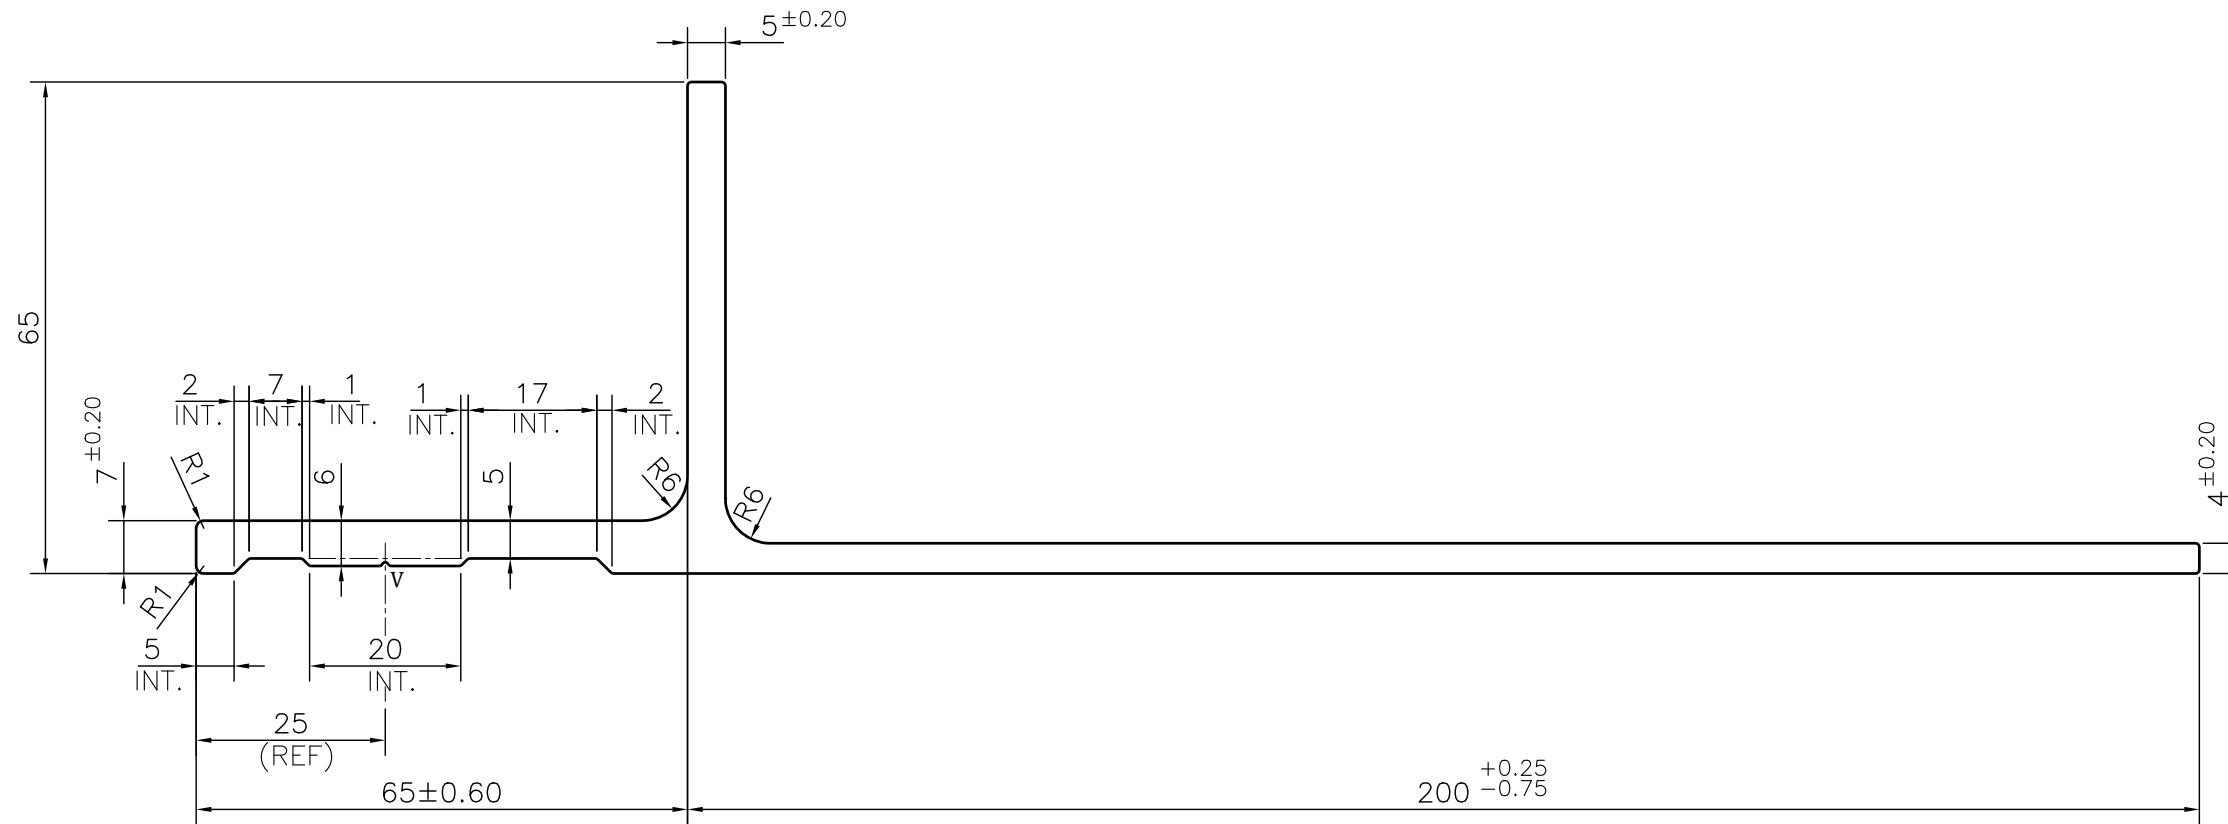

NOTE:-

- ☞ ROUND OFF ALL SHARP CORNERS WITH 0.50 mm.
- ☞ FE:- NOT MORE THAN 0.4%, MG:- 0.8 TO 1.2%
- ☞ HARDNESS :- 56HRB
- ☞ UTS :- 280 TO 300 MIN MPA


NOTE:-

V= 0.5x60° V-GROOVE (1 PLACE)

1. STRAIGHTNESS= 1.0mm/M
2. TWIST= 1.0mm/M
3. ANGULARITY= ±1°
4. FLATNESS= ±0.50mm

Q01935

CONTROLLED COPY

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BHIWADI-301019 (INDIA)		NAME	DATE	
			DRAWN	ASHUTOSH	01-06-2024
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm. 3. TOLERANCES WILL BE AS PER EN 12020-2 , UNLESS OTHERWISE SPECIFIED			CHECKED	PARVESH	15-06-2024
			APPROVED	N.K.HOLEY	15-06-2024
PARTY'S NAME KNEST MANUFACTURERS LLP, PUNE			SCALE	1:1	
			AREA mm ²	1499.423	
PARTY'S DRAWING No. AS PER DRAWING			PERIMETER mm.	655.83	
			WEIGHT kg/m	4.048	
ALLOY & TEMPER 6061 T6			DRAWING No.	SECTION No.	
			P-JAL-B-554-1	7000002545	
DESCRIPTION FORM WORK SECTION- 265 T PROFILE			X102368	X102368	
			PRODUCT CODE:-029 HSN CODE:- 76042990		