
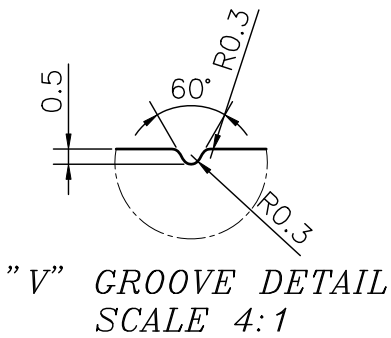


P-JAL-B-894-2
X103688

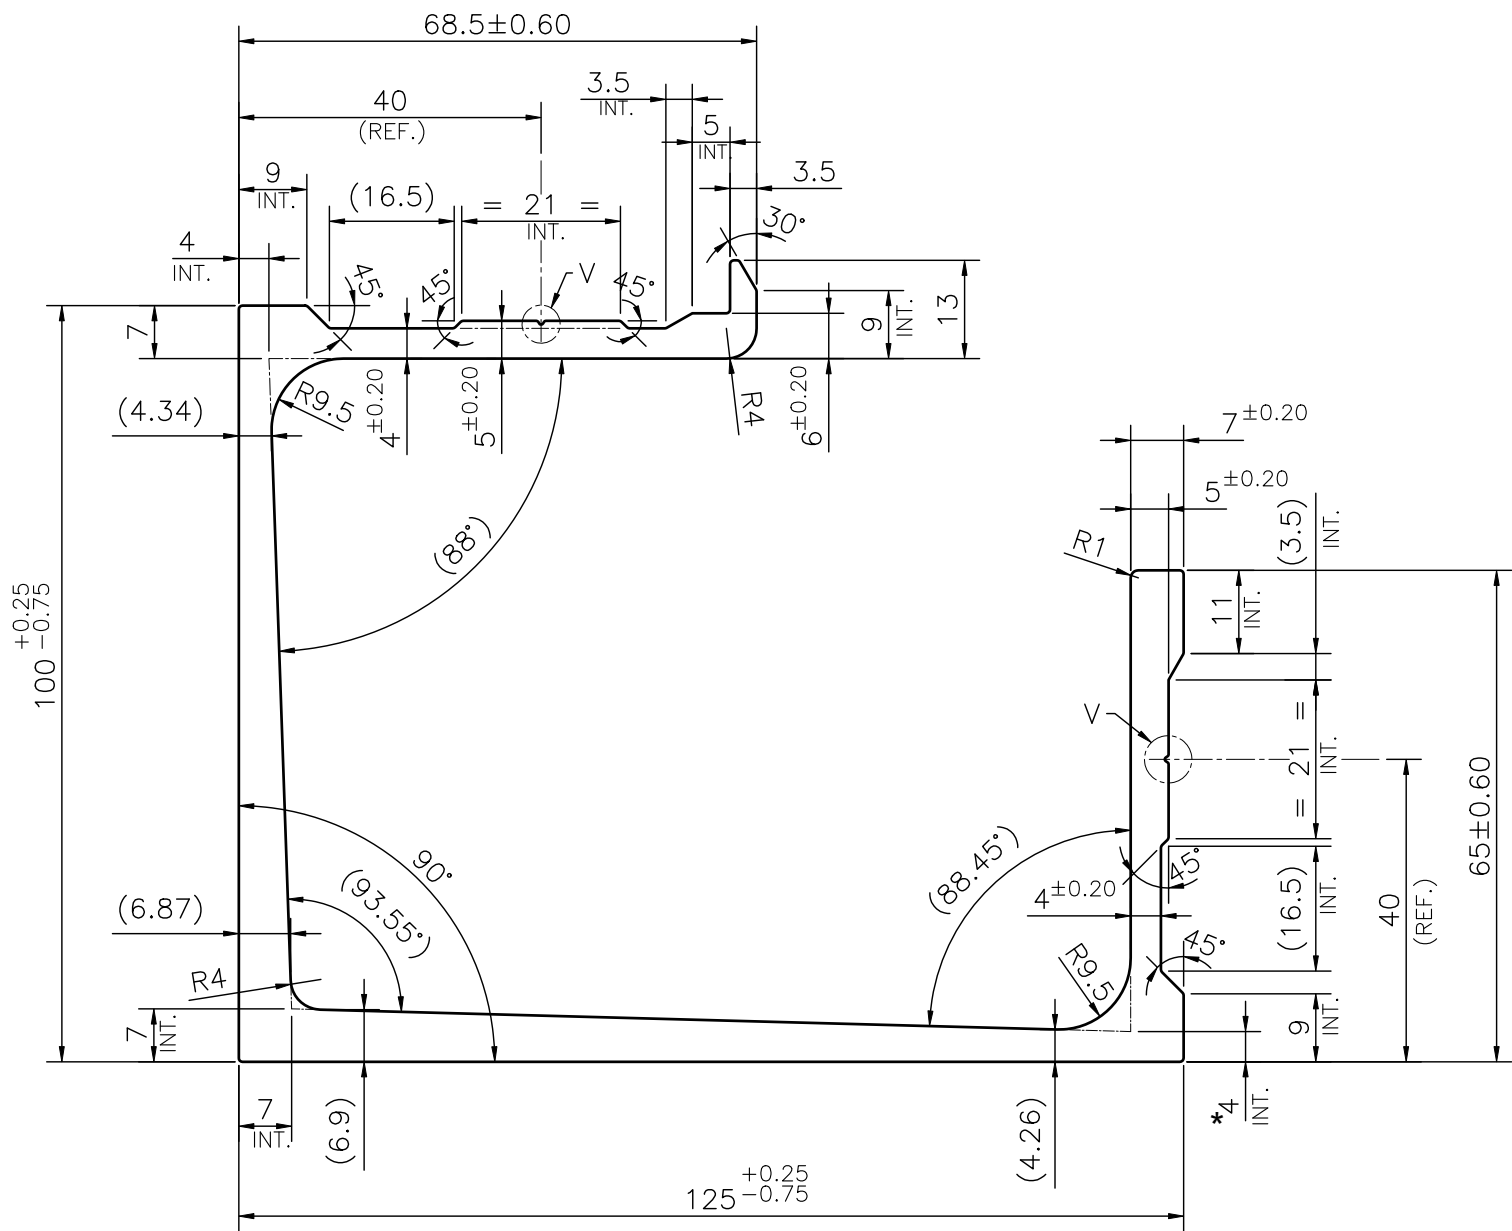

- NOTE:-
- 👉 ROUND OFF ALL SHARP CORNERS WITH 0.50 mm.
 - 👉 FE:- NOT MORE THAN 0.4%, MG:- 0.8 TO 1.2%
 - 👉 HARDNESS :- 56HRB
 - 👉 UTS :- 280 TO 300 MIN MPA

1. STRAIGHTNESS= 1.0mm/M
2. TWIST= 1.0mm/M
3. ANGULARITY= ±1°
4. FLATNESS= ±0.50mm

Q02932		3. ANGULARITY= ±1° 4. FLATNESS= ±0.50mm			
CONTROLLED COPY					
 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BHIWADI-301019 (INDIA)		DRAWN	ASHUTOSH	23-01-2025
			CHECKED	PARVESH	25-03-2025
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED		APPROVED	J.N.RAI	25-03-2025	
		SCALE		1:1	
		AREA mm ²		1893.454	
		PERIMETER mm.		698.11	
		WEIGHT kg/m		5.112	
PARTY'S NAME	KNEST MANUFACTURERS LLP, PUNE		DRAWING No.		SECTION No.
PARTY'S DRAWING No.	AS PER DRAWING-Knest_125SL_2024-25		P-JAL-B-894-2		7000003937
ALLOY & TEMPER	6061 T6	PRODUCT CODE:-029	X103688		X103688
		HSN CODE:- 76042990			
DESCRIPTION	FORM WORK SECTION- 125 SL PROFILE				