
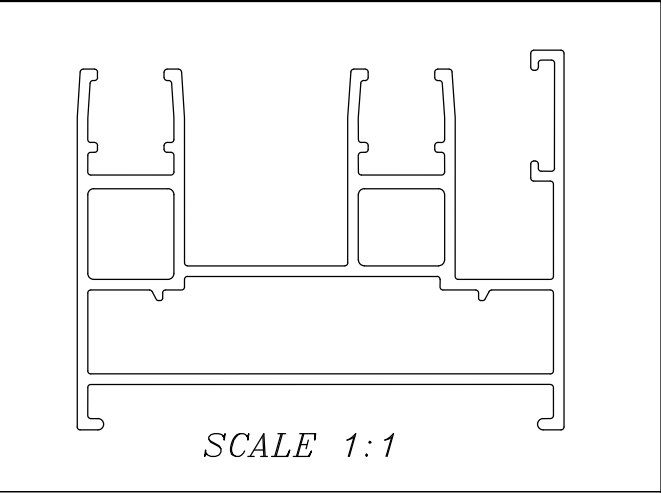


P-JAL-B-1070
X104076

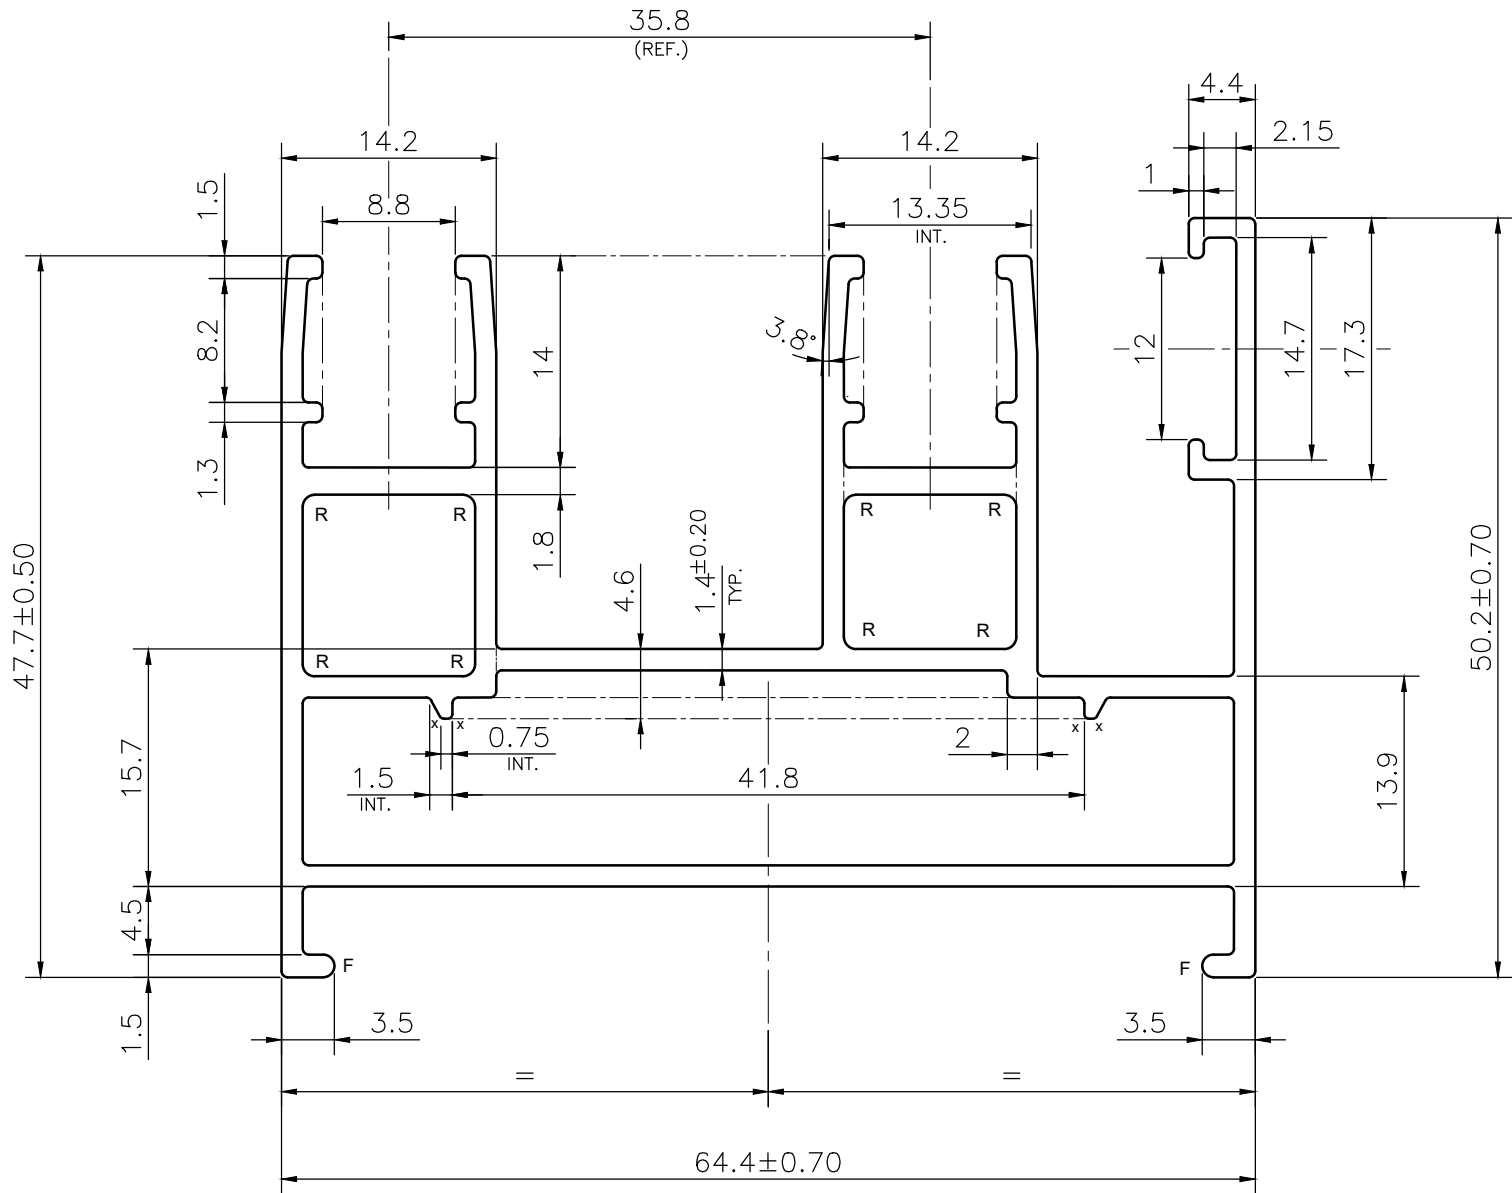

NOTE:-
x= 0.30 RADIUS (4 PLACES)
R= 0.80 RADIUS (8 PLACES)
F= FULL RADIUS (2 PLACES)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

Q03278/Q02528

CONTROLLED COPY



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME SAY METAL LLP, GURUGRAM

PARTY'S DRAWING No. AS PER CAD DRAWING

ALLOY & TEMPER 6063 T6 PRODUCT CODE:-048
HSN CODE:- 76042100

DESCRIPTION WINDOW SECTION-2 TRACK

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE				
DIMENSION	CD≤100	100<CD≤200	200<CD≤300	300<CD≤500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 -25.0	±0.30	±0.40	±0.50	±0.60
25.0 -50.0	±0.50	±0.60	±0.80	±0.90
50.0 -100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80

	NAME	DATE
DRAWN	ASHUTOSH	04-06-2025
CHECKED	PARVESH	26-06-2025
APPROVED	J.N.RAI	26-06-2025
SCALE		2:1
AREA mm ²		496.783
PERIMETER mm.		437.74
WEIGHT kg/m		1.341
DRAWING No.		SECTION No.
P-JAL-B-1070		7000004443
X104076		X104076