



P-4182

9399

20994

X1106

V = 0.3x90° GROOVE
 A = 6.0 mm. RADIUS (3)
 B = 12.0 mm. RADIUS (2)
 R = 1.5 mm. RADIUS (3)
 E = 0.7 mm. RADIUS (8)
 C = 3.0 mm. RADIUS (2)
 GENERAL WALL THICKNESS:- 2.0 mm.
 ----- EXPOSED SURFACE

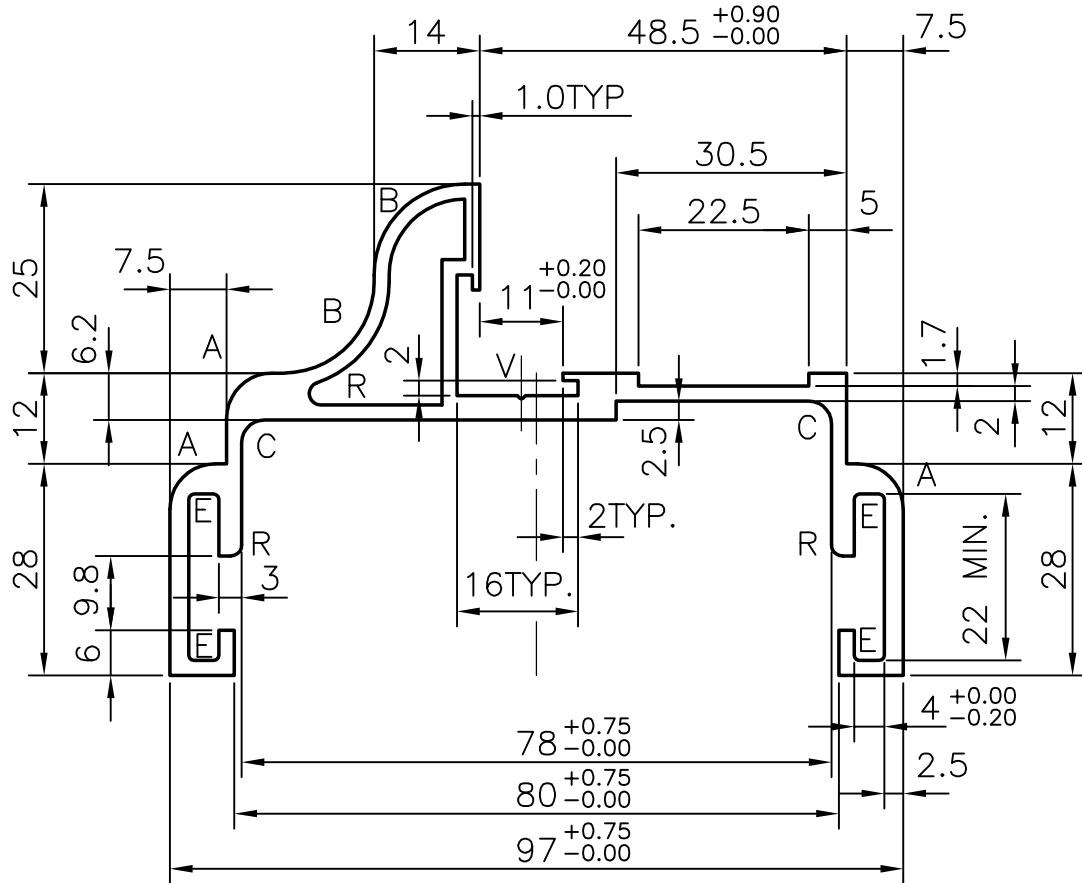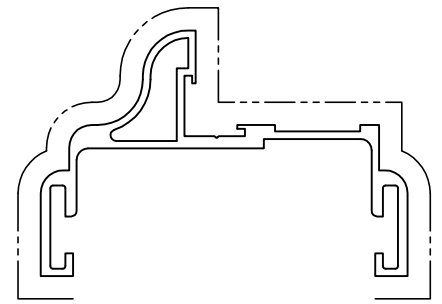

SYMBOL OF QUALITY
 AN ISO 9002 COMPANY

JINDAL ALUMINIUM LTD.
 BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	R.D.Sharma	26-03-03
CHECKED		
APPROVED		

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS 1474-1987 UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm ²	697.5
PERIMETER mm.	468.8
WEIGHT kg/m	1.883
SECTION No.	X1106
DRAWING No.	X1106

PARTY'S NAME	KOMFORT OFFICE ENVIRONMENTS PLC., U.K.
PARTY'S DRAWING No.	D4/M20K/0000 (ISSUE-05)
ALLOY & TEMPER	6063 TF
DESCRIPTION	MIRAGE 75 mm. DOOR FRAME