P–5859–2	
21172	
X1129	

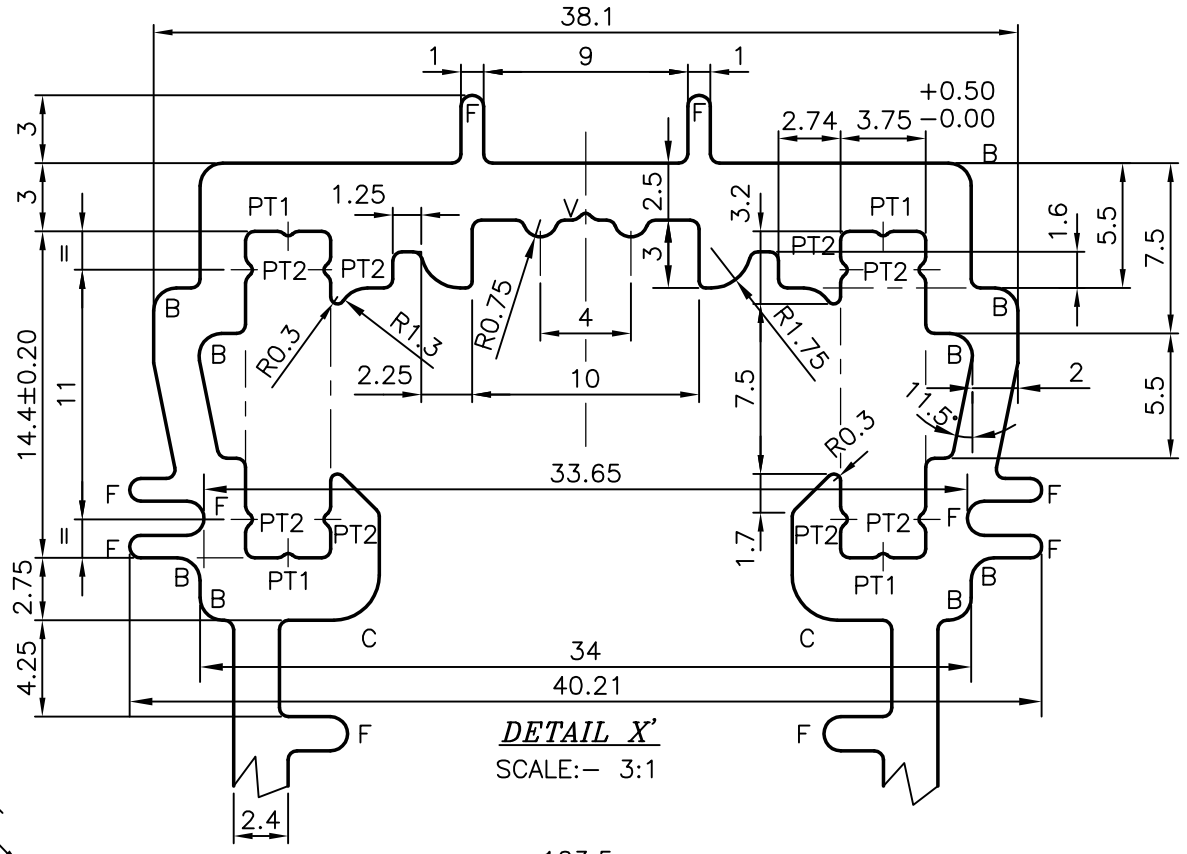



DETAIL"A"
SCALE 3:1

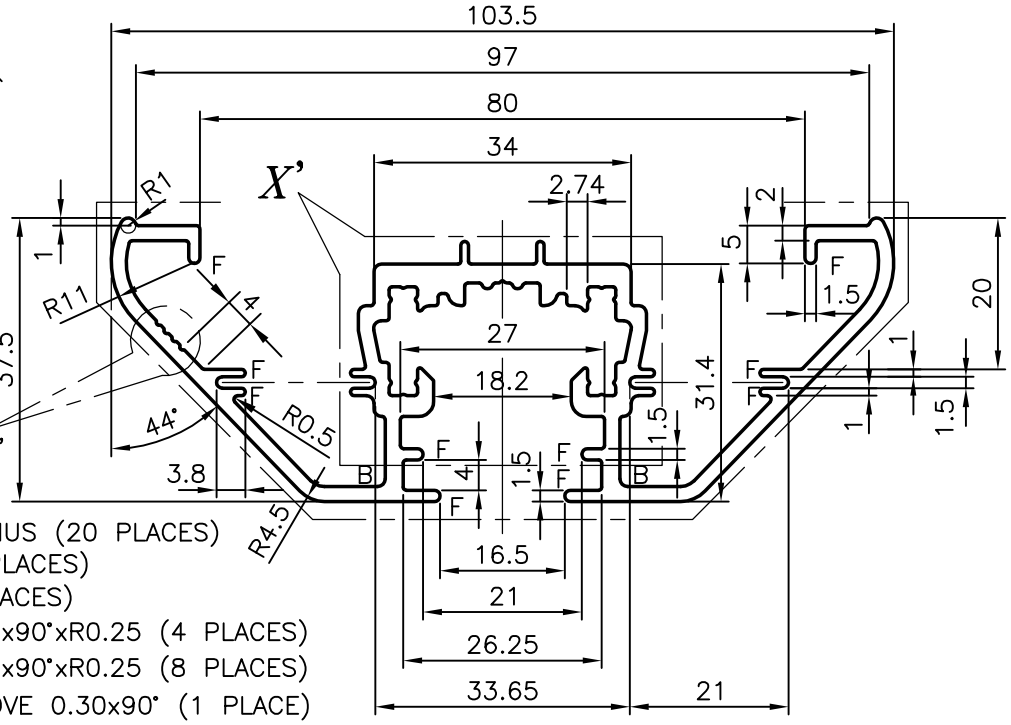

F = FULL RADIUS (20 PLACES)
B = R1 (12 PLACES)
C = R2 (2 PLACES)
PT1 = PIP 0.2x90°xR0.25 (4 PLACES)
PT2 = PIP 0.3x90°xR0.25 (8 PLACES)
V = VEE GROOVE 0.30x90° (1 PLACE)
GENERAL WALL THICKNESS = 2 mm
——— – ——— VISIBLE SURFACE

JINDAL
SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.

BANGALORE–560073 (INDIA)

	NAME	DATE
DRAWN	RAGHAVENDRA	15–11–2006
CHECKED		
APPROVED		

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER EN12020–2:2001 UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm^2	624.081
PERIMETER mm.	592.505
WEIGHT kg/m	1.685

PARTY'S NAME	KOMFORT OFFICE ENVIRONMENTS PLC., U.K.
PARTY'S DRAWING No.	D3/SJ4/0000 ISSUE 2
ALLOY & TEMPER	6063 T6
DESCRIPTION	SINGLE GLAZED POLAR ADAPTOR POST

DRAWING No.	SECTION No.
P–5859–2	–
21172	21172
X1129	X1129