



C = 0.50mm RADIUS (25 PLACES)
 F = FULL RADIUS (20 PLACES)
 V = VEE GROOVE 0.3 DEEPx90° (1 PLACE)

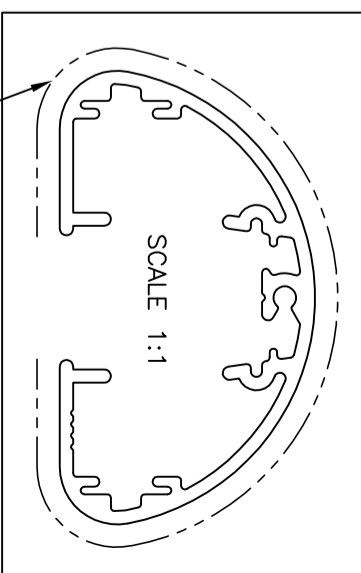

UNSPECIFIED WALL THICKNESS = 1.75mm
 ALL UNSPECIFIED RADIUS TO BE 0.40mm

 <p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>			<p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p>		
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER EN12020-2:2001 UNLESS OTHERWISE SPECIFIED</p>					
<p>PARTY'S NAME</p>		<p>KOMFORT OFFICE ENVIRONMENTS PLC-U.K</p>			
<p>PARTY'S DRAWING No.</p>		<p>D4/SJ10/0000 ISSUE--2</p>			
<p>ALLOY & TEMPER</p>		<p>6063 TF</p>			
<p>DESCRIPTION</p>		<p>RADIUS STOP END</p>			
<p>DRAWN</p>	<p>RAGHAVENDRA</p>	<p>29-11-2006</p>	<p>NAME</p>	<p>DATE</p>	
<p>CHECKED</p>					
<p>APPROVED</p>					
<p>SCALE</p>		<p>3:1</p>			
<p>AREA mm²</p>		<p>353.386</p>			
<p>PERIMETER mm.</p>		<p>381.406</p>			
<p>WEIGHT kg/m</p>		<p>0.954</p>			
<p>DRAWING No.</p>		<p>SECTION No.</p>			
<p>P-6737-2</p>		<p>—</p>			
<p>21173</p>		<p>21173</p>			
<p>X1130</p>		<p>X1130</p>			