


P-12829

X1680


TOLERANCE APPROVAL AS PER Sh. U.C.D

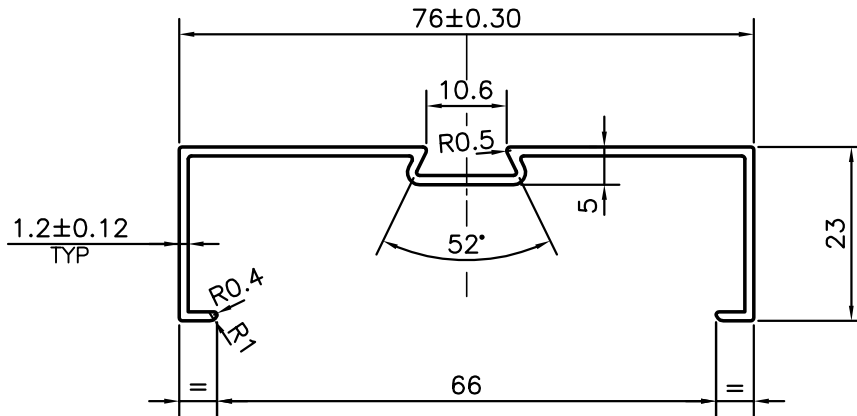

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

	CD≤100	100<CD≤200	200<CD<300	300<CD<500
UPTO 10mm - ±0.25	±0.30	±0.35	±0.40	
10.0 -25.0 - ±0.30	±0.40	±0.50	±0.60	
25.0 -50.0 - ±0.50	±0.60	±0.80	±0.90	
50.0 -100.0 - ±0.70	±0.90	±1.10	±1.30	
100 - 150 - -	±1.10	±1.30	±1.50	
150 - 200 - -	±1.3	±1.50	±1.80	
200 - 300 - -	-	±1.70	±2.10	
300 - 450 - -	-	-	±2.80	

PLEASE CONFIRM ALL THE DIMENSIONS AND MATCH WITH YOUR MATCHING COMPONENT

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> <b>BANGALORE-560073 (INDIA)</b>	DRAWN	J.P.KAUSHIK	08-06-2013
		CHECKED		
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER BS:EN-755-9 UNLESS OTHERWISE SPECIFIED		APPROVED	S.S.GARG	21-06-2013
		SCALE		1:1
PARTY'S NAME COMARK LANKA (PVT.) LIMITED, COLOMBO		AREA mm <sup>2</sup>		163.796
		PERIMETER mm.		272.133
PARTY'S DRAWING No. 9156		WEIGHT kg/m		0.442
		DRAWING No.		SECTION No.
ALLOY & TEMPER 6063 T6		P-12829		-
		X1680		X1680
DESCRIPTION WINDOW SECTION				