


P-16768-2

X2124

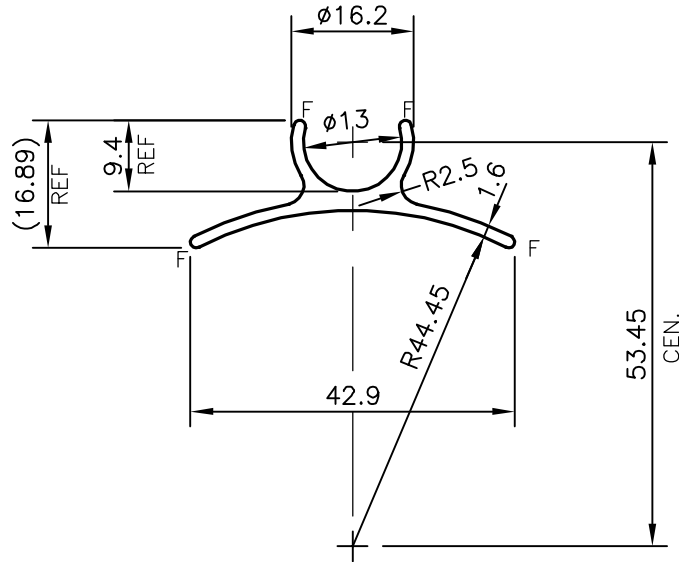

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

CD ≤ 100	100 < CD ≤ 200	200 < CD < 300	300 < CD < 500
UPTO 10mm - ± 0.25	± 0.30	± 0.35	± 0.40
10.0 - 25.0 - ± 0.30	± 0.40	± 0.50	± 0.60
25.0 - 50.0 - ± 0.50	± 0.60	± 0.80	± 0.90
50.0 - 100.0 - ± 0.70	± 0.90	± 1.10	± 1.30
100 - 150 - -	± 1.10	± 1.30	± 1.50
150 - 200 - -	± 1.3	± 1.50	± 1.80
200 - 300 - -	-	± 1.70	± 2.10
300 - 450 - -	-	-	± 2.80

F = FULL RADIUS (4 PLACES)



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	11-02-2017
CHECKED		
APPROVED	B.NATARAJ	23-02-2017
SCALE		1:1
AREA mm ²		123.24
PERIMETER mm.		126.78
WEIGHT kg/m		0.333
DRAWING No.	SECTION No.	
P-16768-2	-	
X2124	X2124	

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER BS:EN-755-9 UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	PROSOURCE INDL. SOLUTIONS INC., CANADA
PARTY'S DRAWING No.	AS PER DRAWING & REQUIREMENT
ALLOY & TEMPER	6063 T5
DESCRIPTION	MISC. SECTION